



## IRRIGATION ID TAGS STANDARD YELLOW

# PRODUCT SPECIFICATIONS



**PRODUCT TYPE:** Valve Identification Tag

**DESCRIPTION:** *Christy's™* Standard ID Tags are ideal for high-visibility point-of-use identification. The top hole has been designed to pass a 16 gauge or smaller solenoid "pigtail" wire, or it can be attached to hose bibbs, valves, or handles with a nylon tie, or to the lid of a valve box with a bolt (not included). The hole can also be drill enlarged. The outlet reinforcement on our marking tags has 180LB. pull out resistance. This provides for an easily installed, virtually vandal-proof, custom identification product.

Through the use of custom designed plates, we can accommodate almost any request. A sampling of our current special legends and logos is listed on the following pages. Additionally, our marking tags are available in a variety of colors, to conform to both locally developed standards, as well as APWA and AWWA national standards. With our standard Alpha-Numeric numbering, the valve or marking designation can be seen from a distance of up to 50 feet.

Our standard yellow tags, (Irrigation Industry Standard) can accommodate up to three 1-1/8" alpha-numeric characters per side. We commonly provide standard sequences ranging from A1 . . . A36 through Z1 . . . Z36. In addition, we can accommodate practically any special alpha-numeric numbering requirement. This allows for logical and consistent zone, controller, valve or area sequence identification.

**For Example:** (A1A, A1B, A1C . . . A1Z) (AAA, AAB, AAC . . . AAZ) (C26, C27. . . C99) (125, 126, 127...)

## SPECIFICATIONS:



**Short Form:** *Christy's™* Standard size Identification Tags are to be provided as designated in the plans, conforming to the noted size, color and legend specifications listed.

**Standard Specification:** Identification Tags provided, will be manufactured from polyurethane Behr Desopan, incorporating an integral attachment neck and reinforced attachment hole and will be capable of withstanding 180LBS. pull out resistance.

The Identification tag shall be approximately 2.25" X 2.75" (*Christy's™* Standard Tag ) in size. All lettering shall be hot-stamped in black and capable of withstanding outdoor usage. The standard alpha-numeric designations shall incorporate alpha-numeric lettering 1-1/8" in height. Special lettering, designations or stampings will be the maximum size available based on the manufacturers judgement and will be hot-stamped as well


The tag color will be \_\_\_\_\_ (Yellow, Purple, Blue, Green, Red or White).

The marking tag will be \_\_\_\_\_ (Single or Double) side stamped with the following designation, message or identification sequence \_\_\_\_\_ (see styles on following pages or design template below) or *Christy's™* style # \_\_\_\_\_. The marking tag shall be manufactured by T. Christy Enterprises, Inc., Anaheim, CA. (800-258-4583).

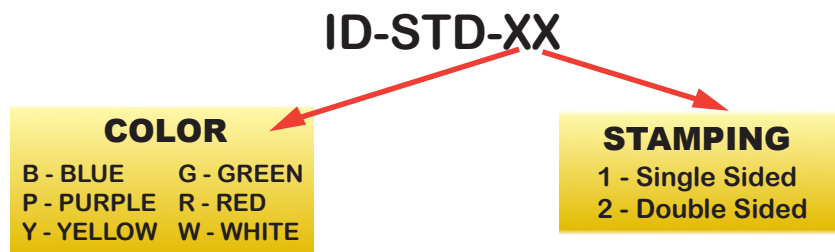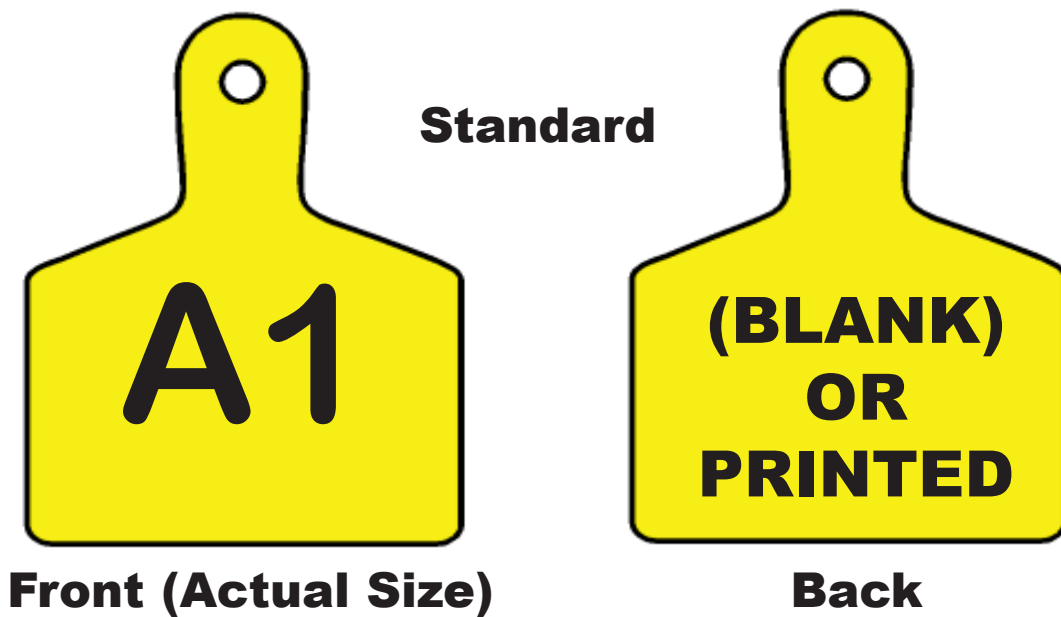

**Our yellow tag (ID-STD-Y1) is a standard in the irrigation industry for valve sequence identification.**

## **DESIGN TEMPLATE**

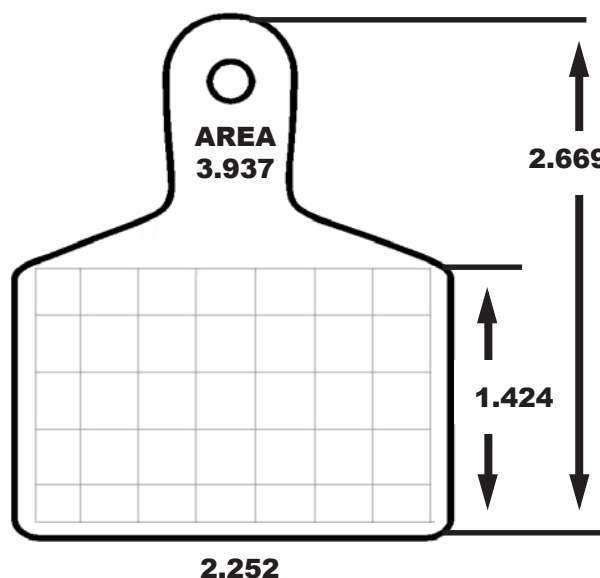

**Our standard size tag will accommodate up to three characters per side for valve identification purposes.**

**STANDARD**