

**VDIV10.1, VDIV2.1 VOLTAGE DIVIDER TERMINAL INPUT MODULES
INSTRUCTION MANUAL**

2/96

COPYRIGHT (c) 1996 CAMPBELL SCIENTIFIC, INC.

WARRANTY AND ASSISTANCE

The **VDIV10.1, VDIV2.1 VOLTAGE DIVIDER TERMINAL INPUT MODULES** are warranted by CAMPBELL SCIENTIFIC, INC. to be free from defects in materials and workmanship under normal use and service for twelve (12) months from date of shipment unless specified otherwise. Batteries have no warranty. CAMPBELL SCIENTIFIC, INC.'s obligation under this warranty is limited to repairing or replacing (at CAMPBELL SCIENTIFIC, INC.'s option) defective products. The customer shall assume all costs of removing, reinstalling, and shipping defective products to CAMPBELL SCIENTIFIC, INC. CAMPBELL SCIENTIFIC, INC. will return such products by surface carrier prepaid. This warranty shall not apply to any CAMPBELL SCIENTIFIC, INC. products which have been subjected to modification, misuse, neglect, accidents of nature, or shipping damage. This warranty is in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for a particular purpose. CAMPBELL SCIENTIFIC, INC. is not liable for special, indirect, incidental, or consequential damages.

Products may not be returned without prior authorization. To obtain a Returned Materials Authorization (RMA), contact CAMPBELL SCIENTIFIC, INC., phone (435) 753-2342. After an applications engineer determines the nature of the problem, an RMA number will be issued. Please write this number clearly on the outside of the shipping container. CAMPBELL SCIENTIFIC's shipping address is:

CAMPBELL SCIENTIFIC, INC.

RMA# _____
815 West 1800 North
Logan, Utah 84321-1784

CAMPBELL SCIENTIFIC, INC. does not accept collect calls.

Non-warranty products returned for repair should be accompanied by a purchase order to cover the repair.



CAMPBELL SCIENTIFIC, INC.

815 W. 1800 N.
Logan, UT 84321-1784
USA
Phone (435) 753-2342
FAX (435) 750-9540
www.campbellsci.com

Campbell Scientific Canada Corp.
11564 -149th Street
Edmonton, Alberta T5M 1W7
CANADA
Phone (403) 454-2505
FAX (403) 454-2655

Campbell Scientific Ltd.
Campbell Park
80 Hathern Road
Shepshed, Leics. LE12 9RP
ENGLAND
Phone (44)-50960-1141
FAX (44)-50960-1091

VDIV10.1, VDIV2.1 VOLTAGE DIVIDER TERMINAL INPUT MODULES

1.0 FUNCTION

Terminal input modules connect directly to the datalogger's input terminals to provide completion resistors for resistive bridge measurements, voltage dividers, and precision current shunts. Voltage dividers are used to divide a voltage to provide a reduced voltage output that is a fraction of the original voltage. The VDIV10.1 is a 10:1 voltage divider, the output voltage is one tenth the input voltage, and allows a voltage up to ± 25 volts to be measured on a ± 2500 mV range (CR10(X)) and up to ± 50 volts to be measured on a ± 5000 mV range (21X, CR7, CR9000). The VDIV2.1 is a 2:1 voltage divider, the output voltage is one half the input voltage, and allows a voltage up to ± 5 volts to be measured on a ± 2500 mV range (CR10(X)) and up to ± 10 volts to be measured on a ± 5000 mV range (21X, CR7, CR9000).

Each voltage divider module may be used to measure one differential voltage or two single-ended voltages.

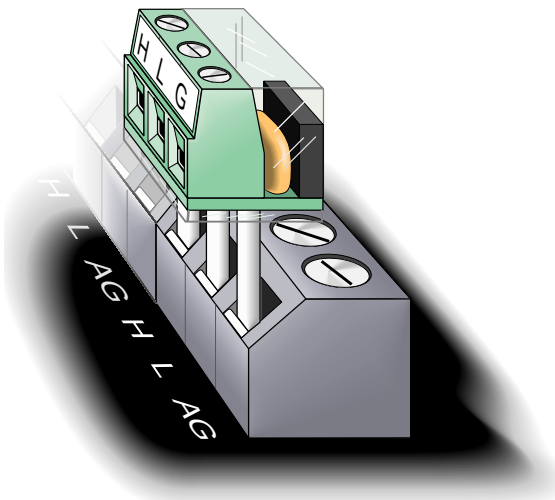


FIGURE 1-1. Terminal Input Module

2.0 SPECIFICATIONS

2.1 VDIV10.1

10:1 Resistive Divider	
Resistors	90 k Ω /10 k Ω
Ratio Tolerance @ 25 °C	$\pm 0.02\%$
Ratio Temperature coefficient	2 ppm/ $^{\circ}$ C
Power rating	0.25 W
Maximum Input Voltage	50 volts

2.2 VDIV2.1

2:1 Resistive Divider	
Resistors	10 k Ω /10 k Ω
Ratio Tolerance @ 25 °C	$\pm 0.02\%$
Ratio Temperature coefficient	2 ppm/ $^{\circ}$ C
Power rating	0.25 W
Maximum Input Voltage	10 volts

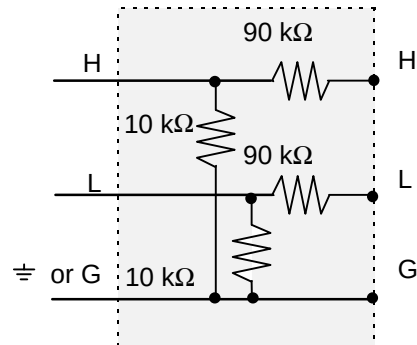


FIGURE 2-1. Voltage Divider Module Schematic

3.0 WIRING

Each voltage divider module may be used to measure one differential voltage (Figure 3-1) or two single-ended voltages (Figure 3-2).

VDIV10.1, VDIV2.1 VOLTAGE DIVIDER TERMINAL INPUT MODULES

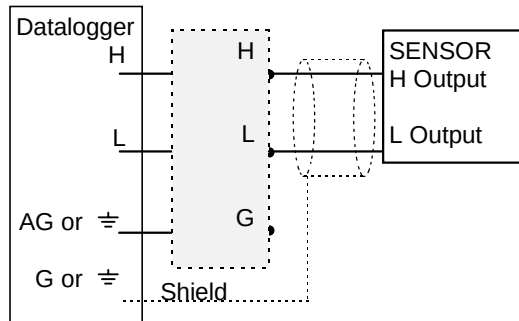


FIGURE 3-1. Wiring for Differential Voltage Measurement

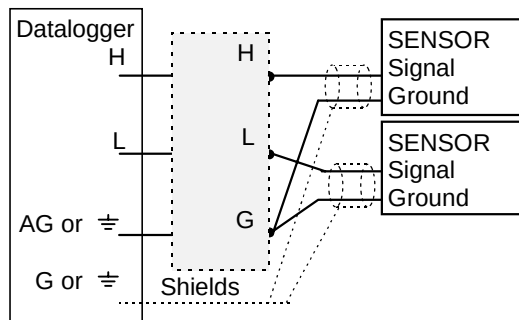


FIGURE 3-2. Wiring for Single-Ended Voltage Measurements

4.0 PROGRAMMING

The output of the voltage divider is measured with the appropriate voltage measurement instruction. A differential input is measured with the differential voltage instruction (P2 with the CR10(X), 21X, or CR7; VoltDiff with the CR9000). A single-ended input is measured with the single-ended voltage instruction (P1 with the CR10(X), 21X, or CR7; VoltSE with the CR9000). Select the smallest input voltage range that will accommodate the maximum expected output. The smallest possible range will provide the best resolution.

4.1 EXAMPLE

For example, suppose we want to measure the voltage of a 12 volt battery system that may actually experience voltages in excess of 14 volts. Using the VDIV10.1 10:1 voltage divider, the 14 volt output will be divided to $14/10 = 1.4$ volts or 1400 mV. Thus the voltage range on which to make the measurement is the ± 2500 mV range on the CR10(X), the ± 5000 mV range on the 21X and CR9000, and the ± 1500 mV range on the CR7.

The multiplier to use with the voltage measurement must take into account the divisor, the calibration of the sensor, and the units desired for the result. In this example, voltage is divided by 10 and read by the datalogger as millivolts (i.e., $(V/10) \times 10^3 = V \times 10^2$). To output directly in volts, we use a multiplier of 0.01.

The following examples show the measurement instruction for each of the different dataloggers to measure the battery voltage described above.

4.2 CR10(X)

```
1: Volt (Diff) (P2)
1: 1      Reps
2: 25     ± 2500 mV 60 Hz Rejection
          Range
3: 1      DIFF Channel
4: 1      Loc [ BattVolt ]
5: 0.01   Mult
6: 0      Offset
```

4.3 21X

```
1: Volt (Diff) (P2)
1: 1      Reps
2: 5      ± 5000 mV Slow Range
3: 1      DIFF Channel
4: 1      Loc [ BattVolt ]
5: 0.01   Mult
6: 0      Offset
```

4.4 CR7

```
1: Volt (Diff) (P2)
1: 1      Reps
2: 7      ± 1500 mV Slow Range
3: 1      In Card
4: 1      DIFF Channel
5: 1      Loc [ BattVolt ]
6: 0.01   Mult
7: 0      Offset
```

4.5 CR9000

```
VoltDiff(BattVolt, 1, mV5000, 5, 1, 1, 0, 0, 0.01, 0)
```