

Bubbler Heads

Adjustable Full-Circle Bubbler 1300A-F

Designed for tree, shrub and flower areas.

Operating Range

- Flow: 1.0 to 2.3 gpm (0,23 to 0,52 m³/h; 0,06 to 0,14 l/s)
- Spacing: 1 to 3 feet (0,3 to 0,9 m)
- Pressure: 10 to 60 psi (0,7 to 4,0 bar)

Dimensions

- ½ inch (15/21) female threaded inlet
- Height: 1 inch (2,5 cm)
- Top diameter: 1 inch (2,5 cm)



Pressure Compensating Full-Circle Bubblers

1400 Series

Designed for irrigating tree, shrub and flower areas where pressure compensation is required.

Operating Range

- Flow: 0.25 to 2.0 gpm (0,06 to 0,46 m³/h; 0,02 to 0,13 l/s)
- Spacing: 1 to 3 feet (0,3 to 0,9 m)
- Pressure: 20 to 90 psi (1,5 to 6,0 bar)

Dimensions

- Same as 1300A-F

Models and Specifications

- 1401: 0.25 gpm (0,06 m³/h; 0,02 l/s); full circle, trickle pattern
- 1402: 0.5 gpm (0,11 m³/h; 0,03 l/s); full circle, trickle pattern
- 1404: 1.0 gpm (0,23 m³/h; 0,06 l/s); full circle, umbrella pattern
- 1408: 2.0 gpm (0,46 m³/h; 0,12 l/s); full circle, umbrella pattern

How to Specify/Order

1404

Model

1300A-F
1401
1403
1404
1408



Specifications

1300A-F

Adjustable Flood Bubbler

The bubbler body shall be constructed of durable UV-resistant plastic. It shall have a plastic inlet filter screen to protect the nozzle against clogging, and a stainless steel adjusting screw, capable of shutting off the bubbler and regulating the flow.

The bubbler shall have a 1/2 inch (15,21) female threaded inlet for connecting to the piping system riser.

The bubbler shall be as manufactured by Rain Bird Corporation, Glendora, California.

1401, 1402, 1404, 1408

Pressure Compensating Flood Bubbler


The bubbler shall have a "trickle" pattern (1401 & 1402 models) or an "umbrella" pattern (1406 & 1408 models) discharge.

The bubbler assembly shall have a plastic inlet filter screen to protect the nozzle against clogging.

The pressure compensating bubbler shall be of a permanently assembled design constructed of durable, UV-resistant plastic with an integral rubber flow washer for regulating the flow rate at an operating pressure range of 20 to 90 psi (1,5 to 6,0 bar).

The pressure compensating bubbler shall have a 1/2 inch (15,21) female threaded inlet for connection to the piping system riser.

The pressure compensating bubbler shall be as manufactured by Rain Bird Corporation, Glendora, California.

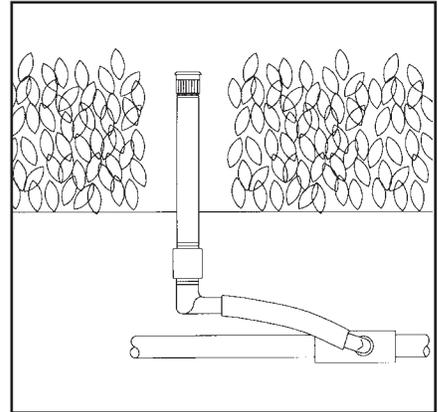

Rain Bird Corporation

6991 E. Southpoint Road, Tucson, AZ, 85706, U.S.A.
Phone: (520) 741-6100 Fax: (520) 741-6522

Rain Bird Corporation

970 W. Sierra Madre Avenue, Azusa, CA, 91702, U.S.A.
Phone: (626) 812-3400 Fax: (626) 812-3411

Rain Bird International, Inc.

P.O. Box 37, Glendora, CA, 91740-0037, U.S.A.
Phone: (626) 963-9311 Fax: (626) 852-7343

Technical Service and Support

(800) RAINBIRD (U.S. and Canada only)

Specification Hotline

(800) 458-3005 (U.S. and Canada only)

www.rainbird.com

The Intelligent Use of Water™ — Visit www.rainbird.com to learn about our efforts