



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO#:	
Rep.:	
Wholesale Dist.:	

### DESCRIPTION

The Apollo International™ 95ALF Lead Free\* Forged Brass Stop and Waste Ball Valve combines reliable operation with maximum economy. Ideal for plumbing or hydronic systems where draining is required. IAPMO listed and ANSI 3rd party certified lead free.

### FEATURES

- Lead Free\* Materials and Certification
- 2 Piece, Full-Port Design
- Blowout-Proof Stem Design
- Adjustable stem packing Nut
- Drain Port With Finger Tight Shut-Off
- Fast, Quarter-Turn Operation

### APPROVALS

- IAPMO IGC 157
- NSF/ANSI 61 Water Quality
- NSF/ANSI 372 Lead Free

### PERFORMANCE RATING

- Maximum Pressure: 600 psi CWP
- Temperature Range: 32°F - 250°F



### STANDARD MATERIALS LIST

<b>BODY</b>	Lead Free Brass DZR
<b>RETAINER</b>	Lead Free Brass DZR
<b>BALL</b>	Lead Free Brass DZR, Chrome Plated
<b>STEM</b>	Lead Free Brass DZR
<b>SEATS</b>	PTFE
<b>STEM PACKING</b>	PTFE
<b>GLAND NUT</b>	Brass
<b>O-RING</b>	EPDM
<b>HANDLE</b>	Plated Steel w/ PVC Grip
<b>WASHER</b>	Plated Steel

**\*\*95ALF-2xx intended for soft solder installation using solders with melting temperature of < 500°F.**

### DIMENSIONS

MODEL NUMBER	SIZE (IN.)	DIMENSIONS (IN.)				
		A	B	C	D	E
<b>THREADED</b>						
95ALF-103-01	1/2	0.59	2.24	1.78	3.74	-
95ALF-104-01	3/4	0.79	2.53	2.09	3.94	-
95ALF-105-01	1	0.98	3.15	2.36	4.33	-
<b>SOLDER</b>						
95ALF-203-01	1/2	0.59	2.12	1.78	3.74	0.63
95ALF-204-01	3/4	0.79	2.87	1.94	3.94	0.88
95ALF-205-01	1	0.98	3.53	2.36	4.33	1.13

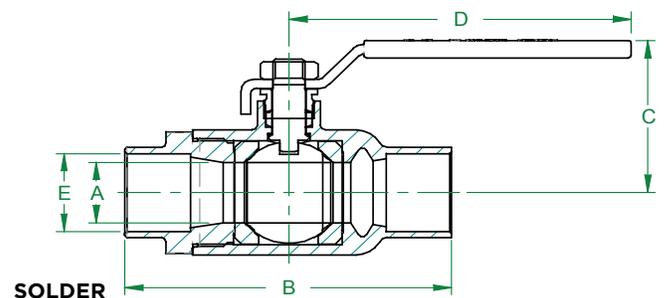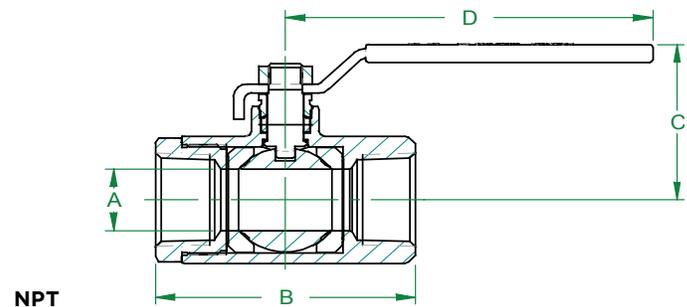

\*LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.