


LG148-7000 Finish(C) ☐

LG148-700K Finish(K) ☐

LG148-700Y Finish(Y) ☐



- Lever Handles
- 3-Hole Installation
- Pforever Seal
- High-Arc Decorative Spout

Specifications

Features

- 1.2 GPM Flow Rate
- All Metal Construction
- Includes Metal Supply Nuts
- 3-Hole Installation
- Metal Pop-Up
- High-Arc Decorative Spout
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- EPA Watersense Certification 1.2 gpm, 4.5L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

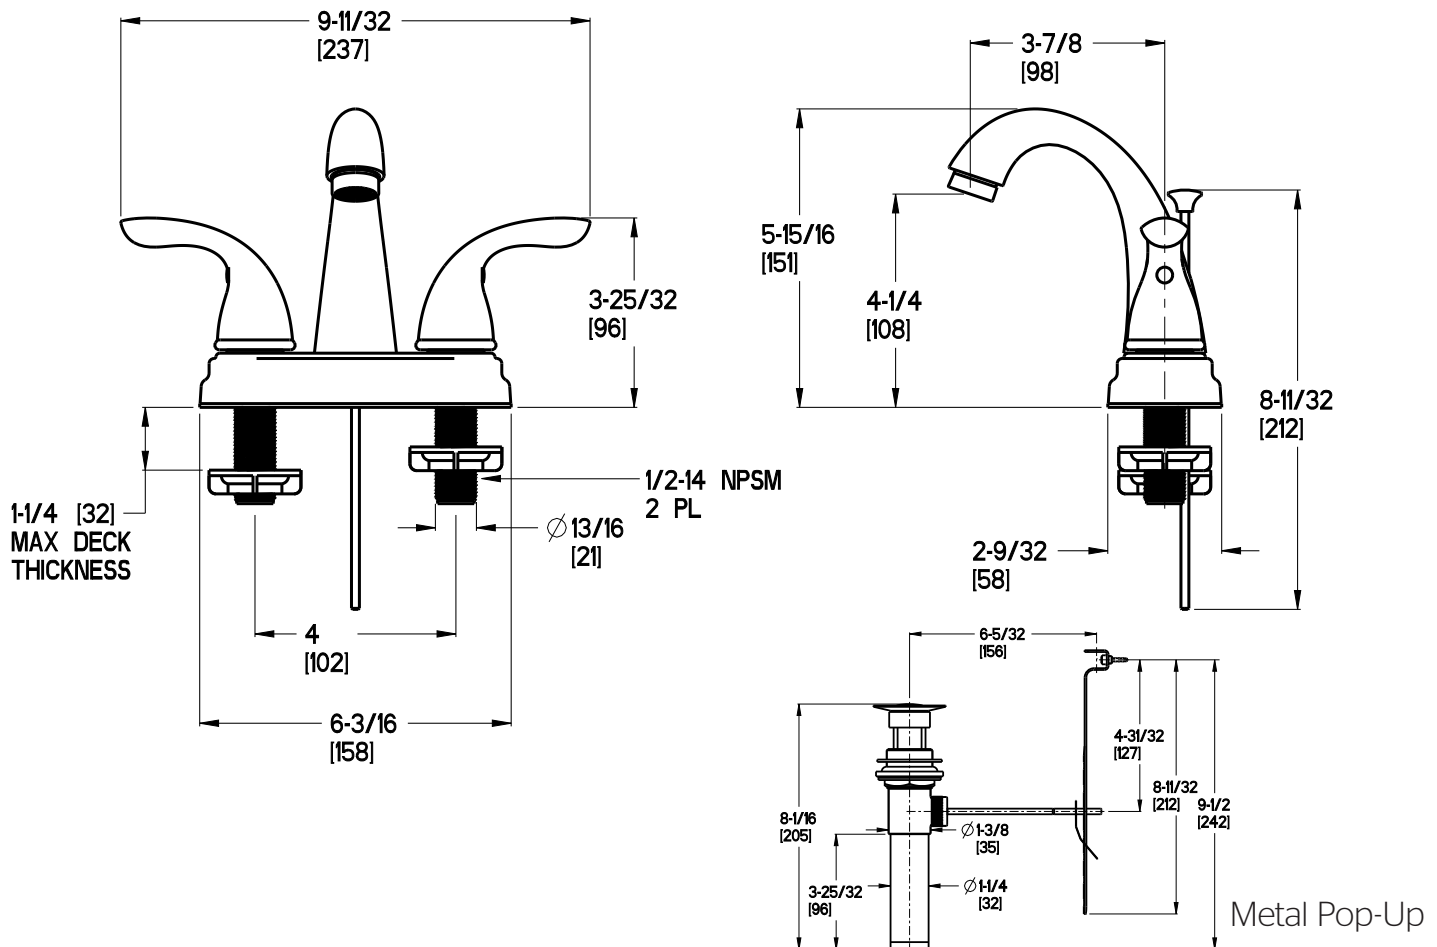

$\phi 1$ Min to $\phi 1\frac{1}{2}$ Max. Deck Hole Openings