

Model S0000-AL2

Electric Alarm with Flashing Light and Horn



SPECIFICATIONS:

Model S0000-AL2 is an electric alarm with a flashing amber light and horn. System is activated by a single pole flow switch once the shower or eyewash is activated.

STANDARD EQUIPMENT:

Alarm: Hermetically sealed alarm that provides a distinctive audible signal with a volume preset at 90 db at 10 feet (adjustment screw on the horn permits changes to the sound level). Weatherproof flashing amber light is provided.

Flow Switch: 1-1/4" NPT single pole, double throw flow switch requires 5 amp, 125 volt electrical supply.

Mounting: The unit is provided with a bracket for mounting the alarm and light on the vertical pipe or wall, junction box and waterproof flexible conduit.

☐ Model: S0000-AL2



OPTIONAL ACCESSORIES:

Additional costs may be incurred

- ☐ - C1D1 Class 1, Division 1
- ☐ - C1D2 Class 1, Division 2
- ☐ - DB1 Double pole, for connection to a remote monitoring system
- ☐ - 240V 240 volt, 50 hertz

Acorn Safety assumes no responsibility for use of void or suspended data. © Copyright 2007 Acorn Safety, City of Industry, CA. A Division of Acorn Engineering Company. Please visit www.acornsafety.com for most current specifications.

Submittal # **S0000-AL2**
[Cat. 07/ACC] 11/1/07

Product complies to the following standards:

Test rating conditions are compliant to ANSI Z358.1-2004




ACORN SAFETY
15125 Proctor Avenue
City of Industry, CA
91746 U.S.A.
Phone 800-591-9372
626-855-4804
Fax 626-937-4213
www.acornsafety.com

TECHNICAL DIMENSIONS

All dimensions are nominal and subject to manufacturer's change without notice. Acorn Safety assumes no responsibility for use of void or suspended data. Dimensions may change with the addition of optional accessories. © 2008 Acorn Safety, a Division of Acorn Engineering Company. Please visit www.acornsafety.com for most current specifications.

□ Model S0000-AL2 : Electric Alarm with Flashing Light and Horn

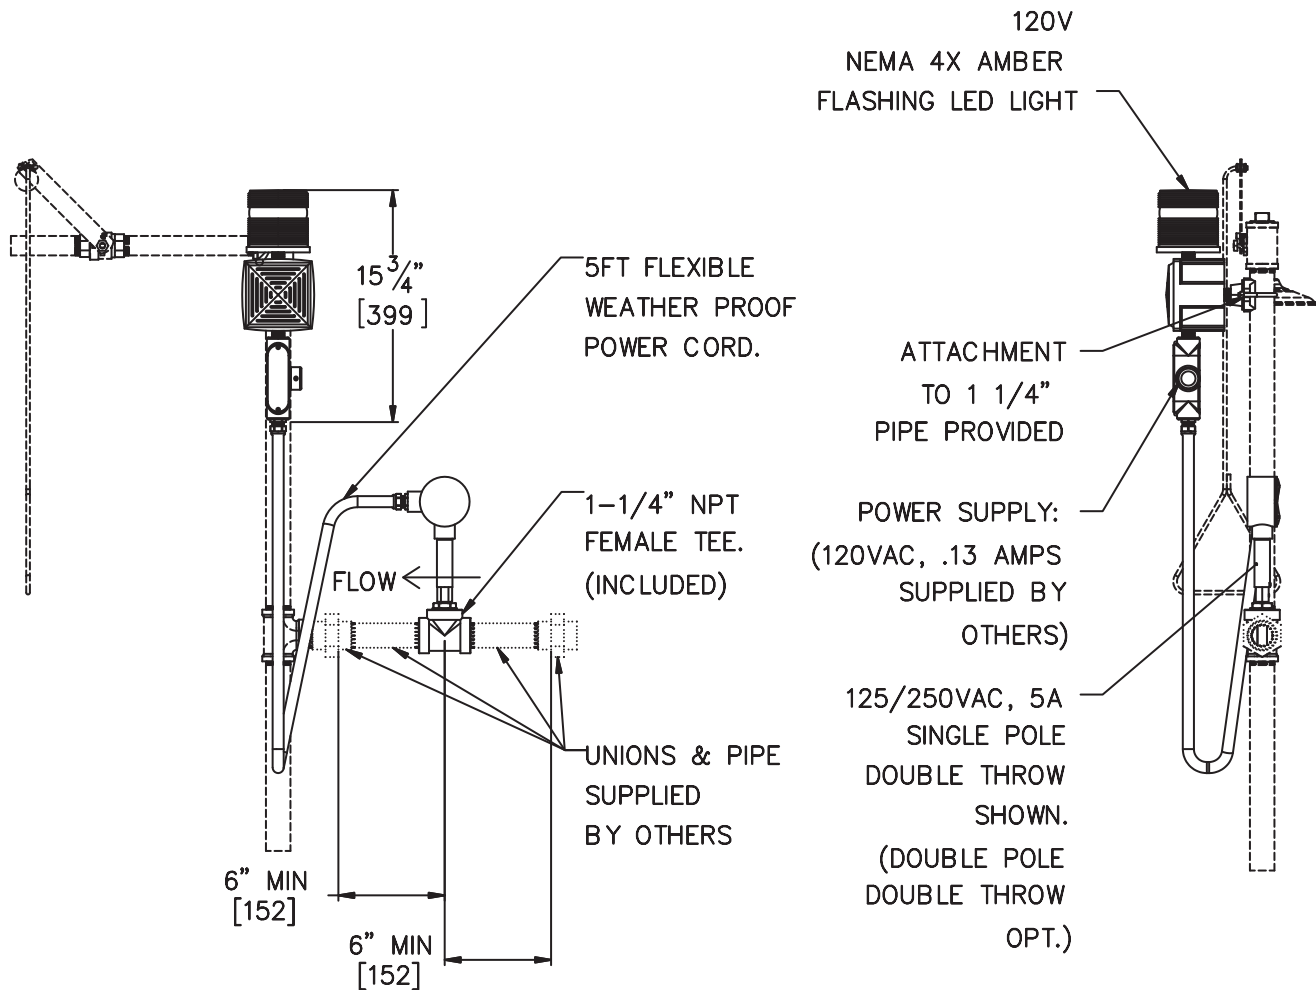

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
2. FLOW SWITCH SHALL BE INSTALLED IN A MANNER TO ALLOW IT TO BE VERTICAL AND FLOW IS HORIZONTAL.
3. DIRECTION OF WATER FLOW MUST BE IN SAME DIRECTION AS SHOWN ON FLOW SWITCH.
4. HORN MAY BE ADJUSTED FROM 73dB TO 103dB AT 10 FEET.

Rough-in # **S0000-AL2** Rev. A 11/20/08

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options	Quantity
Company	Date
Contact	Title
Approval for Manufacturing/Signature	



Phone 800-591-9372 or 626-855-4804
www.acornsafety.com