Model S0440-AS

Wall Mounted Eye/Face Wash, less Steel All St

SPECIFICATIONS:

Model S0440-AS is a wall mounted eye/face wash, with a stainless steel bowl, ABS plastic eye/face wash spray heads, an inline strainer and a stainless steel stay-open 1/2" ball valve with a push handle.



Spray Head Assembly: ABS yellow plastic eye/face wash heads with integral flip dust covers, internal flow controls and filters to remove debris from the water. An anti-microbial agent is molded into the ABS material, providing integrated protection.

Valve: 1/2" NPT stainless steel stayopen ball valve with a stainless steel push handle and a 50 mesh inline strainer

Water Supply: 1/2" NPT female threaded, stainless steel inlet.

Waste: Chrome plated brass, 1-1/4" OD tailpiece.

Bowl: Stainless steel, 11-3/4" diameter bowl.

Mounting: 11 gage stainless steel wall bracket.

Universal Sign: ANSI compliant. vertical identification sign.

Weekly Test Tag: A water proof test card to record the date and inspector's name for weekly functional testing of the unit.





OPTIONAL ACCESSORIES:

Additi I costs may be incurred

□ - BF Barrier free, handicap accessible □ - CS1 Stainless Steel "clam shell" cover

□ - FLW2 Flow switch, single pole 🔲 - FPV Freeze protection valve

🔲 - LWB Less wall bracket

□ - MS1 MAP (magnetically actuated proximity) switch,

for one (1) actuator

□ - PT1 P-trap, chrome plated brass with 1-1/4" OD waste outlet

☐ - SDC Stainless steel dust covers ☐ - SPV Scald protection valve

□ - TMV8 Thermostatic mixing valve is ASSE Listed per the ASSE 1071 standard. The tepid output water complies

with ANSI Z358.1 standard.

□ "1" Auxiliary hand-held drench hose with a self-closing valve

(Use model S0441-AS)






Acorn Safety assumes no responsibility for use of void or suspended data. © Copyright 2010 Acorn Safety, City of Industry, CA, A Division of Acorn Engineering Company. Please visit w acornsafety.com for most current specifications.

Submittal # S0440-AS [EW] Rev. B 9/1/10

Product carries the following certifications:








ACORN SAFETY 15125 Proctor Avenue City of Industry, CA 91746 U.S.A. Phone 800-591-9372 626-855-4804 Fax 626-937-4213 www.acornsafety.com

TECHNICAL DIMENSIONS

All dimensions are nominal and subject to manufacturer's change without notice. Acorn Safety assumes no responsibility for use of void or suspended data. Dimensions may change with the addition of optional accessories. © 2008 Acorn Safety, a Division of Acorn Engineering Company. Please visit w acornsafety.com for most current specifications.

☐ Model S0440-AS: Wall Mounted Eye/Face Wash, All Stainless Steel

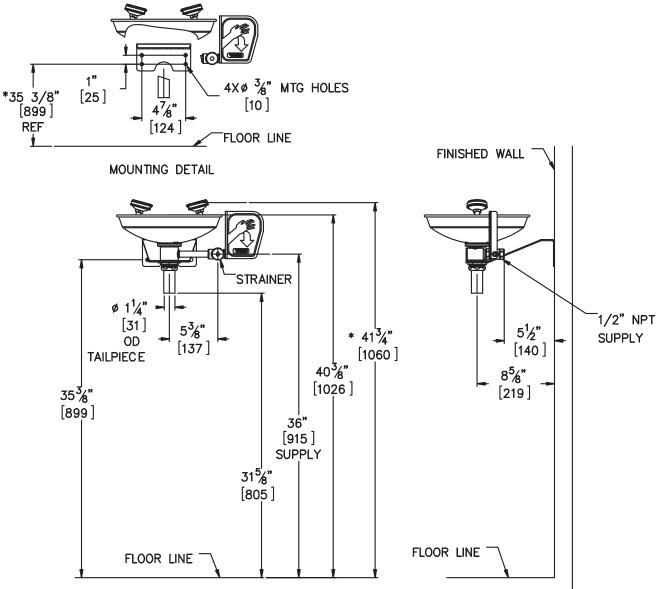

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR NOMINAL ADULT HEIGHT. ANSI Z358.1 REQUIRES NOZZLES TO BE BETWEEN 33" [838] AND 45" [1143] ABOVE THE FLOOR.
- 3. P-TRAP NOT PROVIDED.

Rough-in # **S0440-AS** Rev. A 11/20/08

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.

UMMARY L FOR URING	Model Number & Options		Quantity	ACORO
SAL TUE	Company			
ECTION SI APPROVA ANUFACT	Contact	Title	_	800-591-9372
SELECT & API MANI	Signature (Approval f	Date _		or 626-855-4804 www.acornsafety.com