


Project:	
Type:	

## Model: UL100 (Under Water Light)

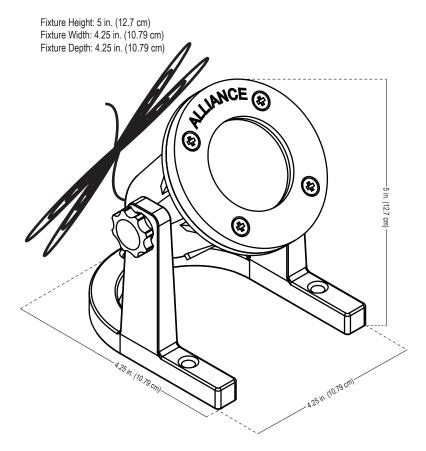

## Specifications and Features:

Body: Brass fixture, aged brass finish

**Base:** Solid brass fixture base with swivel mount for adjusting the direction of the light beam **Face plate:** Solid brass shroud with water tight, sealed clear lens, fixes to base with four stainless steel screws

Socket: Spring loaded ceramic bi-pin socket with dual contact and lamp clips

Wire: 25' Foot underwater wire lead, Pre-connected to the fixture

Warranty: Lifetime warranty on fixture housing

## Lamp Options

Model #	Base Type	Angle	Wattage	Lumen Output
LMR16-LED-4W-NS	MR16	15°	4w	250lm
LMR16-LED-4W-F	MR16	45°	4w	250lm
LMR16-LED-4W-WF	MR16	60°	4w	250lm
LMR16-LED-5W-NS	MR16	15°	5w	310lm
LMR16-LED-5W-F	MR16	45°	5w	310lm
LMR16-LED-5W-WF	MR16	60°	5w	310lm
LMR16-35-36-XH (Halogen)	MR16	45°	35w	310lm

LED Ordering Guide: Model-Lamp Wattage-Lamp Angle

Example: UL100-LED-5W-F

Notes:



Project: Type:

## **MR16 LED Photometric Comparisons**

LMR16-LED-5W-NS






9'10"


LMR16-LED-5W-F





LMR16-LED-5W-WF





LMR16-LED-4W-NS

13'1"

9'10"

LMR16-LED-4W-F

LMR16-LED-4W-WF

