

# UltraFlex<sup>®</sup> Hose



## STANDARD SPECIFICATIONS

• 1/2" -14 NPSM brass-plated connection points


- Available in various lengths
  - 40 in. (1016 mm)
  - 60 in. (1524 mm)
  - 70 in. (1778 mm)
  - 84 in. (2134 mm)
- Two conical nuts
- Reinforced construction
  - Nylon Polyester with PVC
  - Crystal PVC outer sheath
  - Elastic PVC inner liner
- Available in view packaging

#### WARRANTY

• Limited Lifetime Warranty (see below)

### **COMPLIES WITH**

• ASME A112.18.1/CSA B125.1

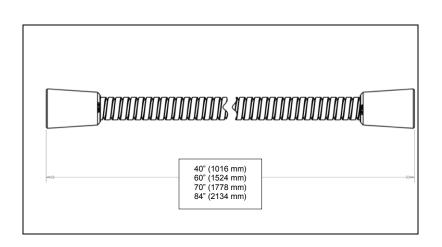

Finishes Available	Model Number
Black and Chrome	490 C 84 PK
Black and Chrome	490 C 70 PK
Black and Chrome	490 C 60 PK
Black and Chrome	490 C 40 PK
Black and Polished Brass	490 2070 PK

#### **Limited Lifetime Warranty**

Alsons Corporation warrants to the owner of this product that the product is free from defects in material or workmanship. We will repair or replace, at our discretion, at no charge. This warranty gives you specific legal rights. You may also have other rights that vary where you reside. If this product malfunctions or becomes damaged, stop use and return it to Alsons for examination and/or repair.

Alsons reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

For assistance or problems with installation in the USA, call toll-free 1-800-421-000,1 8:00 a.m.-6:00 p.m. Eastern Standard Time, Monday-Friday. Outside the USA, write to: Alsons Corporation, 3010 West Mechanic Street, Hillsdale, MI 49242