


JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1 1/2 x 1 1/2 x 7 Series 60®

Maintenance Free In-Line Mounted Pump

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☐ BRONZE FITTED ☐ ALL BRONZE

FEATURES

- ☒ MAINTENANCE FREE PUMP
- ☒ INTERNALLY SELF-FLUSHING MECHANICAL SEAL
- ☒ XLII® LUBRICATION SYSTEM
- ☒ THREE YEAR WARRANTY
- ☒ FACTORY TEST

MAXIMUM WORKING PRESSURE

- ☒ 175 psi (12 bar) W.P.

TYPE OF SEAL


☐ BUNA/CARBON-CERAMIC (STANDARD)
 (-20 °F TO 225 °F)


TYPE OF SEAL

☐ EPT/TUNGSTEN-CARBIDE
 (-20 °F TO 250 °F)

TYPE OF SEAL

☐ VITON/CARBON-CERAMIC
 (0 °F TO 225 °F)

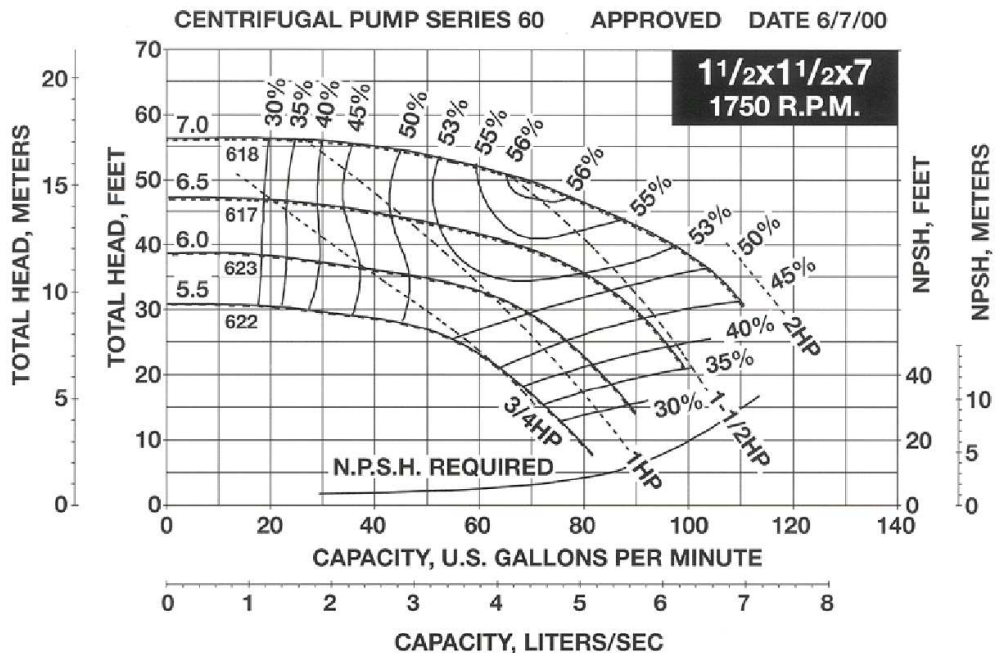

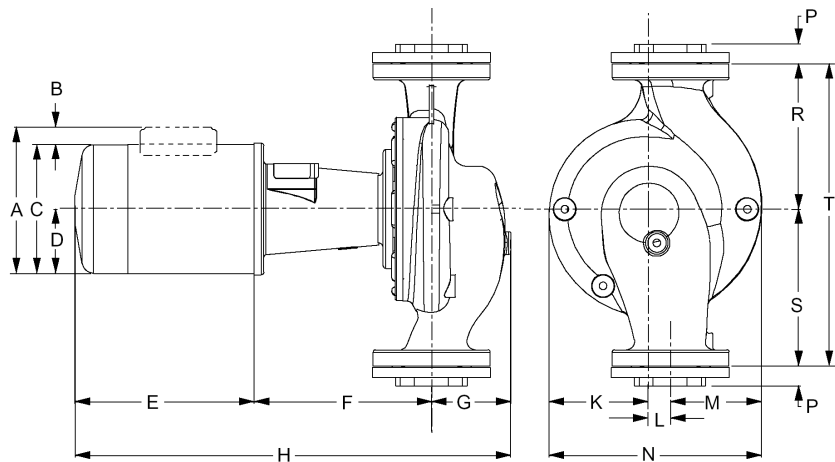

SUCTION AND DISCHARGE SIZE INCHES NPT	PUMP DIMENSIONS IN INCHES (MM)									
	F	G	K	L	M	N	P	R	S	T
1-1/2	9-3/8 (238)	3-1/4 (83)	4-5/8 (117)	1 (25)	3-7/8 (98)	9-1/2 (241)	3/4 (19)	6-1/2 (165)	7 (178)	13-1/2 (343)

MAXIMUM WORKING PRESSURE 175PSI (12 BAR)

ALL MOTORS 1750 RPM

DIMENSIONS – Inches (mm)		MOTOR DIMENSIONS - INCHES (MM)					
MOTOR HP		MOTOR DIMENSIONS - INCHES (MM)					
HP	PHASE	A	B	C	D	E	H
3/4	1	10-1/8 (257)	2-1/4 (57)	7-7/8 (200)	4-3/8 (111)	11 (279)	23-5/8 (600)
3/4	3	7-7/8 (200)	–	7-7/8 (200)	4-3/8 (111)	11 (279)	23-5/8 (600)
1	1	10-1/8 (257)	2-1/4 (57)	7-7/8 (200)	4-3/4 (121)	11 (279)	23-5/8 (600)
1	3	7-7/8 (200)	–	7-7/8 (200)	4-3/4 (121)	11 (279)	23-5/8 (600)
1-1/2	1	8-3/4 (222)	2-1/4 (57)	6-1/2 (165)	3-1/4 (83)	10-3/4 (273)	21-5/8 (549)
1-1/2	3	6-1/2 (165)	–	6-1/2 (165)	3-1/4 (83)	10-3/4 (273)	21-5/8 (549)
2	3	6-1/2 (165)	–	6-1/2 (165)	3-1/4 (83)	10-3/4 (273)	21-3/8 (543)

Dimensions are subject to change. Not to be used for construction purposes unless certified.
Includes Companion Flanges.

