



Electrically Controlled Deluge Valve

400E Type 2

Direct-Diaphragm, Internationally Patented



Typical Applications



- Petrochemical facilities



- Tunnels



- Power plants & Transformers



- Flammable materials storage



- Aviation & Airports



- Marine environments

Features and Benefits

- **Simple design** – cost effective
- **Obstacle-free Full-bore** – uncompromising reliability
- **Factory Pre-assembled trim** – Out-of-Box Quality
- **Automatic reset** – "hands free" return to stand-by
- **Venturi action accelerator** – quicker opening response
- **In-line, quick cover removal** – minimal down-time

Pressure Control

- **Pressure-Reducing Function** additional feature option: constant, regulated, lower outlet pressure, UL-Listed

Optional Features

- **Latched open** – manual reset to close, (option code: H)
- **Explosion proof** for hazardous locations (code: 7)
- **Alarm pressure-switch** (code: P)
- **Automatic Cycle Feature**, shuts off and resets when de-energized (requires on/off detection system)
- **Hydraulic release** trim extension
- **Fail-safe open** energized to close main valve
- **Water Motor Alarm** (code: W)





400E Type 2

Electrically Controlled Deluge Valve



Operation

The BERMAD Model 400E Type 2 is suited for a system including a piping system with a wide variety of open nozzles and a fire detection system and can be used as a remote-control shut-off.

The Type 2 is held closed by pressure applied to the control chamber of the main valve ①. The closed valve prevents the water or water-foam from entering the system until the pressure is released from the control chamber. In the SET condition, the water pressure, supplied through the priming line ②, is trapped in the main valve's control chamber by a check valve ③ and a closed solenoid pilot valve ④. The trapped pressure holds the diaphragm-plug of the main valve to the valve seat ⑤. Sealing is drip-tight and the system piping is dry.

In a FIRE or TEST condition, an electric detection system, through a control panel, trips the Type 2 deluge valve. The deluge valve releases water from the control chamber, either by the opened solenoid pilot valve or by the manual release assembly ⑥. Water exits the accelerator ⑦ faster than it can be supplied to the control chamber, allowing the main valve to open and water to flow into the system piping and to the alarm device.

For installation and maintenance, see BERMAD publication "400E Type 2, IOM".

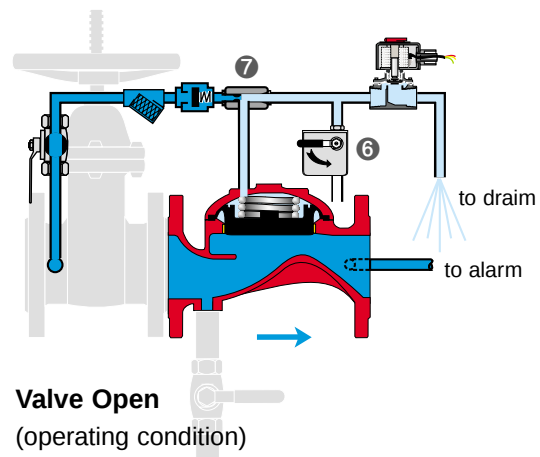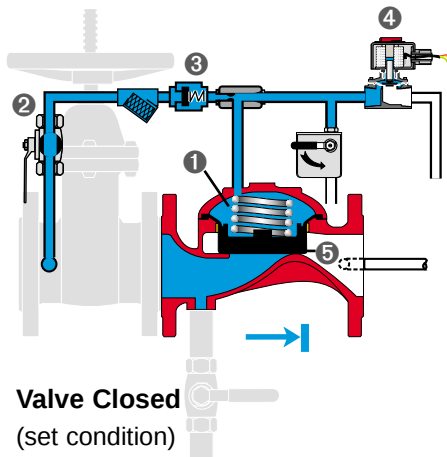

Tender Specifications

The deluge valve shall be a UL-listed, direct-diaphragm actuated, globe pattern valve, with automatic reset. The main valve body shall be manufactured from a single non-fabricated material.

Valve actuation shall be accomplished by a vulcanized, one piece, balanced direct-diaphragm, with metal insert. The diaphragm assembly shall be peripherally guided. The diaphragm assembly shall be the only moving part and shall form a sealed chamber in the upper portion of the valve, separating operating pressure from line pressure.

The valve cover shall be removable for in-line service, enabling all necessary inspection and servicing.

The valve shall have an unobstructed flow path, with no stem-guide or supporting ribs.

The control trim shall be factory pre-assembled and integrated to the main valve, hydraulically-tested, UL-listed and supplied as an assembly consisting of:

- "Y" strainer
- " 2-way solenoid pilot valve
- Venturi action accelerator
- Manual emergency release assembly with stainless steel bracket
- Spring-loaded check valve
- Non-corrosive trim of uniform metal, neither steel nor galvanized piping is permitted

The manufacturer shall be certified according to ISO 9001 standards.



Electrically Controlled Deluge Valve

400E Type 2

System Components *

1 - Main Valve, BERMAD 400E Series

Basic Trim, includes "B" Items as listed⁽¹⁾

2B - Accelerator & Priming Restriction

4B - Priming Strainer

7B - Check Valve

14B - Solenoid Valve

15B - Manual Emergency Release

18B - Priming Ball Valve

19B - Drip Check

Additional Accessories – "A" Items⁽²⁾

1A - Alarm Test Valve

2A - Gauge Valve

3A - Pressure Gauge

5A - Drain Valve


11A - Alarm Valve

14A - Check Valve

Optional

W - Water Motor Alarm

P - Pressure Switch

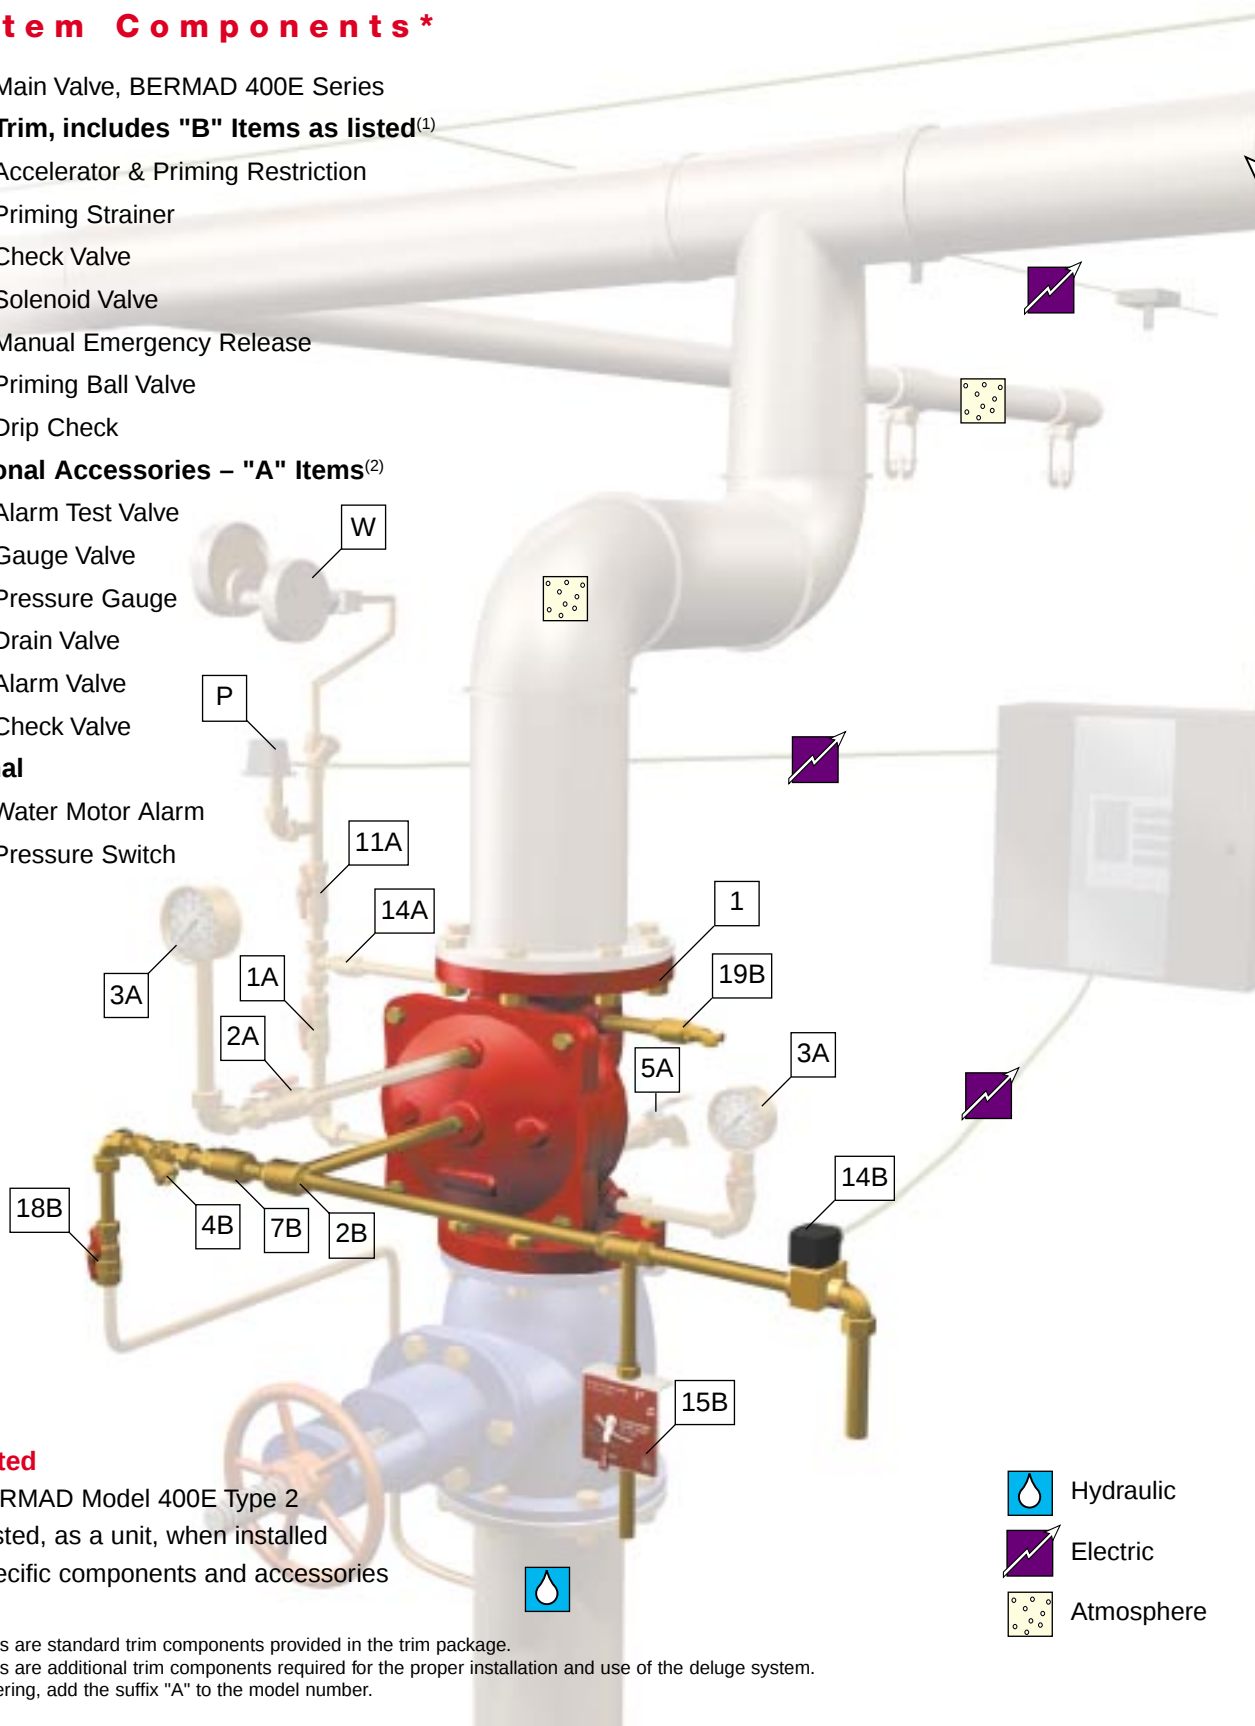


UL-Listed

The BERMAD Model 400E Type 2 is UL-listed, as a unit, when installed with specific components and accessories

* Notes:

1. "B" items are standard trim components provided in the trim package.

2. "A" items are additional trim components required for the proper installation and use of the deluge system.
For ordering, add the suffix "A" to the model number.






400E Type 2

Electrically Controlled Deluge Valve

Specifications

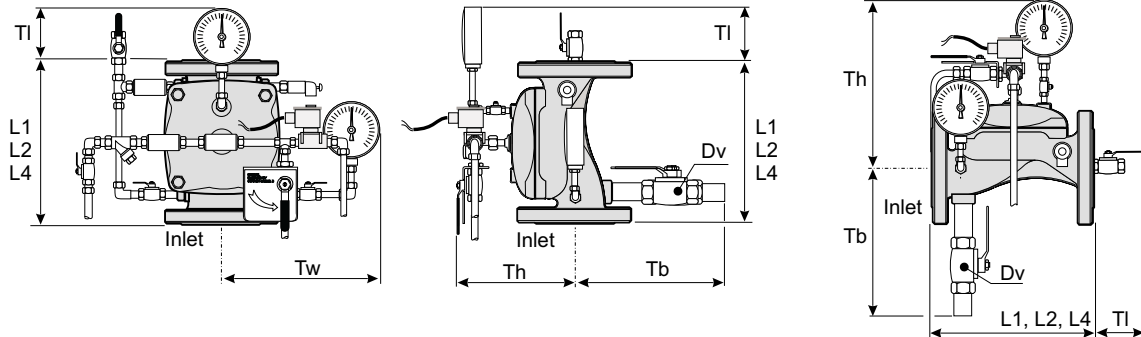

Valve Size		2"		2½"		3"		4"		6"		8"		10"	
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
Dimensions	(1)L1	205	8 ¹ / ₁₆	205	8 ¹ / ₁₆	250	9 ¹³ / ₁₆	320	12 ⁵ / ₈	415	16 ⁵ / ₁₆	500	19 ¹ / ₁₆	605	23 ¹³ / ₁₆
	(2)L2	180	7 ¹ / ₁₆	210	8 ³ / ₄	255	10 ¹ / ₁₆	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	(3)L4	205	8 ¹ / ₁₆	N/A	N/A	250	9 ¹³ / ₁₆	320	12 ⁵ / ₈	N/A	N/A	N/A	N/A	N/A	N/A
	TI	200	7 ⁷ / ₈	200	7 ⁷ / ₈	170	6 ³ / ₄	165	6 ¹ / ₂	160	6 ⁵ / ₁₆	140	5 ¹ / ₂	130	5 ¹ / ₈
	Tw	317 ¹ / ₂	12 ¹ / ₂	329	12 ⁵ / ₁₆	340	13 ³ / ₈	351 ¹ / ₂	13 ³ / ₁₆	393	15 ¹ / ₂	422 ¹ / ₂	16 ⁵ / ₈	442 ¹ / ₂	17 ⁷ / ₁₆
	Th	232	9 ¹ / ₈	244	9 ⁵ / ₈	265	10 ³ / ₈	285	11 ¹ / ₄	360	14 ³ / ₁₆	415	16 ⁵ / ₁₆	413	16 ¹ / ₄
	Tb	258	10 ³ / ₁₆	269	10 ⁹ / ₁₆	280	11	292	11 ¹ / ₂	320	12 ⁵ / ₈	350	13 ³ / ₄	382	15 ¹ / ₁₆
	Dv	¾"		1½"		1½"		2"		2"		2"		2"	

Notes:

1. L1 is for flanged ANSI #150 and ISO PN16.
2. L2 is for threaded female, NPT or BSP.
3. L4 is for grooved.

4. Provide adequate space around valve for maintenance.

5. Tw is the max trim width.

6. Data is for envelope dimensions, specific component positioning may vary.

Connection Standard

- Flanged: ANSI B16.42 (Ductile Iron), B16.5 (Steel & Stainless), B16.24 (Bronze) or ISO PN16
- Threaded: NPT or BSP for 2, 2½ & 3"
- Grooved: ANSI/AWWA C606 for 2, 3, 4 & 6"

Water Temperature

- 0.5 – 50°C (33 – 122°F)

Available Sizes

- 2, 2½, 3, 4, 6, 8, 10 & 12"
- UL-listed for sizes 2, 2½, 3, 4, 6, & 8"

Working Pressure

- Max working pressure: 235 psi (16 bar)
- UL-rated working pressure: 175 psi (12 bar)

Manufacturers Standard Materials

Main valve body and cover

- Ductile iron ASTM A-536

Main valve internals

- Stainless steel 304 & Cast iron

Control Trim System

- Brass control Components/Accessories
- Forged brass fittings & copper tubing

Elastomers

- Nylon fabric reinforced polyisoprene

Coating

- Electrostatic Power Coating Poleyester
- Red (RAL 3000)

Optional Materials

Main valve body

- Carbon steel ASTM A-216 WCB
- Stainless steel 316
- Ni-Al bronze
- Marine bronze

Control Trim

- Stainless steel 316
- Monel®
- Hastalloy C-276

Coating

- High Built Epoxy Fusion-Bonded with UV Protection (for Corrosive Materials)

Optional elastomers

- NBR
- EPDM

Solenoid Pilot Valve

Standard

- 2-way brass body
- N.C (main valve closed when de-energized)
- Enclosure: General purpose watertight, NEMA 4 and 4X / IP65
- Optional: Explosion-proof NEMA 6, 6P, 7 & 9

Voltage

- 24, 120, DC
- 24, 110, 220, AC 50 Hz (or 24, 120, 240, AC 60 Hz)
- Continuous duty-molded Class F
- Wattage rating: 10.6 DC, 9.5 AC

Approvals

- UL-Listed, CSA Certified
- Alternative: CENELEC / IEC certified
- Other solenoids available on request