

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

P1-**A/ P3-**A PEX Faucet Riser - One-Piece with Compression Sleeve or Insert

Use: For use in potable water distribution systems in accessible locations only.

* Plastic tubing requires a plastic insert or sleeve (see 60PT & 63PT submittal forms for details).

Design Features:

- **One-piece construction**
- **Cut-to-Length** for clean, professional installation
- **100% Compliant** to California and Vermont "low-lead" requirements

Operating Specifications:

Temperature Maximum 160 psi at 73°F,
& Pressure: Maximum 100 psi at 180°F




Tubing Diameter: 0.375" O.D. or 0.50" O.D.

MATERIAL SPECIFICATIONS

Tube	Cross-linked Polyethylene (PEX)
Compression Sleeve (3/8"OD)	POM
Compression Insert (1/2"OD)	Stainless steel

Part Listing:


☐	P1-12A	3/8" OD tube x 11-1/2" length
☐	P1-12A F	3/8" OD tube x 11-1/2" length, flag label
☐	P1-15A	3/8" OD tube x 14-1/2" length
☐	P1-20A	3/8" OD tube x 19-1/2" length
☐	P1-20A F	3/8" OD tube x 19-1/2" length, flag label
☐	P1-30A	3/8" OD tube x 29-1/2" length
☐	P1-30A F	3/8" OD tube x 29-1/2" length, flag label
☐	P1-36A	3/8" OD tube x 35-1/2" length
☐	P1-36A F	3/8" OD tube x 35-1/2" length, flag label
☐	P3-12A	1/2" OD tube x 11-1/2" length
☐	P3-15A	1/2" OD tube x 14-1/2" length
☐	P3-20A	1/2" OD tube x 19-1/2" length
☐	P3-20A F	1/2" OD tube x 19-1/2" length, flag label

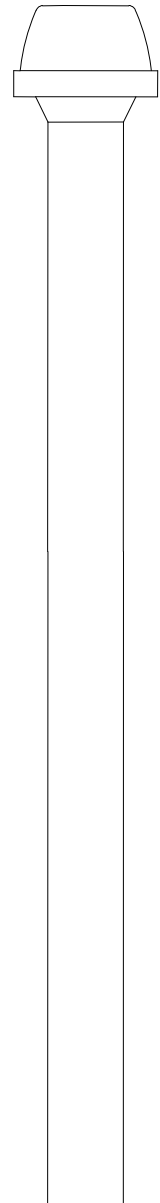

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®

P1-**A/ P3-**A PEX Faucet Riser - One-Piece with Compression Sleeve or Insert

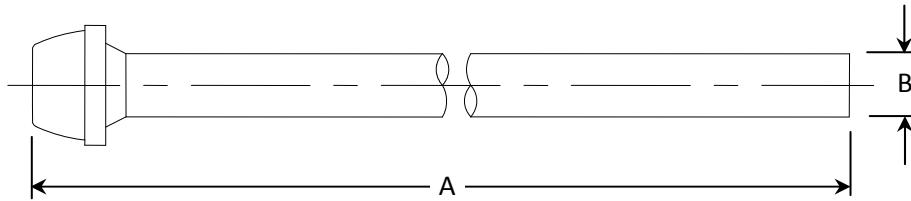

PART DIMENSIONS (Inches)		
Model	DIM. A	DIA. B
P1-12A	11.50	3/8
P1-15A	14.50	3/8
P1-20A	19.50	3/8
P1-30A	29.50	3/8

PART DIMENSIONS (Inches)		
Model	DIM. A	DIA. B
P1-36A	35.50	3/8
P3-12A	11.50	1/2
P3-15A	14.50	1/2
P3-20A	19.50	1/2

Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)
- UL listed to ANSI/NSF 61 Sec. 9 (File # MH25826)
- CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft