

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

B1-**DL/ B2-**DL/ B3-**DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **Superior corrosion resistance** to harsh chemicals found in common household cleaning and plumbing repair products
- **More flexible than stainless steel**, the braided polymer-coated fibers bend freely without kinking or crimping
- **Tough inner core** is reinforced to resist chlorine and chloramine leaching and deterioration
- **Nitrile rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for realible nut-to-hose connections

Operating Specifications:

Temperature: 40°- 140° F, intermittent to 180° F
Pressure: 125 psi maximum


Tubing Diameter: 0.300" I.D. (0.550" O.D.)

MATERIAL SPECIFICATIONS

Inner Hose	Reinforced PVC
Braiding	PVC coated polyester yarn
Barb	Compliant brass
Ferrule	C37000 brass
Nut	C36000 brass
Washer	Nitrile rubber
Compression Ring & Nut	C36000 brass

Part Listing:

- | | | |
|--------------------------|------------|---|
| <input type="checkbox"/> | B1-6DL F | 3/8" Compression x 7/8" Ballcock x 6" Length |
| <input type="checkbox"/> | B1-9DL F | 3/8" Compression x 7/8" Ballcock x 9" Length |
| <input type="checkbox"/> | B1-12DL F | 3/8" Compression x 7/8" Ballcock x 12" length |
| <input type="checkbox"/> | B1-12DLM F | 3/8" Compression x 7/8" Ballcock (metal nut) x 12" length |
| <input type="checkbox"/> | B1-12DLU D | Universal Connector - 3/8" Compression x 7/8" Ballcock x 12" length with 7/16" & 1/2" slip-joint & 1/2" F.I.P. adapters |

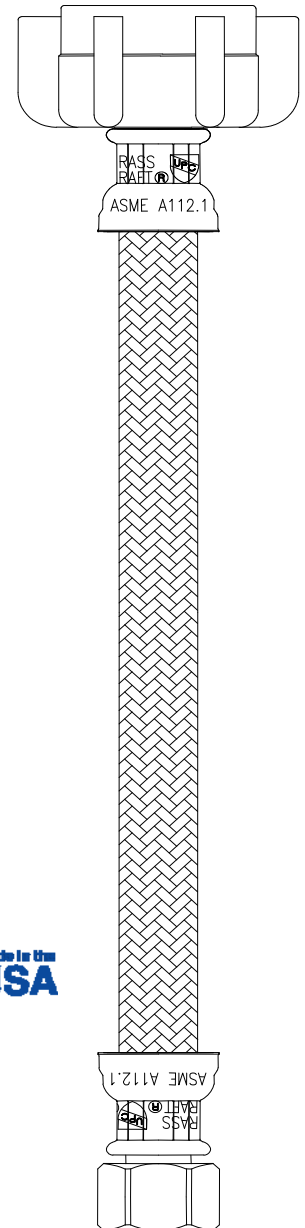


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®

B1-**DL/ B2-**DL/ B3-**DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

Part Listing (con't):

<input type="checkbox"/>	B1-16DL F	3/8" Compression x 7/8" Ballcock x 16" length
<input type="checkbox"/>	B1-20DL F	3/8" Compression x 7/8" Ballcock x 20" length
<input type="checkbox"/>	B1-20DLM F	3/8" Compression x 7/8" Ballcock x 30" length
<input type="checkbox"/>	B1-26DL F	3/8" Compression x 7/8" Ballcock x 36" length
<input type="checkbox"/>	B2-12DL F	7/16" Compression x 7/8" Ballcock x 12" length
<input type="checkbox"/>	B2-20DL F	7/16" Compression x 7/8" Ballcock x 20" length
<input type="checkbox"/>	B3-9DL F	1/2" Compression x 7/8" Ballcock x 9" length
<input type="checkbox"/>	B3-12DL F	1/2" Compression x 7/8" Ballcock x 12" length
<input type="checkbox"/>	B3-12DLM F	1/2" Compression x 7/8" Ballcock (metal nut) x 12" length
<input type="checkbox"/>	B3-20DL F	1/2" Compression x 7/8" Ballcock x 20" length

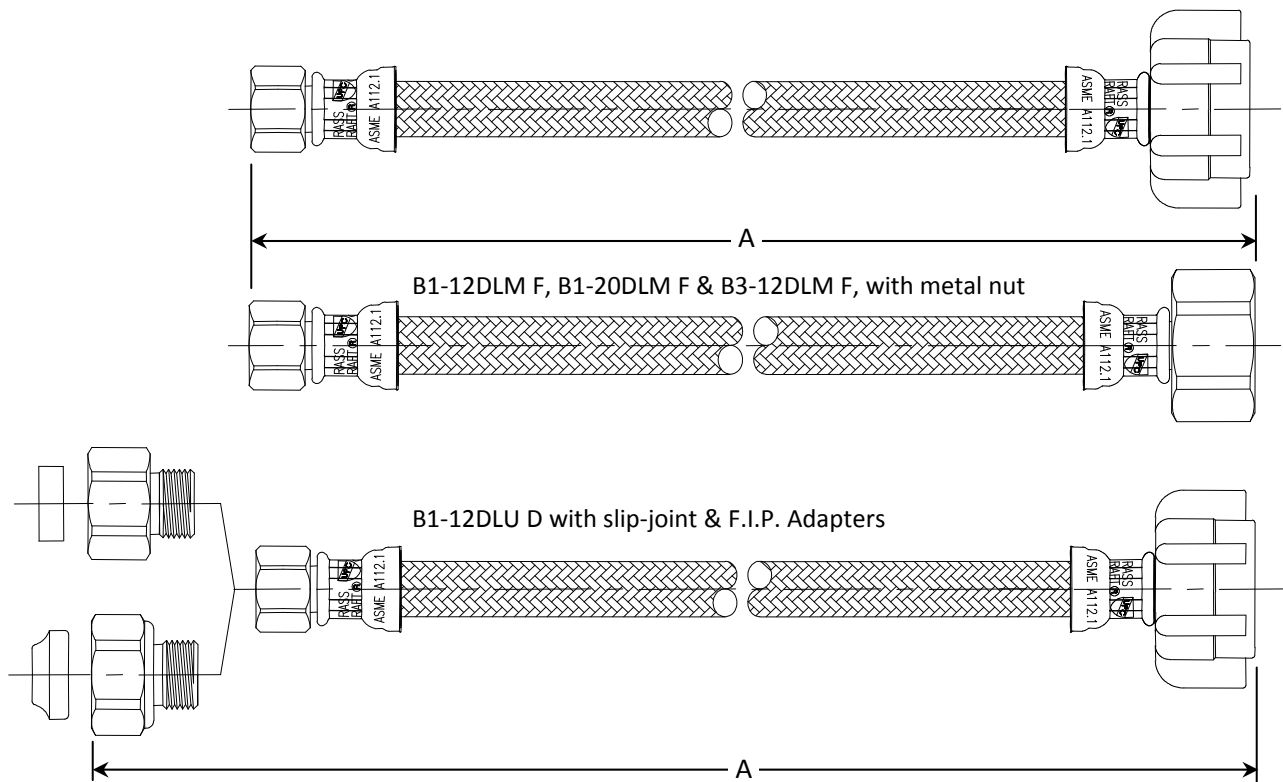

PART DIMENSIONS (Inches)	
Model	Dim. A
B1-6DL	6.0 / 7.0
B1-9DL	9.0 / 10.0
B1-12DL	12.0 / 13.0
B1-12DLM	12.0 / 13.0
B1-12DLU	12.0 / 13.0

PART DIMENSIONS (Inches)	
Model	Dim. A
B1-16DL	16.0 / 17.0
B1-20DL	20.0 / 21.0
B1-20DLM	20.0 / 21.0
B2-12DL	12.0 / 13.0
B2-20DL	20.0 / 21.0

PART DIMENSIONS (Inches)	
Model	Dim. A
B3-9DL	9.0 / 10.0
B3-12DL	12.0 / 13.0
B3-12DLM	12.0 / 13.0
B3-20A	20.0 / 21.0

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®

B1-**DL/ B2-**DL/ B3-**DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)
- UL listed to ANSI/NSF 61 Sec. 9 (File # MH25826)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®