




Features

- Solid brass construction trim
- Includes 5' flexible tubing
- Control box has dual outlets
- One outlet is always "ON" except when air switch is activated
- Over 30 finishes including 15 PVD finishes
- 13A (non-inductive) @ 120V AC
- 1/2 HP (.373 kW) @ 120V AC
- 50-60 Hz

9610-K10


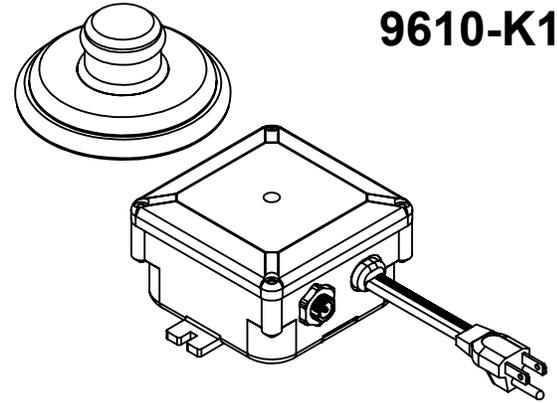


Codes/Standards Applicable



Meets or exceeds the following at date of manufacture:

- UL listed U.S. and Canada (control box)

1/4" X 5' TUBING

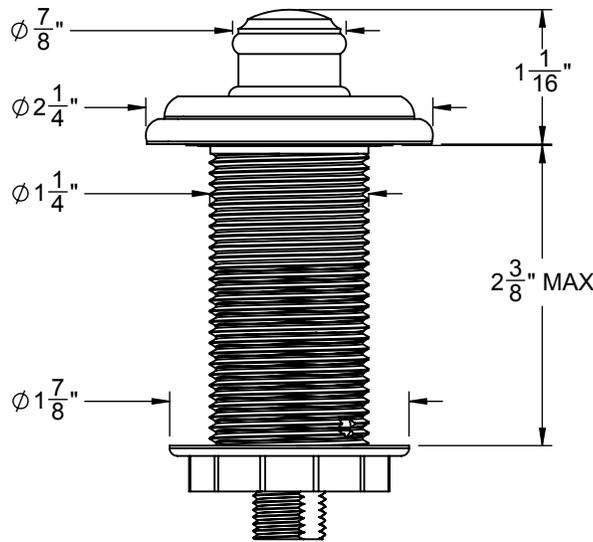

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMENDED	MAX
$\phi 1-1/4"$	$\phi 1-1/4"$	$\phi 1-3/8"$

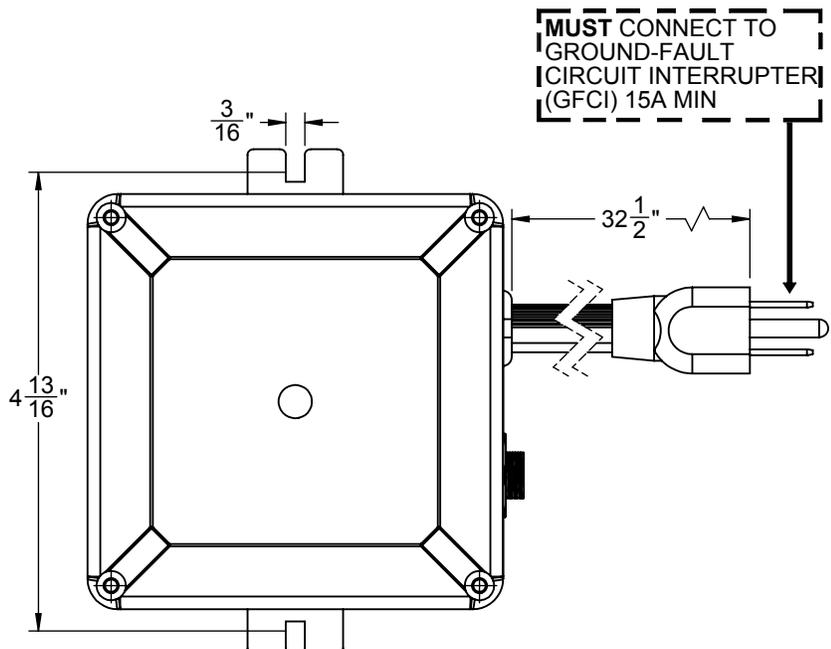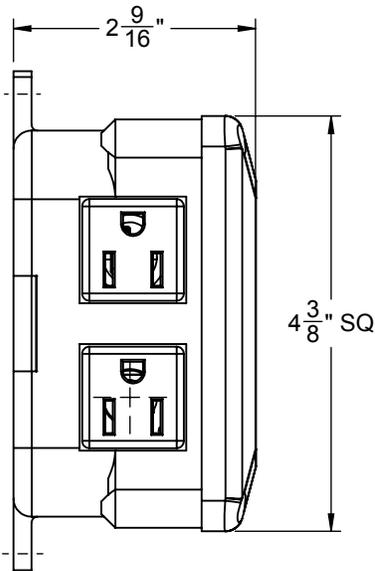

ALL DIMENSIONS SHOWN TO NEAREST 1/16"