


TECHNICAL SPECIFICATIONS

Micro Channel Tee

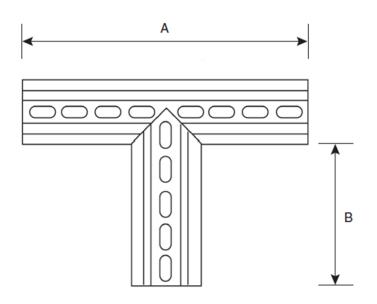

Dimension Key

A: Width of channel at top of "T"

B: Height of channel prior to top of "T"

C: Weight

*note: Please see catalog

Part Number	A	В	С
8371	3"	2"	0.4
8372	3"	2"	0.4
8373	3"	2"	0.4

Load Recommendation Guide

K

Class A

- · Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.

ADA Compliant/Heel-proof

ADA Compliance

NDS provides a wide selection of grates that are complant with the Americans with Disabilities Act. The ADA Accessibility Guidelines For Buildings and Facilities Section 4.5.4 specifies that ground and floor grates "shall have spaces no greater than 1/2 in (13 mm) wide in one direction."

We are pleased to provide grates that comply with these requirements, so that no individual need be limited from accessing the area safely and confidently.

To see if a grate is ADA complant, please check the description of the product in our NDS Drainage Catalog: products that meet these requirements are marked "ADA complant."

Like to find out more about ADA compliance and NDS? Send us your question and we'd be happy to help.





Part #: 8371, 8372, 8373

Fits: Micro Channel.

1" = 4.30 GPM

0.5" = 3.06 GPM

UV Inhibitors

Grate Opening: 3/16" x 5/8"

Head Pressure / Flow Rate:

Head (inches) - Max Flow

Weight Per Each: 0.40 lbs.

Recessed reinforced grate with slots.

Open Surface Area: 1 Sq. Inches per foot

Color: #8371 (White), #8372 (Sand), #8373 (Gray)

Material: PVC



