


ALLIANCE

Specification Sheet

Model: FL100 (Flood Light)

Fixture Height: 5 in. (12.7 cm)
 Fixture Width: 3.75 in. (9.52 cm)
 Base Height: 2.25 in. (5.71 cm)

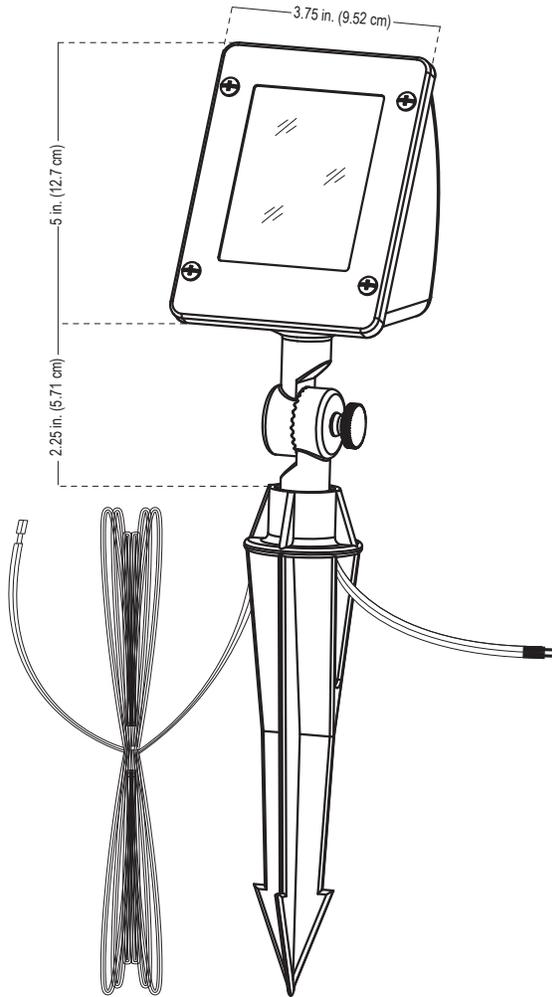

Notes:

Project:
Type:

Specifications and Features:

- Body:** Brass fixture, aged brass finish
- Knuckle:** Solid brass knuckle with dial adjustment
- Face plate:** Brass face plate with rubber gasket attached to fixture with 4 screws
- Lens:** Clear lens
- Socket:** Spring loaded ceramic bi-pin socket with dual contact
- Wire:** Industry First, double wire lead pre-connected to the fixture, 16 awg (*UL listed*), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Stake:** Plastic ground stake, attached to the fixture (8.5 in; 21.6 cm length)
- Warranty:** Lifetime warranty on fixture housing
- Certification:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL and cETL Listed Mark.



Lamp Options

Model #	Base Type	Wattage	Lumen Output
LBIPIN-LED-3W	Bipin/G4	3w	150lm
LXELOGEN-20 (Halogen)	Bipin/G4	20w	150lm


LED Ordering Guide: Model-LED
 Example: FL100-LED

Accessories Available:

Mounting Accessories:	FL100 Accessories
RISER6 - 6" brass riser, aged brass finish	Hex Louver
RISER12 - 12" brass riser, aged brass finish	
RISER18 - 18" brass riser, aged brass finish	
RISERADJ - Adjustable plastic riser, aged brass cap	
RMB - Round Mounting Base	
GUTTERMOUNT	

Project:
Type:

Model: LBIPIN-LED-3W (3 watt BIPIN LED)

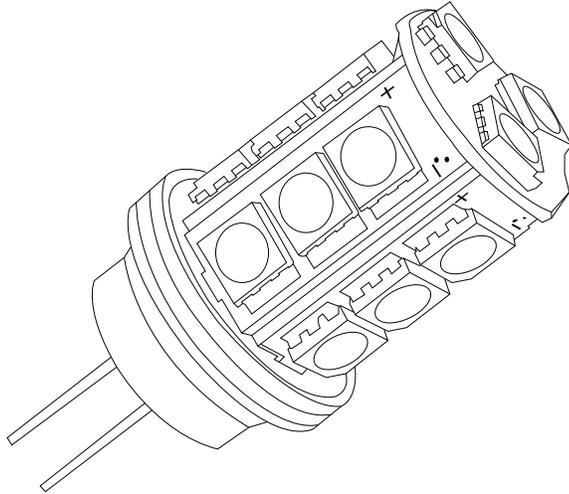

Specifications and Features:

- Watts:** 3
- Base Type:** G4/BiPin
- Light Output:** 150 lumens
- Color:** Warm White
- Color Temperatures:** 2700K
- Operating Voltage:** 8-24v
- CRI:** Ra>80
- LED Chip Qty:** 18 Pieces
- Halogen Equivalent:** 20w
- Rated Hours:** 50,000 hrs
- Ambient Operating Temperature:** <72°C
- Transformer Compatibility:** Must be powered by magnetic transformer
- Warranty:** Five year limited warranty on LED components

Lamp Color Options

Model #	Color	Color Temp.	Base Type	Wattage	Lumen Output
LBIPINLED-3W-3K	Bright White	3000K	BIPIN/G4	3w	150lm
LBIPIN-LED-3W-AMBER*	Amber	Amber	BIPIN/G4	3w	150lm

*Turtle Safe

Notes: