


Combination Rate of Flow Controller & Solenoid Shut-off Valve

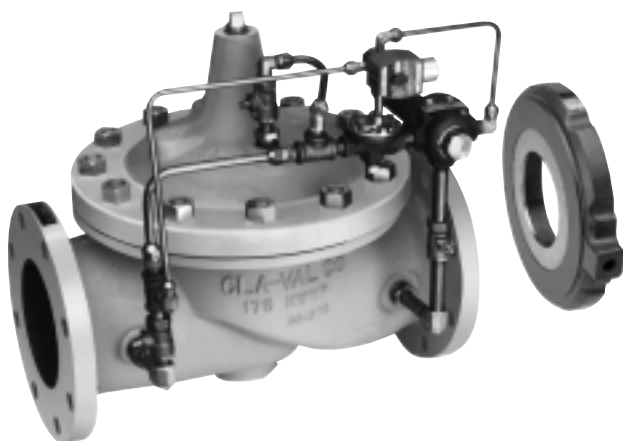

Schematic Diagram

Item	Description
1	Hytrol (Main Valve)
2	X58C Restriction Fitting
3	100-01 Hytrol (Reverse Flow)
4	CDHS18 Differential Control
5	CS3 Solenoid Control
6	X52E Orifice Plate Assembly


Optional Features

Item	Description
A	X46A Flow Clean Strainer
B	CK2 Cock (Isolation Valve)
C	CV Flow Control (Closing)
D	Check Valves with Cock
H	Solenoid Drain to Atmosphere
S	CV Flow Control (Opening)
Y	X43 "Y" Strainer

- **Multi-functional Capability**
- **Includes Orifice Plate with Holder**
- **Optional Check Feature**
- **Easily Adjusted**
- **Every Valve Factory Tested**


The Cla-Val Model 43-01/643-01 Combination Rate of Flow Controller and Solenoid Shut-off Valve limits the maximum flow rate regardless of changing line pressure. It is a hydraulically operated, pilot controlled, diaphragm valve. The pilot control is actuated by the differential pressure produced across an orifice plate installed downstream of the valve. Accurate control is assured as very small changes in the controlling differential pressure produce immediate corrective action of the main valve. A solenoid control is provided to intercept the operation of the differential control and close the main valve.

The Model 43-01/643-01 includes a orifice plate with a holder that should be installed one to five pipe diameters downstream of the main valve. If the check feature option is added and a pressure reversal occurs, the downstream pressure is admitted into the main valve cover chamber and the valve closes to prevent return flow.

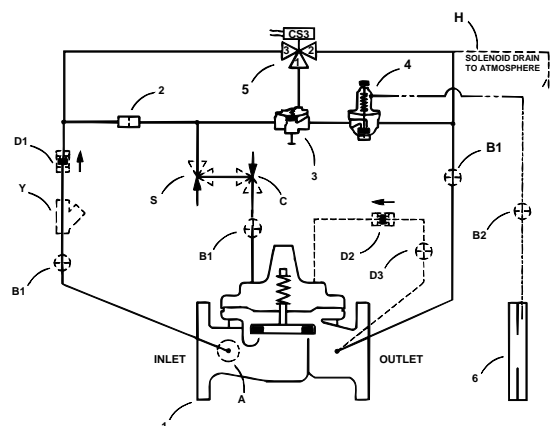


The "D" feature on a vertically installed 6" and larger valve must be horizontally installed.

Typical Applications

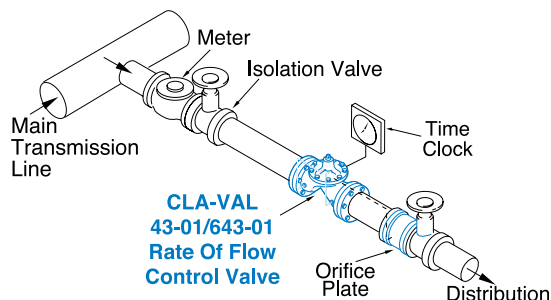

The 43-01/643-01 is typically installed where water supply to a system must be limited to a pre-set maximum flow rate at certain times of day. The valve is easily set to maintain the maximum allowable flow rate and is to open or close on an electrical signal.

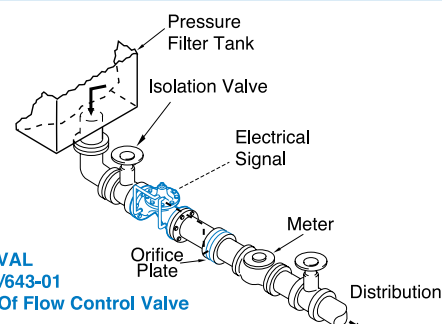

The 43-01/643-01 is typically installed as a pressure type filter effluent control valve where a constant flow rate is maintained as head loss through the filter varies. The valve is installed where it is to open or close on an electrical signal.

Model 43-01 (Uses Basic Valve Model 100-01)

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class			
		Flanged			Screwed
Grade	Material	ANSI Standards*	150 lb.	300 lb.	End ① Details
ASTM A536	Ductile Iron	B16.42	250	400	400
ASTM A216-WCB	Cast Steel	B16.5	285	400	400
ASTM B62	Bronze	B16.24	225	400	400
ASTM A743	Stainless Steel	B16.5	285	400	400
356-T6	Aluminum	B16.1	275	—	—

Note: ① End Details machined to ANSI B2.1 specifications.
 *ANSI standards are for flange dimensions only.
 Flanged valves are available faced but not drilled.

Materials

Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	1½" - 16", 24"	1½"- 16", 24"	1½" - 16"	1½" - 16"	1½" - 16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						
Stem, Nut & Spring	Stainless Steel						




2" Globe, Screwed




4" Globe, Flanged



4" Angle, Flanged

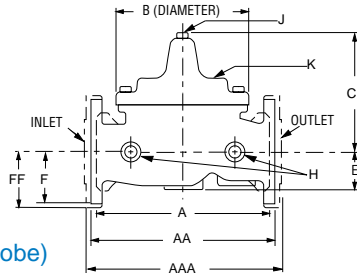

100-01 (Globe)



100-01 (Angle)

Model 43-01 Dimensions (In inches)

*1½" Size Only

Valve Size (Inches)	1½	2	2 ½	3	4	6	8	10	12	14	16	24
A Screwed	7.25	9.38	11.00	12.50	—	—	—	—	—	—	—	—
AA 150 ANSI	8.50*	9.38	11.00	12.00	15.00	20.00	25.38	29.75	34.00	39.00	41.38	61.50
AAA 300 ANSI	9.00	10.00	11.62	13.25	15.62	21.00	26.38	31.12	35.50	40.50	43.50	63.24
B Dia.	5.62	6.62	8.00	9.12	11.50	15.75	20.00	23.62	28.00	32.75	35.50	53.16
C Max.	5.50	6.50	7.56	8.19	10.62	13.38	16.00	17.12	20.88	24.19	25.00	43.93
D Screwed	3.25	4.75	5.50	6.25	—	—	—	—	—	—	—	—
DD 150 ANSI	4.00*	4.75	5.50	6.00	7.50	10.00	12.75	14.88	17.00	19.50	20.81	—
DDD 300 ANSI	4.25*	5.00	5.88	6.38	7.88	10.50	13.25	15.56	17.75	20.25	21.62	—
E	1.12	1.50	1.69	2.06	3.19	4.31	5.31	9.25	10.75	12.62	15.50	17.75
F 150 ANSI	2.50	3.00	3.50	3.75	4.50	5.50	6.75	8.00	9.50	10.50	11.75	19.25
FF 300 ANSI	3.06	3.25	3.75	4.13	5.00	6.25	7.50	8.75	10.25	11.50	12.75	—
G Screwed	1.88	3.25	4.00	4.50	—	—	—	—	—	—	—	—
GG 150 ANSI	4.00*	3.25	4.00	4.00	5.00	6.00	8.00	8.62	13.75	14.88	15.69	—
GGG 300 ANSI	4.25*	3.50	4.31	4.38	5.31	6.50	8.50	9.31	14.50	15.62	16.50	—
H NPT Body Tapping	⅜	⅜	½	½	¾	¾	1	1	1	1	1	1
J NPT Cover Center Plug	¼	½	½	½	¾	¾	1	1	1 ¼	1 ½	2	1 ½
K NPT Cover Tapping	⅜	⅜	½	½	¾	¾	1	1	1	1	1	1
Valve Stem Internal												
Thread UNF	10-32	10-32	10-32	¼-28	¼-28	⅜-24	⅜-24	⅜-24	⅜-24	⅜-24	½-20	¾-16
Stem Travel	0.4	0.6	0.7	0.8	1.1	1.7	2.3	2.8	3.4	4.0	4.5	6.50
Approx. Ship Wt. Lbs.	15	35	50	70	140	285	500	780	1165	1600	2265	6200

Model 643-01 (Uses Basic Valve Model 100-20)

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class		
		Flanged		
Grade	Material	ANSI Standards*	150 lb.	300 lb.
ASTM A536	Ductile Iron	B16.42	250	400
ASTM A216-WCB	Cast Steel	B16.5	285	400
ASTM B62	Bronze	B16.24	225	400
ASTM A743	Stainless Steel	B16.5	285	400
356-T6	Aluminum	B16.1	275	—


Note: *ANSI standards are for flange dimensions only.
Flanged valves are available faced but not drilled.

Materials


Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	3"-30"	3"-30"	3"-16"	3"-16"	3"-16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						




3" Globe, Flanged



6" Globe, Flanged

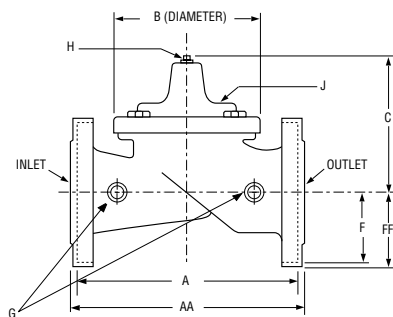

100-20 (Globe)



100-20 (Angle)



























6" Angle, Flanged
















Model 643-01 Dimensions (In inches)

VALVE SIZE (Inches)	3	4	6	8	10	12	14	16	18	20	24	30
A 150 ANSI	10.25	13.88	17.75	21.38	26.00	30.00	34.25	35.00	42.12	48.00	48.00	63.25
AA 300 ANSI	11.00	14.50	18.62	22.38	27.38	31.50	—	36.62	43.63	49.62	49.75	—
B DIA.	6.62	9.12	11.50	15.75	20.00	23.62	28.00	28.00	35.44	35.44	35.44	53.19
C MAX.	7.00	8.62	11.62	15.00	17.88	21.00	20.88	25.75	25.00	31.00	31.00	43.94
D 150 ANSI	—	6.94	8.88	10.69	—	—	—	—	—	—	—	—
DD 300 ANSI	—	7.25	9.38	11.19	—	—	—	—	—	—	—	—
E 150 ANSI	—	5.50	6.75	7.25	—	—	—	—	—	—	—	—
EE 300 ANSI	—	5.81	7.25	7.75	—	—	—	—	—	—	—	—
F 150 ANSI	3.75	4.50	5.50	6.75	8.00	9.50	11.00	11.75	15.88	14.56	17.00	19.88
FF 300 ANSI	4.12	5.00	6.25	7.50	8.75	10.25	—	12.75	15.88	16.06	19.00	—
G NPT Body Tapping	3/8	1/2	3/4	3/4	1	1	1	1	1	1	1	1
H NPT Cover Center Plug	1/2	1/2	3/4	3/4	1	1	1 1/4	1 1/4	2	2	2	2
J NPT Cover Tapping	3/8	1/2	3/4	3/4	1	1	1	1	1	1	1	1
Valve Stem Internal Thread UNF	10-32	1/4-28	1/4-28	3/8-24	3/8-24	3/8-24	3/8-24	3/8-24	1/2-20	1/2-20	1/2-20	3/4-16
Stem Travel	0.6	0.8	1.1	1.7	2.3	2.8	3.4	3.4	4.5	4.5	4.5	6.5
Approx Ship Wt. Lbs.	45	85	195	330	625	900	1250	1380	2733	2551	2733	6500

Valve Selection

These Symbols  and  Indicate Available Sizes

		Valve Selection															
		Inches	1 1/2	2	2 1/2	3	4	6	8	10	12	14	16	18	20	24	30
		mm	40	50	65	80	100	150	200	250	300	350	400	450	500	600	750
		End Detail	Screwed & Flanged					Flanged									
Model 43-01	Basic Valve 100-01	Globe															
		Angle															
	Suggested Flow (GPM)	Max. Continuous	125	210	300	460	800	1800	3100	4900	7000	8400	11000			25000	
		Max. Intermittent	160	260	370	580	990	2250	3900	6150	8720	10540	13700			31300	
		Min. Continuous	10	15	20	30	50	115	200	300	400	500	650			1750	
	Suggested Flow (Liters/sec)	Max. Continuous	8	13	19	29	50	113	195	309	441	529	693			1575	
		Max. Intermittent	10.1	16.4	23	37	62	142	246	387	549	664	863			1972	
		Min. Continuous	.6	.9	1.3	1.9	3.2	7.2	13	19	25	32	41			110	

Model 643-01	Basic Valve 100-20	Globe															
		Angle															
	Suggested Flow (GPM)	Max. Continuous				260	580	1025	2300	4100	6400	9230	9230	16500	16500	16500	28000
		Min. Continuous				15	30	50	115	200	300	500	500	900	900	900	1850
	Suggested Flow (Liters/sec)	Max. Continuous				16	37	65	145	258	403	581	581	1040	1040	1040	1764
		Min. Continuous				.9	1.9	3.2	7.2	13	19	32	32	57	57	57	117

* 643-01 is the reduced internal port size version of the 43-01.


For 100-01 basic valves suggested flow calculations were based on flow through Schedule 40 Pipe. Maximum continuous flow is approx. 20 ft/sec (6.1 meters/sec) & maximum intermittent is approx. 25 ft/sec (7.6 meters/sec) and minimum continuous flow is approx. 1 ft/sec (.3 meters/sec). For 100-20 basic valves suggested flow calculations were based on flow through the valve seat. Approx. 26 ft/sec (7.9 meters/sec) was used for maximum continuous flow & 1 ft/sec (.3 meters/sec) is used for minimum continuous flow. Maximum continuous flow through the valve seat for the 30" 100-20 is approx. 20 ft/sec (6.1 meters/sec).

Many factors should be considered in sizing pressure reducing valves including inlet pressure, outlet pressure and flow rates. For sizing questions or cavitation analysis, consult Cla-Val with system details.

**Flanged End Detail Only

Pilot System Dimensions (In Inches)

VALVE SIZE	1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	30"
X Max.	9.50	9.75	10.25	10.75	11.75	13.75	15.75	15.75	19.75	19.75	21.75	21.75	22.75	50.00	50.00
Y Max.	4.00	4.00	4.50	5.00	6.00	8.00	10.25	12.00	14.25	16.75	18.00	18.00	18.00	30.00	30.00
Z Max.	6.75	6.75	7.75	8.25	9.50	10.25	11.00	14.50	15.50	17.00	19.00	19.00	19.00	30.00	30.00

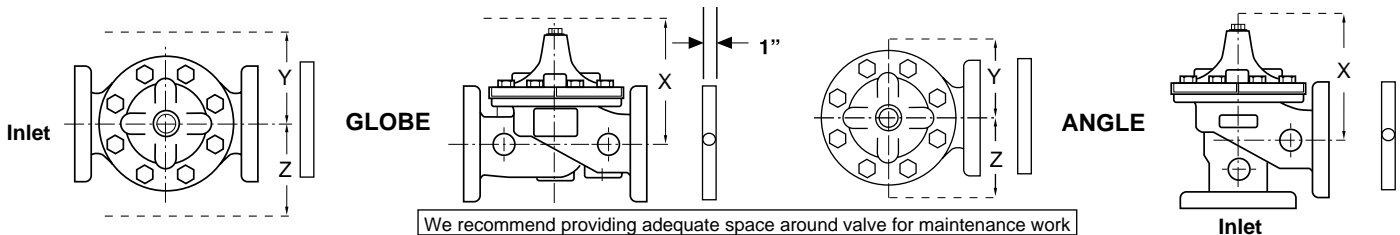

Pilot System Specifications

This valve is furnished either normally open (de-energized to open), or normally closed (energized to open)

Adjustment Range

Low flow equals one-fourth maximum flow.

Electrical Ratings

24, 48, 120, 240, 480 - 60 Hz AC
6, 12, 24, 120, 240 DC

Temperature Range

Water: to 180°F

Materials

Standard Pilot System Materials

Pilot Control: Bronze ASTM B62
Trim: Stainless Steel 303
Orifice Plate: Stainless Steel 303
Rubber: Buna-N® Synthetic Rubber

Optional Pilot System Materials

Pilot systems are available with optional Aluminum, Stainless Steel or Monel materials at extra cost.

When Ordering, Please Specify

1. Catalog No. 43-01 or No. 643-01
2. Valve Size
3. Pattern - Globe or Angle
4. Pressure Class
5. Screwed or Flanged
6. Trim Material
7. Adjustment Range/Orifice Bore
8. Energized or De-Energized to Open
9. Desired Options
10. When Vertically Installed

Note: Orifice plate assembly (X52E) may be attached to the main valve outlet flange, however, better control is obtained if it is located one to five pipe diameters downstream. Orifice plate sensing connection should be located in the pipeline on the side of the orifice plate assembly. The orifice plate assembly should not be mounted directly to a butterfly valve.



E-43-01/643-01 (R-11/01)

CLA-VAL

PO Box 1325 Newport Beach CA 92659-0325
Phone: 949-722-4800 • Fax: 949-548-5441

CLA-VAL CANADA, LTD.

4687 Christie Drive
Beamsville, Ontario
Canada LOR 1B4
Phone: 905-563-4963
Fax: 905-563-4040

© COPYRIGHT CLA-VAL 2001 Printed in USA
Specifications subject to change without notice.

CLA-VAL SA

Chemin des Mesanges 1
CH-1032 Romanel/
Lausanne, Switzerland
Phone: 41-21-643-15-55
Fax: 41-21-643-15-50

www.cla-val.com

Represented By: