


Float Valve

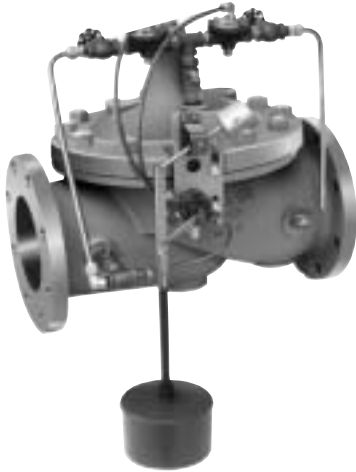

Schematic Diagram

Item	Description
1	100-01 Hytrol (Main Valve)
2	CF1-C1 Float Control
3	100-01 Hytrol (Reverse Flow)
4	CGB Globe Valve


Optional Features

Item	Description
A	X46A Flow Clean Strainer
B	CK2 Cock (Isolation Valve)
F	Independent Operating Pressure
S	CGB Globe Valve
Y	X43 "Y" Strainer

- Accurate & Repeatable Level Control
- On-Off Non-Modulating Action
- Fully Adjustable High & Low Level Settings
- Simple Design, Proven Reliable
- Easy Installation and Maintenance

The Cla-Val Model 124-02/624-02 Float Valve is a non-modulating valve which accurately controls the liquid level in tanks. This valve is designed to open fully when the liquid level reaches a preset low point, and close drip tight when the level reaches a preset high point.

This is a hydraulically operated, diaphragm valve with the pilot control and float mechanism mounted on the cover of the main valve. The float positions the pilot control to close the valve when the float contacts the upper stop. The high and low liquid levels are adjusted by positioning the stop collars on the float rod. The difference between high and low levels can be adjusted to as little as one inch, or to as much as 18 inches. Level settings can be as much as 11-1/2 feet below the valve. The float mechanism may be located remotely from the main valve. See the technical data sheet on Model CF1-C1 Float Control for additional information.

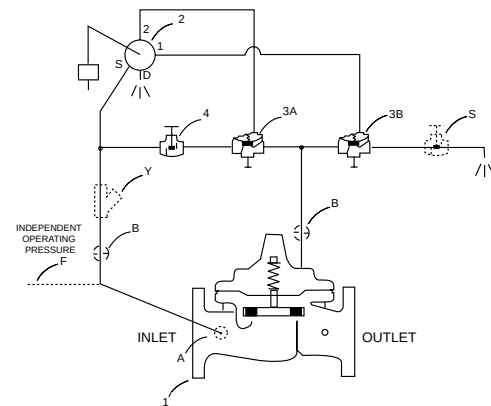

Typical Applications

The Model 124-02/624-02 Float Valve is commonly mounted above the high water level in a tank. Globe pattern valves are supplied standard with the float control mounted on the right side of the cover as

illustrated, with a horizontal discharge. Angle valves are configured to discharge downward.

Note: We recommend protecting tubing and valve from freezing temperatures.


Installation

A stilling well (8" minimum diameter) must be provided around the float if the liquid surface is subject to turbulence, ripples or wind. When the valve is mounted on top of the tank roof a 2" clearance hole should be provided for side movement of the float rod where the rod goes through the top of the tank.

An independent source of air or water may be used to operate the valve. The pressure from this independent source must at all times be equal to or greater than pressure at the valve inlet.

If minimum flowing line pressure is less than 10 psi, consult Cla-Val for full details.

If the float control is remotely mounted from the main valve, the control may be installed at any elevation above the valve, provided the flowing line pressure in psi is equal to or greater than the vertical distance in feet between the valve and the float control. See the data sheet on Model CF1-C1 for additional information.

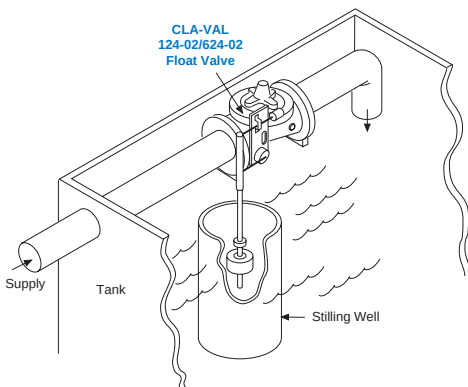

Model 124-02 (Uses Basic Valve Model 100-01)

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class			
		ANSI Standards*	Flanged		Screwed
Grade	Material		150 lb.	300 lb.	End** Details
ASTM A536	Ductile Iron	B16.42	250	400	400
ASTM A216-WCB	Cast Steel	B16.5	285	400	400
ASTM B62	Bronze	B16.24	225	400	400
ASTM A743	Stainless Steel	B16.5	285	400	400
356-T6	Aluminum	B16.1	275	—	—

Note: *ANSI standards are for flange dimensions only.
 Flanged valves are available faced but not drilled.
 ** End Details machined to ANSI B2.1 specifications.

Materials

Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	8" - 16", 24"	8" - 16", 24"	8" - 16"	8" - 16"	8" - 16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						
Stem, Nut & Spring	Stainless Steel						

Cover Capacity


Liquid Volume Displaced from Diaphragm Chamber When Valve Opens			
Valve Size	Displacement	Valve Size	Displacement
8"	1.26 gal	14"	6.50 gal
10"	2.51 gal	16"	9.57 gal
12"	4.00 gal	24"	29.00 gal




4" Angle, Flanged



16" Globe, Flanged



100-01 (Globe)



100-01 (Angle)

Model 124-02 (Uses Basic Valve Model 100-01)

Valve Size (Inches)	8	10	12	14	16	24
A Screwed	—	—	—	—	—	—
AA 150 ANSI	25.38	29.75	34.00	39.00	41.38	61.50
AAA 300 ANSI	26.38	31.12	35.50	40.50	43.50	63.24
B Dia.	20.00	23.62	28.00	32.75	35.50	53.16
C Max.	16.00	17.12	20.88	24.19	25.00	43.93
D Screwed	—	—	—	—	—	—
DD 150 ANSI	12.75	14.88	17.00	19.50	20.81	—
DDD 300 ANSI	13.25	15.56	17.75	20.25	21.62	—
E	5.31	9.25	10.75	12.62	15.50	17.75
F 150 ANSI	6.75	8.00	9.50	10.50	11.75	19.25
FF 300 ANSI	7.50	8.75	10.25	11.50	12.75	—
G Screwed	—	—	—	—	—	—
GG 150 ANSI	8.00	8.62	13.75	14.88	15.69	—
GGG 300 ANSI	8.50	9.31	14.50	15.62	16.50	—
H NPT Body Tapping	1	1	1	1	1	1
J NPT Cover Center Plug	1	1	1 ¼	1 ½	2	1 ½
K NPT Cover Tapping	1	1	1	1	1	1
Valve Stem Internal Thread UNF	¾-24	¾-24	¾-24	¾-24	½-20	3/4-16
Stem Travel	2.3	2.8	3.4	4.0	4.5	6.50
Approx. Ship Wt. Lbs.	500	780	1165	1600	2265	6200

Model 624-02 (Uses Basic Valve Model 100-20)

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class		
		Flanged		
Grade	Material	ANSI Standards*	150 lb.	300 lb.
ASTM A536	Ductile Iron	B16.42	250	400
ASTM A216-WCB	Cast Steel	B16.5	285	400
ASTM B62	Bronze	B16.24	225	400
ASTM A743	Stainless Steel	B16.5	285	400
356-T6	Aluminum	B16.1	275	—

Note: *ANSI standards are for flange dimensions only.
Flanged valves are available faced but not drilled.

Cover Capacity

Liquid Volume Displaced from Diaphragm Chamber When Valve Opens			
Valve Displacement Size		Valve Displacement Size	
10"	1.26 gal	18"	4.00 gal
12"	2.51 gal	20"	9.57 gal
14"	2.51 gal	24"	9.57 gal
16"	4.00 gal	30"	29.00 gal

Materials

Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	10"-30"	10"-30"	10"-16"	10"-16"	10"-16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						
Stem, Nut & Spring	Stainless Steel						




12" Globe, Flanged




20" Globe, Flanged

Dimensions (In inches)

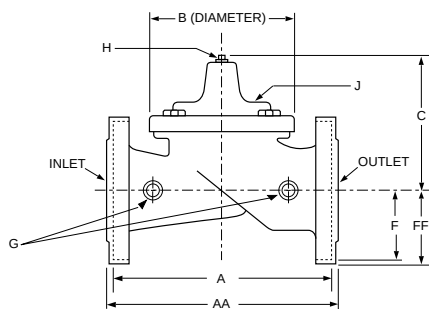

100-20 (Globe)



100-20 (Angle)

Model 624-02 (Uses Basic Valve Model 100-20)

VALVE SIZE (Inches)	10	12	14	16	18	20	24	30
A 150 ANSI	26.00	30.00	34.25	35.00	42.12	48.00	48.00	63.25
AA 300 ANSI	27.38	31.50	—	36.62	43.63	49.62	49.75	—
B DIA.	20.00	23.62	28.00	28.00	35.44	35.44	35.44	53.19
C MAX.	17.88	21.00	20.88	25.75	25.00	31.00	31.00	43.94
D 150 ANSI	—	—	—	—	—	—	—	—
DD 300 ANSI	—	—	—	—	—	—	—	—
E 150 ANSI	—	—	—	—	—	—	—	—
EE 300 ANSI	—	—	—	—	—	—	—	—
F 150 ANSI	8.00	9.50	11.00	11.75	15.88	14.56	17.00	19.88
FF 300 ANSI	8.75	10.25	—	12.75	15.88	16.06	19.00	—
G NPT Body Tapping	1	1	1	1	1	1	1	1
H NPT Cover Center Plug	1	1	1 1/4	1 1/4	2	2	2	2
J NPT Cover Tapping	1	1	1	1	1	1	1	1
Valve Stem Internal Thread UNF	3/8-24	3/8-24	3/8-24	3/8-24	1/2-20	1/2-20	1/2-20	3/4-16
Stem Travel	2.3	2.8	3.4	3.4	4.5	4.5	4.5	6.5
Approx Ship Wt. Lbs.	625	900	1250	1380	2733	2551	2733	6500

Valve Selection

		These Symbols  and  Indicate Available Sizes*								
Inches		8	10	12	14	16	18	20	24	30
mm		200	250	300	350	400	450	500	600	750
End Detail		Flanged								
Model 124-02	Basic Valve 100-01	Globe								
		Angle								
	Suggested Flow (GPM)	Max. Continuous	3100	4900	7000	8400	11000		25000	
		Max. Intermittent	68	120	160	10540	13700		31300	
	Suggested Flow (Liters/sec)	Max. Continuous	195.3	308.7	441	529	693		1575	
		Max. Intermittent	4.3	7.6	10	664	863		1972	
Model 624-02	Basic Valve 100-20	Globe								
		Angle								
	Suggested Flow (GPM)	Max. Continuous		4100	6400	9230	9230	16500	16500	28000
	Suggested Flow (Liters/sec)	Max. Continuous		258	403	581	581	1040	1040	1764


* 624-02 is the reduced internal port size version of the 124-02.

For 100-01 basic valves suggested flow calculations were based on flow through Schedule 40 Pipe. Maximum continuous flow is approx. 20 ft/sec (6.1 meters/sec) & maximum intermittent is approx. 25 ft/sec (7.6 meters/sec). For 100-20 basic valves suggested flow calculations were based on flow through the valve seat. Approx. 26 ft/sec (7.9 meters/sec) is used for maximum continuous flow. Maximum continuous flow through the valve seat of the 30" 100-20 is approx 20 ft/sec (6.1 meters/sec).

*See the 124-01/624-01 Technical Data Sheet for smaller sizes.

Pilot System Dimensions

(In Inches)

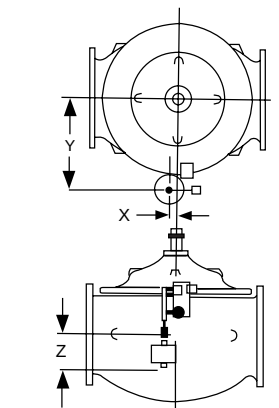


GLOBE 124-02 8" to 16"
624-02 10" to 30"

124-02 Float Valve (Globe)						
Size	8"	10"	12"	14"	16"	24"
X	1.25	1.25	1.00	.50	.25	1.25
Y	12.75	14.75	17.00	19.50	21.00	30.00
Z (Max)	48.25	47.00	45.25	44.50	43.25	32.00

124-02 Float Valve (Angle)					
Size	8"	10"	12"	14"	16"
X	1.25	1.25	1.00	.50	.25
Y	12.75	14.75	17.00	19.50	21.00
Z (Max)*	48.25	47.00	45.25	44.50	43.25

624-02 Float Valve (Globe)							
Size	10"	12"	16"	18"	20"	24"	30"
X	1.25	1.25	1.00	1.00	.25	.25	.25
Y	12.75	14.75	17.00	17.00	21.00	21.00	30.00
Z (Max)*	45.00	43.00	40.25	40.25	36.75	36.75	32.00

*Z(Max) is with standard float rod

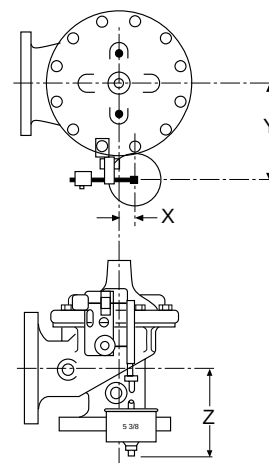

ANGLE 124-02 8" to 16"

Pilot System Specifications

Pressure Rating

300 psi Max.

Temperature Rating

Water: to 180°F. Max.

Materials

In contact with operating fluid: Brass, Stainless Steel, Monel, with Buna-N® seals
Float linkage and float rod: Brass and PVC
Base plate: Treated Steel
Float: Polypropylene

Float

5 3/8" diameter. If maximum temperature exceeds 160°F specify stainless steel float and rod. Available at extra cost.

Float Rod

Standard: Two 12" sections of PVC rod, with 12" extension increments at extra cost.

Optional: 24" stainless steel rod, with 24" extension increments at extra cost.
larger counterweight is required if float rod length exceeds 2'.

Adjustment Range

Level Differential:

1" min. to 18" max. with PVC rod.

1" min to 40" max. with stainless steel rod.

Operating Fluids

Clean liquids or gases compatible with specified materials.

When Ordering, Please Specify

1. Catalog No. 124-02 or No. 624-02
2. Valve Size
3. Pattern - Globe or Angle
4. Pressure Class
5. Screwed or Flanged
6. Float Rod Material and Length
7. Float Ball Material
8. Desired Options
9. When Vertically Installed



E-124-02/624-02 (R-03/03)

CLA-VAL

PO Box 1325 Newport Beach CA 92659-0325
Phone: 949-722-4800 • Fax: 949-548-5441

CLA-VAL CANADA

4687 Christie Drive
Beamsville, Ontario
Canada LOR 1B4
Phone: 905-563-4963
Fax: 905-563-4040

CLA-VAL EUROPE

Chemin des Mésanges 1
CH-1032 Romanel/
Lausanne, Switzerland
Phone: 41-21-643-15-55
Fax: 41-21-643-15-50

COPYRIGHT CLA-VAL 2003 Printed in USA
Specifications subject to change without notice.

www.cla-val.com

Represented By: