

Pressure Reducing Valve



- Sensitive and Accurate Pressure Control
- Easy Adjustment and Maintenance
- Tamper Resistant
- Optional Check Feature
- Fully Supported Frictionless Diaphragm

The Cla-Val Model 90-01/690-01 Pressure Reducing Valve automatically reduces a higher inlet pressure to a steady lower downstream pressure regardless of changing flow rate and/or varying inlet pressure. This valve is an accurate, pilot-operated regulator capable of holding downstream pressure to a pre-determined limit. When downstream pressure exceeds the pressure setting of the control pilot, the main valve and pilot valve close drip tight.

If a check feature is added, and a pressure reversal occurs, the downstream pressure is admitted in the main valve cover chamber closing the valve to prevent return flow.


Schematic Diagram

Item	Description
1	Hytrol (Main Valve)
2	X58 Restriction Fitting
3	CRD Pressure Reducing Control

Optional Features

Item	Description
A	X46A Flow Clean Strainer
B	CK2 Cock (Isolation Valve)
C	CV Flow Control (Closing)*
D	Check Valves with Cock
S	CV Flow Control (Opening)
Y	X43 "Y" Strainer


*The closing speed control (optional) on this valve should always be open at least three (3) turns off its seat.

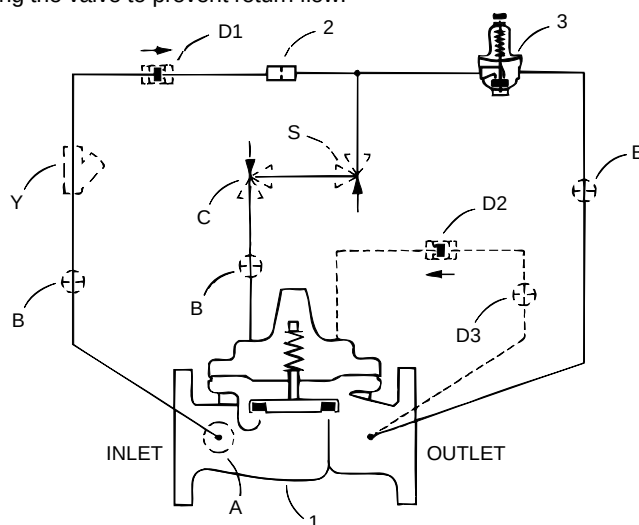


The "D" feature on a vertically installed 6" and larger valve must be horizontally installed.

Typical Applications

Typical pressure reducing valve station using Model 90-01AB/690-01AB and Model 90-01AS/690-01AS in parallel to handle wide range of flow rates. Larger Model 90-01AB/690-01AB valve takes care of peak loads and smaller Model 90-01AS/690-01AS handles low flows.

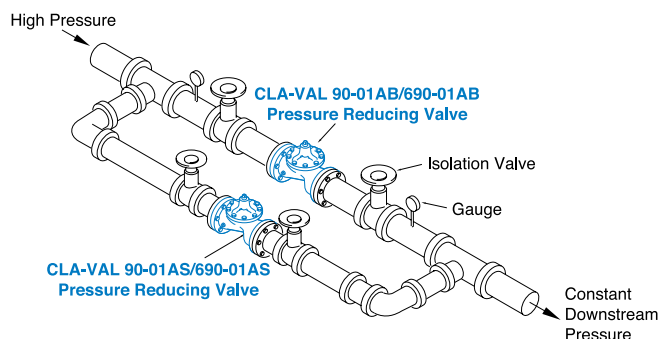

The 90-01D/690-01D Combination Pressure Reducing and Check Valve is installed downstream of a pump where a constant system pressure is required. The check feature is to prevent reverse flow through the pump and to hold system pressure when the pump is off.

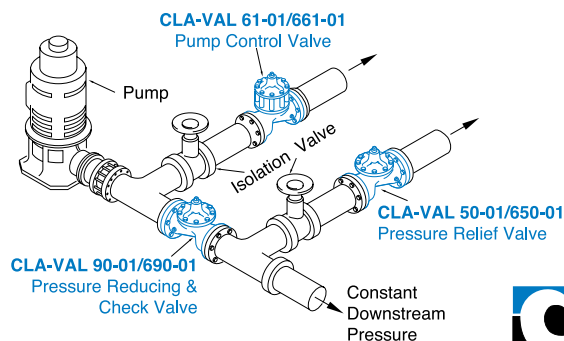

Model 90-01 (Uses Basic Valve Model 100-01)

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class			
		Flanged			Screwed
Grade	Material	ANSI Standards*	150 lb.	300 lb.	End** Details
ASTM A536	Ductile Iron	B16.42	250	400	400
ASTM A216-WCB	Cast Steel	B16.5	285	400	400
ASTM B62	Bronze	B16.24	225	400	400
ASTM A743	Stainless Steel	B16.5	285	400	400
356-T6	Aluminum	B16.1	275	—	—

Note: *ANSI standards are for flange dimensions only.
Flanged valves are available faced but not drilled.
** End Details machined to ANSI B2.1 specifications.



2" Globe, Screwed




4" Globe, Flanged




4" Angle, Flanged

Materials

Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	1¼" - 16", 24"	1¼" - 16", 24"	1¼" - 16"	1¼" - 16"	1¼" - 16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						
Stem, Nut & Spring	Stainless Steel						

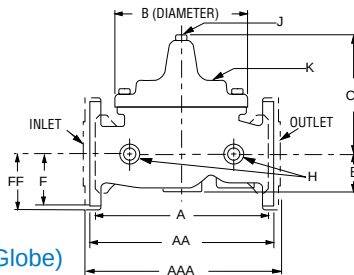

100-01 (Globe)



100-01 (Angle)

Model 90-01 Dimensions (In inches)

*1½" Size Only

Valve Size (Inches)	1¼	2	2 ½	3	4	6	8	10	12	14	16	24
A Screwed	7.25	9.38	11.00	12.50	—	—	—	—	—	—	—	—
AA 150 ANSI	8.50*	9.38	11.00	12.00	15.00	20.00	25.38	29.75	34.00	39.00	41.38	61.50
AAA 300 ANSI	9.00*	10.00	11.62	13.25	15.62	21.00	26.38	31.12	35.50	40.50	43.50	63.24
B Dia.	5.62	6.62	8.00	9.12	11.50	15.75	20.00	23.62	28.00	32.75	35.50	53.16
C Max.	5.50	6.50	7.56	8.19	10.62	13.38	16.00	17.12	20.88	24.19	25.00	43.93
D Screwed	3.25	4.75	5.50	6.25	—	—	—	—	—	—	—	—
DD 150 ANSI	4.00*	4.75	5.50	6.00	7.50	10.00	12.75	14.88	17.00	19.50	20.81	—
DDD 300 ANSI	4.25*	5.00	5.88	6.38	7.88	10.50	13.25	15.56	17.75	20.25	21.62	—
E	1.12	1.50	1.69	2.06	3.19	4.31	5.31	9.25	10.75	12.62	15.50	17.75
F 150 ANSI	2.50	3.00	3.50	3.75	4.50	5.50	6.75	8.00	9.50	10.50	11.75	19.25
FF 300 ANSI	3.06	3.25	3.75	4.13	5.00	6.25	7.50	8.75	10.25	11.50	12.75	—
G Screwed	1.88	3.25	4.00	4.50	—	—	—	—	—	—	—	—
GG 150 ANSI	4.00*	3.25	4.00	4.00	5.00	6.00	8.00	8.62	13.75	14.88	15.69	—
GGG 300 ANSI	4.25*	3.50	4.31	4.38	5.31	6.50	8.50	9.31	14.50	15.62	16.50	—
H NPT Body Tapping	⅜	⅜	½	½	¾	¾	1	1	1	1	1	1
J NPT Cover Center Plug	¼	½	½	½	¾	¾	1	1	1 ¼	1 ½	2	1½
K NPT Cover Tapping	⅜	⅜	½	½	¾	¾	1	1	1	1	1	1
Valve Stem Internal Thread UNF	10-32	10-32	10-32	¼-28	¼-28	⅜-24	⅜-24	⅜-24	⅜-24	⅜-24	½-20	3/4-16
Stem Travel	0.4	0.6	0.7	0.8	1.1	1.7	2.3	2.8	3.4	4.0	4.5	6.50
Approx. Ship Wt. Lbs.	15	35	50	70	140	285	500	780	1165	1600	2265	6200

Model 690-01 (Uses Basic Valve Model 100-20)

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class		
		Flanged		
Grade	Material	ANSI Standards*	150 lb.	300 lb.
ASTM A536	Ductile Iron	B16.42	250	400
ASTM A216-WCB	Cast Steel	B16.5	285	400
ASTM B62	Bronze	B16.24	225	400
ASTM A743	Stainless Steel	B16.5	285	400
356-T6	Aluminum	B16.1	275	—

Note: *ANSI standards are for flange dimensions only.
Flanged valves are available faced but not drilled.



3" Globe, Flanged



6" Globe, Flanged




6" Angle, Flanged


Materials

Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	3"-30"	3"-30"	3"-16"	3"-16"	3"-16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						
Stem, Nut & Spring	Stainless Steel						

Dimensions (In inches)

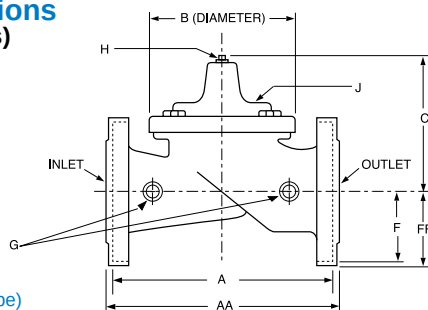

100-20 (Globe)



100-20 (Angle)

Model 690-01 Dimensions (In inches)

VALVE SIZE (Inches)	3	4	6	8	10	12	14	16	18	20	24	30
A 150 ANSI	10.25	13.88	17.75	21.38	26.00	30.00	34.25	35.00	42.12	48.00	48.00	63.25
AA 300 ANSI	11.00	14.50	18.62	22.38	27.38	31.50	—	36.62	43.63	49.62	49.75	—
B DIA.	6.62	9.12	11.50	15.75	20.00	23.62	28.00	28.00	35.44	35.44	35.44	53.19
C MAX.	7.00	8.62	11.62	15.00	17.88	21.00	20.88	25.75	25.00	31.00	31.00	43.94
D 150 ANSI	—	6.94	8.88	10.69	—	—	—	—	—	—	—	—
DD 300 ANSI	—	7.25	9.38	11.19	—	—	—	—	—	—	—	—
E 150 ANSI	—	5.50	6.75	7.25	—	—	—	—	—	—	—	—
EE 300 ANSI	—	5.81	7.25	7.75	—	—	—	—	—	—	—	—
F 150 ANSI	3.75	4.50	5.50	6.75	8.00	9.50	11.00	11.75	15.88	14.56	17.00	19.88
FF 300 ANSI	4.12	5.00	6.25	7.50	8.75	10.25	—	12.75	15.88	16.06	19.00	—
G NPT Body Tapping	3/8	1/2	3/4	3/4	1	1	1	1	1	1	1	1
H NPT Cover Center Plug	1/2	1/2	3/4	3/4	1	1	1 1/4	1 1/4	2	2	2	2
J NPT Cover Tapping	3/8	1/2	3/4	3/4	1	1	1	1	1	1	1	1
Valve Stem Internal Thread UNF	10-32	1/4-28	1/4-28	3/8-24	3/8-24	3/8-24	3/8-24	3/8-24	1/2-20	1/2-20	1/2-20	3/4-16
Stem Travel	0.6	0.8	1.1	1.7	2.3	2.8	3.4	3.4	4.5	4.5	4.5	6.5
Approx Ship Wt. Lbs.	45	85	195	330	625	900	1250	1380	2733	2551	2733	6500

Valve Selection

Valve Selection		These Symbols  and  Indicate Available Sizes																	
		Inches	1 1/4	1 1/2	2	2 1/2	3	4	6	8	10	12	14	16	18	20	24	30	
		mm	32	40	50	65	80	100	150	200	250	300	350	400	450	500	600	750	
		End Detail	Screwed	Screwed & Flanged					Flanged										
Model 90-01	Basic Valve 100-01	Globe																	
		Angle																	
	Suggested Flow (GPM)	Max. Continuous	93	125	210	300	460	800	1800	3100	4900	7000	8400	11000			25000		
		Max. Intermittent	120	160	260	370	580	990	2250	3900	6150	8720	10540	13700			31300		
		Min. Continuous	10	10	15	20	30	50	115	200	300	400	500	650			1750		
	Suggested Flow (Liters/sec)	Max. Continuous	6	8	13	19	29	50	113	195	309	441	529	693			1575		
		Max. Intermittent	7.6	10.1	16.4	23	37	62	142	246	387	549	664	863			1972		
		Min. Continuous	.6	.6	.9	1.3	1.9	3.2	7.2	13	19	25	32	41			110		
Model 690-01	Basic Valve 100-20	Globe					 **												
		Angle																	
	Suggested Flow (GPM)	Max.Continuous					260	580	1025	2300	4100	6400	9230	9230	16500	16500	16500	28000	
		Min. Continuous					15	30	50	115	200	300	500	500	900	900	900	1850	
	Suggested Flow (Liters/sec)	Max.Continuous					16	37	65	145	258	403	581	581	1040	1040	1040	1764	
		Min. Continuous					.9	1.9	3.2	7.2	13	19	32	32	57	57	57	117	

* 690-01 is the reduced internal port size version of the 90-01.

For 100-01 basic valves suggested flow calculations were based on flow through Schedule 40 Pipe. Maximum continuous flow is approx. 20 ft/sec (6.1 meters/sec) & maximum intermittent is approx. 25 ft/sec (7.6 meters/sec) and minimum continuous flow is approx. 1 ft/sec (.3 meters/sec). For 100-20 basic valves suggested flow calculations were based on flow through the valve seat. Approx. 26 ft/sec (7.9 meters/sec) was used for maximum continuous flow & 1 ft/sec (.3 meters/sec) is used for minimum continuous flow. Maximum continuous flow through the valve seat for the 30" 100-20 is approx. 20 ft/sec (6.1 meters/sec).



Many factors should be considered in sizing pressure reducing valves including inlet pressure, outlet pressure and flow rates. For sizing questions or cavitation analysis, consult Cla-Val with system details.

**Flanged End Detail Only

Pilot System Dimensions (In Inches)

We recommend providing adequate space around valve for maintenance work

Valve Size	1 1/4" & 1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	30"
X Max.	11.50	12.50	12.75	13.00	13.25	15.75	17.25	20.25	21.75	25.00	27.25	27.25	27.25	50.00	50.00
Y Max.	4.00	4.00	4.50	5.00	6.00	8.00	10.25	12.00	14.25	16.75	18.00	18.00	18.00	30.00	30.00
Z Max.	6.50	6.50	7.00	8.00	9.00	9.50	11.50	12.50	14.50	16.75	18.00	18.00	18.00	30.00	30.00

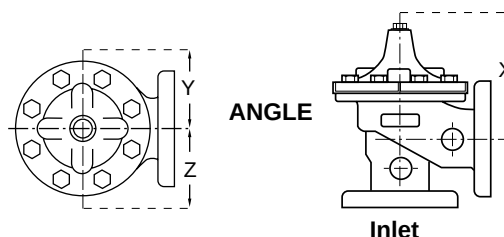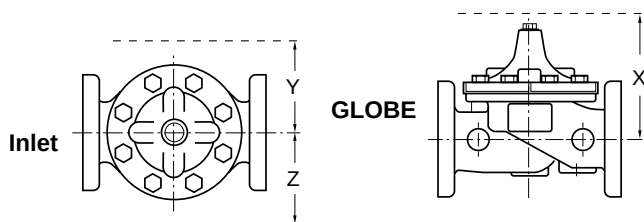

Pilot System Specifications

Adjustment Ranges

2 to 30 psi
15 to 75 psi
30 to 300 psi*

*Supplied unless otherwise specified

Other ranges available, please consult factory

Temperature Range

Water: to 180°F

Materials

Standard Pilot System Materials

Pilot Control: Bronze ASTM B62
Trim: Stainless Steel Type 303
Rubber: Buna-N® Synthetic Rubber

Optional Pilot System Materials

Pilot Systems are available with optional Aluminum, Stainless Steel or Monel materials at extra cost.

Note: Available with remote sensing control.

When Ordering, Please Specify

1. Catalog No. 90-01 or No. 690-01
2. Valve Size
3. Pattern - Globe or Angle
4. Pressure Class
5. Screwed or Flanged
6. Trim Material
7. Adjustment Range
8. Desired Options
9. When Vertically Installed



E-90-01/690-01 (R-11/01)

CLA-VAL

PO Box 1325 Newport Beach CA 92659-0325
Phone: 949-722-4800 • Fax: 949-548-5441

CLA-VAL CANADA, LTD.

4687 Christie Drive
Beamsville, Ontario
Canada LOR 1B4
Phone: 905-563-4963
Fax: 905-563-4040

©COPYRIGHT CLA-VAL 2001 Printed in USA
Specifications subject to change without notice.

CLA-VAL SA

Chemin des Mesanges 1
CH-1032 Romanel/
Lausanne, Switzerland
Phone: 41-21-643-15-55
Fax: 41-21-643-15-50

www.cla-val.com

Represented By: