


Combination Back Pressure & Solenoid Shut-off Valve

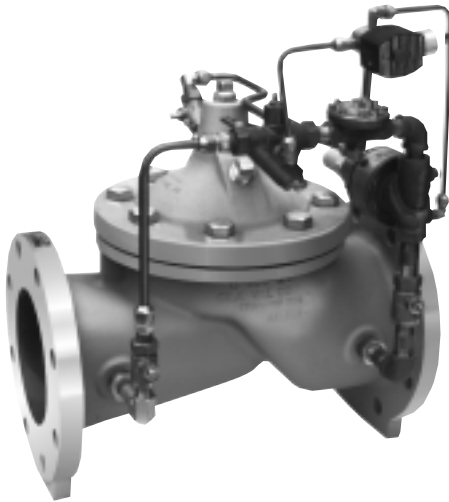

- Accurate Pressure Control
- Wide Adjustment Ranges
- Optional Check Feature Available
- Quick Acting Solenoid Shutoff
- Easy Installation and Maintenance

The Cla-Val Model 58-01/658-01 valve performs two separate functions. It maintains a constant back pressure by discharging excess pressure downstream and when the solenoid is activated the valve closes drip tight.

In operation, the valve is actuated by hydraulic line pressure through the pilot control system. When inlet pressure is greater than the control setting, the valve opens. When inlet pressure is equal to the control setting, the pilot modulates the valve maintaining the pre-selected back pressure. When inlet pressure is less than the control setting, the pilot system closes the valve drip tight. Changing the pressure setting simply involves turning an adjusting screw on the pilot control.


The solenoid control is available in energize to open or de-energize to open models.

Schematic Diagram

Item	Description
1	Hytrol (Main Valve)
2	X42N-3 Strainer & Needle Valve
3	CRL Pressure Relief Control
4	CS3 Solenoid Control
5	100-01 Hytrol (Reverse Flow)


Optional Features

Item	Description
B	Shutoff Cocks - Isolates Pilot System
D	Check Valves with Cock
F	Remote Pilot Sensing
H	Drain to Atmosphere
S	CV Speed Control (Opening)

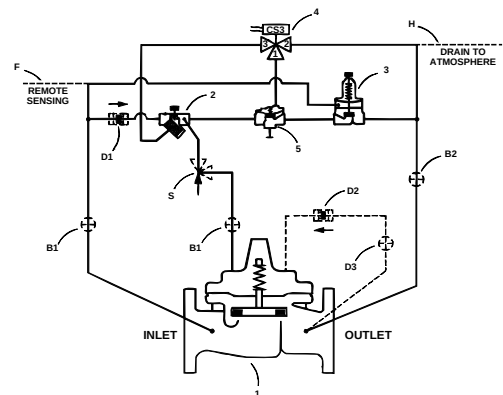


The "D" feature on a vertically installed 6" and larger valve must be horizontally oriented.

Typical Applications

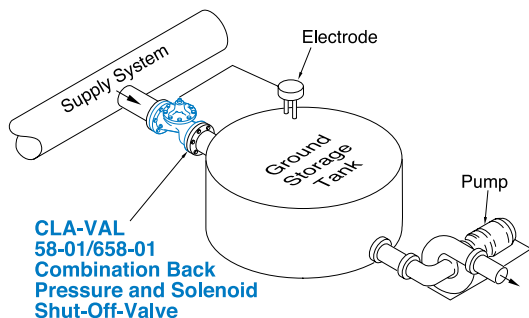

Back Pressure Maintenance Service

A frequent application of this valve is to maintain minimum back pressure in the system while supplying water to a reservoir. The electrode in the storage tank activates the solenoid shutoff feature when the tank reaches a pre-set level.

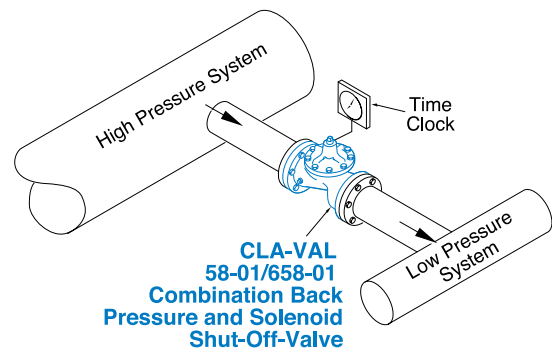

Electronic Control Service

Using a timer connected to the solenoid control of the valve, flow from the high pressure system to the low pressure system can be controlled at certain times during the day.

Model 58-01 (Uses Basic Valve Model 100-01)

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class			
		Flanged			Screwed
Grade	Material	ANSI Standards*	150 lb.	300 lb.	End** Details
ASTM A536	Ductile Iron	B16.42	250	400	400
ASTM A216-WCB	Cast Steel	B16.5	285	400	400
ASTM B62	Bronze	B16.24	225	400	400
ASTM A743	Stainless Steel	B16.5	285	400	400
356-T6	Aluminum	B16.1	275	—	—

Note: *ANSI standards are for flange dimensions only.
Flanged valves are available faced but not drilled.
** End Details machined to ANSI B2.1 specifications.

Cover Capacity

Liquid Volume Displaced from Diaphragm Chamber When Valve Opens			
Valve Size	Displacement	Valve Size	Displacement
1 - ¼"	.020 gal	8"	1.26 gal
1 - ½"	.020 gal	10"	2.51 gal
2"	.032 gal	12"	4.00 gal
2 - ½"	.043 gal	14"	6.50 gal
3"	.080 gal	16"	9.57 gal
4"	.169 gal	24"	29.00 gal
6"	.531 gal		

Materials

Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	1¼" - 16", 24"	1¼" - 16", 24"	1¼" - 16"	1¼" - 16"	1¼" - 16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						
Stem, Nut & Spring	Stainless Steel						




2" Globe, Screwed




4" Angle, Flanged

100-01 (Globe)

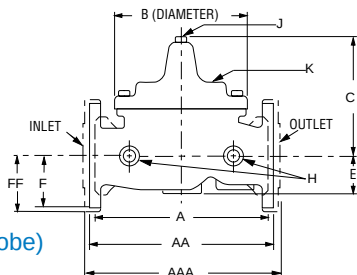

100-01 (Angle)



Model 58-01 Dimensions (In Inches)

*1½" Size Only

Valve Size (Inches)	1½-1½	2	2 ½	3	4	6	8	10	12	14	16	24
A Screwed	7.25	9.38	11.00	12.50	—	—	—	—	—	—	—	—
AA 150 ANSI	8.50*	9.38	11.00	12.00	15.00	20.00	25.38	29.75	34.00	39.00	41.38	61.50
AAA 300 ANSI	9.00*	10.00	11.62	13.25	15.62	21.00	26.38	31.12	35.50	40.50	43.50	63.24
B Dia.	5.62	6.62	8.00	9.12	11.50	15.75	20.00	23.62	28.00	32.75	35.50	53.16
C Max.	5.50	6.50	7.56	8.19	10.62	13.38	16.00	17.12	20.88	24.19	25.00	43.93
D Screwed	3.25	4.75	5.50	6.25	—	—	—	—	—	—	—	—
DD 150 ANSI	4.00*	4.75	5.50	6.00	7.50	10.00	12.75	14.88	17.00	19.50	20.69	—
DDD 300 ANSI	4.25*	5.00	5.88	6.38	7.88	10.50	13.25	15.56	17.75	20.25	21.62	—
E	1.12	1.50	1.69	2.06	3.19	4.31	5.31	9.25	10.75	12.62	15.50	17.75
F 150 ANSI	2.50	3.00	3.50	3.75	4.50	5.50	6.75	8.00	9.50	10.50	11.75	19.25
FF 300 ANSI	3.06	3.25	3.75	4.13	5.00	6.25	7.50	8.75	10.25	11.50	12.75	—
G Screwed	1.88	3.25	4.00	4.50	—	—	—	—	—	—	—	—
GG 150 ANSI	4.00*	3.25	4.00	4.00	5.00	6.00	8.00	8.62	13.75	14.88	15.69	—
GGG 300 ANSI	4.25*	3.50	4.31	4.38	5.31	6.50	8.50	9.31	14.50	15.62	16.50	—
H NPT Body Tapping	¾	¾	½	½	¾	¾	1	1	1	1	1	1
J NPT Cover Center Plug	¼	½	½	½	¾	¾	1	1	1 ¼	1 ½	2	1 ½
K NPT Cover Tapping	¾	¾	½	½	¾	¾	1	1	1	1	1	1-½
Valve Stem Internal Thread UNF	10-32	10-32	10-32	¼-28	¼-28	¾-24	¾-24	¾-24	¾-24	¾-24	½-20	¾-16
Stem Travel	0.4	0.6	0.7	0.8	1.1	1.7	2.3	2.8	3.4	4.0	4.5	6.50
Approx. Ship Wt. Lbs.	15	35	50	70	140	285	500	780	1165	1600	2265	6200

Model 658-01 (Uses Basic Valve Model 100-20)

Pressure Ratings (Recommended Maximum Pressure - psi)

Valve Body & Cover		Pressure Class		
		Flanged		
Grade	Material	ANSI Standards*	150 lb.	300 lb.
ASTM A536	Ductile Iron	B16.42	250	400
ASTM A216-WCB	Cast Steel	B16.5	285	400
ASTM B62	Bronze	B16.24	225	400
ASTM A743	Stainless Steel	B16.5	285	400
356-T6	Aluminum	B16.1	275	—

Note: *ANSI standards are for flange dimensions only.
Flanged valves are available faced but not drilled.

Cover Capacity



Liquid Volume Displaced from Diaphragm Chamber When Valve Opens			
Valve Size	Displacement	Valve Size	Displacement
3"	.032 gal	12"	2.51 gal
4"	.080 gal	16"	4.00 gal
6"	.169 gal	20"	9.57 gal
8"	.531 gal	24"	9.57 gal
10"	1.26 gal		

Materials

Component	Material Options						
Body & Cover	Ductile Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Available Sizes	3"-30"	3"-30"	3"-16"	3"-16"	3"-16"		
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze	Stainless Steel	Aluminum		
Trim: Disc Guide, Seat & Cover Bearing	Bronze is standard. Stainless Steel is optional.			Stainless Steel is standard.			
Disc	Buna-N® Rubber						
Diaphragm	Nylon Reinforced Buna-N® Rubber						
Stem, Nut & Spring	Stainless Steel						



3" Globe, Flanged

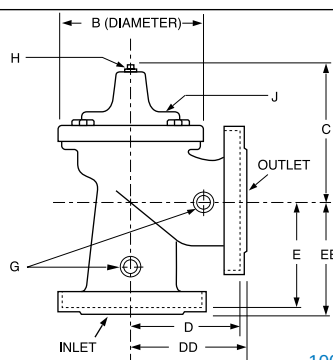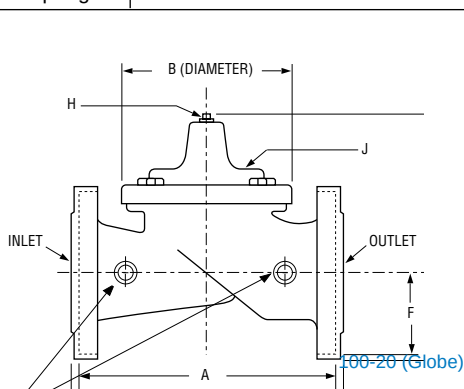

100-20 (Angle)



6" Angle, Flanged

Model 658-01 Dimensions (In inches)

VALVE SIZE (Inches)	3	4	6	8	10	12	14	16	18	20	24	30
A 150 ANSI	10.25	13.88	17.75	21.38	26.00	30.00	34.25	35.00	42.12	48.00	48.00	63.25
AA 300 ANSI	11.00	14.50	18.62	22.38	27.38	31.50	—	36.62	43.63	49.62	49.75	—
B DIA.	6.62	9.12	11.50	15.75	20.00	23.62	28.00	28.00	35.44	35.44	35.44	53.19
C MAX.	7.00	8.62	11.62	15.00	17.88	21.00	20.88	25.75	25.00	31.00	31.00	43.94
D 150 ANSI	—	6.94	8.88	10.69	—	—	—	—	—	—	—	—
DD 300 ANSI	—	7.25	9.38	11.19	—	—	—	—	—	—	—	—
E 150 ANSI	—	5.50	6.75	7.25	—	—	—	—	—	—	—	—
EE 300 ANSI	—	5.81	7.25	7.75	—	—	—	—	—	—	—	—
F 150 ANSI	3.75	4.50	5.50	6.75	8.00	9.50	11.00	11.75	15.88	14.56	17.00	19.88
FF 300 ANSI	4.12	5.00	6.25	7.50	8.75	10.25	—	12.75	15.88	16.06	19.00	—
G NPT Body Tapping	3/8	1/2	3/4	3/4	1	1	1	1	1	1	1	1
H NPT Cover Center Plug	1/2	1/2	3/4	3/4	1	1	1 1/4	1 1/4	2	2	2	2
J NPT Cover Tapping	3/8	1/2	3/4	3/4	1	1	1	1	1	1	1	1
Valve Stem Internal Thread UNF	10-32	1/4-28	1/4-28	3/8-24	3/8-24	3/8-24	3/8-24	3/8-24	1/2-20	1/2-20	1/2-20	3/4-16
Stem Travel	0.6	0.8	1.1	1.7	2.3	2.8	3.4	3.4	4.5	4.5	4.5	6.5
Approx Ship Wt. Lbs.	45	85	195	330	625	900	1250	1380	2733	2551	2733	6500

Valve Selection

Valve Selection		These Symbols  and  Indicate Available Sizes																
		Inches	1 1/4	1 1/2	2	2 1/2	3	4	6	8	10	12	14	16	18	20	24	30
		mm	32	40	50	65	80	100	150	200	250	300	350	400	450	500	600	750
		End Detail	Screwed	Screwed & Flanged					Flanged									
Model 58-01	Basic Valve 100-01	Globe																
		Angle																
	Suggested Flow (GPM)	Max. Continuous	93	125	210	300	460	800	1800	3100	4900	7000	8400	11000			25000	
		Max. Surge	120	280	470	670	1000	1800	4000	7000	11000	16000	19000	25000			56500	
	Suggested Flow (Liters/sec)	Max. Continuous	6	8	13	19	29	50	113	195	309	441	529	693			1575	
		Max. Surge	13	18	30	42	63	113	252	441	693	1008	1197	1575			3560	
Model 658-01	Basic Valve 100-20	Globe																
		Angle																
	Suggested Flow (GPM)	Max. Continuous					260	580	1025	2300	4100	6400	9230	9230	16500	16500	16500	28000
		Max. Surge					440	990	1760	3970	7050	11000	15900	15900	28200	28200	28200	56500
	Suggested Flow (Liters/sec)	Max. Continuous					16	37	65	145	258	403	581	581	1040	1040	1040	1764
		Max. Surge					28	62	111	250	444	693	1002	1002	1777	1777	1777	3560


* 658-01 is the reduced internal port size version of the 58-01.

For 100-01 basic valves suggested flow calculations were based on flow through Schedule 40 Pipe. Maximum continuous flow is approx. 20 ft/sec (6.1 meters/sec) & maximum surge is approx. 45 ft/sec (13.7 meters/sec). For 100-20 basic valves suggested flow calculations were based on flow through the valve seat. Approx. 26 ft/sec (7.9 meters/sec) is used for continuous flow & 45 ft/sec (13.7 meters/sec) is used for surge flow. Maximum continuous flow through the valve seat for the 30" 100-20 is approx. 20 ft/sec (6.1 meters/sec). **Flanged End Detail Only


Pilot System Dimensions (In Inches)

We recommend providing adequate space around valve for maintenance work


Valve Size	1 1/4" & 1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	30"
X Max.	16.00	16.25	16.75	17.00	17.50	17.75	19.75	22.00	25.75	29.00	31.00	31.00	34.00	50.00	50.00
Y Max.	6.00	6.00	6.50	8.00	8.50	9.00	11.25	13.00	14.55	16.75	18.00	18.00	18.00	30.00	30.00
Z Max.	4.00	4.00	4.50	5.00	6.00	8.00	10.25	12.00	14.25	16.75	18.00	18.00	18.00	30.00	30.00



GLOBE



ANGLE



Inlet

Pilot System Specifications

Adjustment Ranges

0 to 75 psi
20 to 200 psi*
100 to 300 psi

*Supplied unless otherwise specified
Other ranges available, please consult factory

Temperature Range

Water: to 180°F

Electrical Ratings:

Voltage:
24, 48, 120, 240, 480 – 60 Hz. VAC
6, 12, 24, 120, 240 VDC

Materials

Standard Pilot System Materials

Pilot Control: Bronze ASTM B62
Trim: Stainless Steel Type 303
Rubber: Buna-N® Synthetic Rubber
Tubing & Fittings: Copper and Bronze

Optional Pilot System Materials

Pilot Systems are available with optional
Aluminum, Stainless Steel or Monel
materials at extra cost.

When Ordering, Please Specify

1. Catalog No. 58-01 or No. 658-01
2. Valve Size
3. Pattern - Globe or Angle
4. Pressure Class
5. Screwed or Flanged
6. Trim Material
7. Energized or De-energized to Open Main Valve
8. Adjustment Range
9. Desired Options
10. Electrical Selection
11. When Vertically Installed



E-58-01/658-01 (R-11/01)

CLA-VAL

PO Box 1325 Newport Beach CA 92659-0325
Phone: 949-722-4800 • Fax: 949-548-5441

CLA-VAL CANADA, LTD.

4687 Christie Drive
Beamsville, Ontario
Canada LOR 1B4
Phone: 905-563-4963
Fax: 905-563-4040

© COPYRIGHT CLA-VAL 2001 Printed in USA
Specifications subject to change without notice.

CLA-VAL SA

Chemin des Mesanges 1
CH-1032 Romanel/
Lausanne, Switzerland
Phone: 41-21-643-15-55
Fax: 41-21-643-15-50

www.cla-val.com

Represented By: