



KwikTap

TOOL-LESS SADDLE TEE

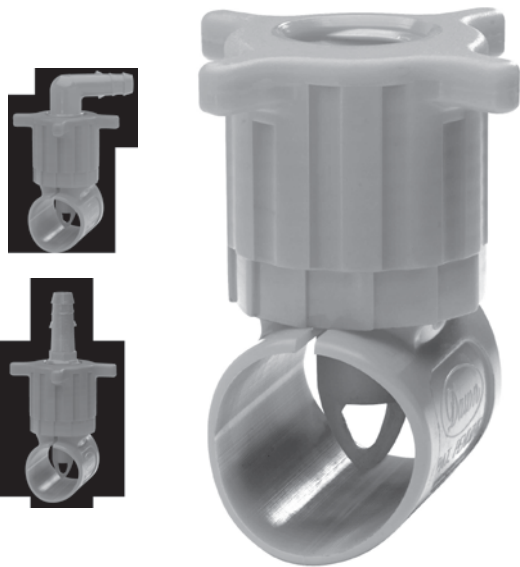


INSTALLATION INSTRUCTIONS


INSTRUCCIONES DE INSTALACION



Simply snap saddle onto the pipe.
Ponga la abrazadera en la manguera.



While holding saddle in position, screw the tap onto the ratcheting lock until it can no longer turn.
Mientras sostiene la montura en posición. Enrosque la tapa hasta que ya no de vuelta.




Part Numbers	Description			Bag/Box Quantity
KT007C	3/4" PE	X	1/2" FPT	10/200
KT007D	3/4" PE	X	3/4" FPT	10/200
KT010C	1" PE	X	1/2" FPT	10/200
KT010D	1" PE	X	3/4" FPT	10/200
KT012C	1 1/4" PE	X	1/2" FPT	10/200
KT012D	1 1/4" PE	X	3/4" FPT	10/200
KT015C	1 1/2" PE	X	1/2" FPT	10/200
KT015D	1 1/2" PE	X	3/4" FPT	10/200
KT025C	25mm PE	X	1/2" FPT	10/200
KT025D	25mm PE	X	3/4" FPT	10/200
KT032C	32mm PE	X	1/2" FPT	10/200
KT032D	32mm PE	X	3/4" FPT	10/200
Elbows				
KT007SW-E	3/4" PE	X	Swing Elbow	10/200
KT010SW-E	1" PE	X	Swing Elbow	10/200
KT012SW-E	1 1/4" PE	X	Swing Elbow	10/200
KT015SW-E	1 1/2" PE	X	Swing Elbow	10/200
KT025SW-E	25mm PE	X	Swing Elbow	10/200
KT032SW-E	32mm PE	X	Swing Elbow	10/200
Straights				
KT007SW-S	3/4" PE	X	Swing Straight	10/200
KT010SW-S	1" PE	X	Swing Straight	10/200
KT012SW-S	1 1/4" PE	X	Swing Straight	10/200
KT015SW-S	1 1/2" PE	X	Swing Straight	10/200
KT025SW-S	25mm PE	X	Swing Straight	10/200
KT032SW-S	32mm PE	X	Swing Straight	10/200

Specifications

	H		W		L
KT007 C & D	2.0"	X	2.5"	X	2.75"
KT010 C & D	2.0"	X	2.5"	X	3.0"
KT012 C & D	2.5"	X	2.5"	X	3.25"
KT015 C & D	2.5"	X	2.5"	X	3.5"
KT025 C & D	2.0"	X	2.5"	X	2.75"
KT032 C & D	2.0"	X	2.5"	X	3.0"

Measurements

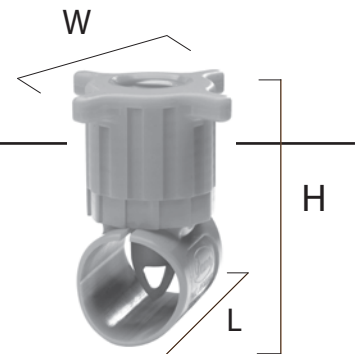

Material	Top: Reinforced Nylon Bottom: ABS	
Lab Tests	Flow Restriction: 392 psi @ 62 seconds Quick Burst: 41% less than standard insert tee	Flow Rate: 13.6 gmp @ 40 psi Rated: 400 psi
Piping Application	Designed for 80#, 100# HDPE or MDPE Pipe on outdoor irrigation	
Configurations	Pre-installed swing connections-straight or elbow	
Install Tools Needed	No Tools Needed	
Manufactured In	USA	



www.dawnindustries.com