



NEW



Page 4

401



Page 5

CADDY® SLOT LOCK



Page 6

410



Page 7

402



Page 8

420



Page 9

401RO




Page 10

403



Page 11

405

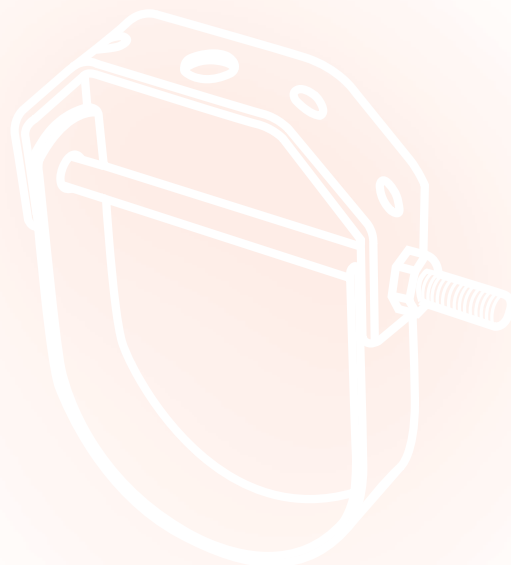



CLEVIS HANGER 401


Standard Duty

- Size Range: 1/2" through 24"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary non-insulated pipe lines
- Standard electro-zinc plated finish is cleaner, provides superior corrosion protection
- Conforms with Federal Specification WW-H-171 (Type 1), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 1)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
4010050EG	1/2 "	3/8	2-1/8 "	1-5/8 "	610
4010075EG	3/4 "	3/8	2-3/8 "	1-3/4 "	610
4010100EG	1 "	3/8	2-3/4 "	2-1/16 "	610
4010125EG	1-1/4 "	3/8	3-5/16 "	2-3/8 "	610
4010150EG	1-1/2 "	3/8	3-15/16 "	2-15/16 "	610
4010200EG	2 "	3/8	4-1/2 "	3-1/4 "	610
4010250EG	2-1/2 "	1/2	5-1/4 "	3-3/4 "	1130
4010300EG	3 "	1/2	6 "	4-1/8 "	1130
4010350EG	3-1/2 "	1/2	6-1/2 "	4-7/16 "	1130
4010400EG	4 "	5/8	7-3/4 "	5-3/8 "	1130
4010500EG	5 "	5/8	9-3/4 "	6-13/16 "	1430
4010600EG	6 "	3/4	11-3/4 "	8-1/4 "	1940
4010800EG	8 "	3/4	14 "	9-1/2 "	2000
4011000EG	10 "	7/8	16-1/2 "	10-7/8 "	3600
4011200EG	12 "	7/8	18-5/8 "	12 "	3800
4011400EG	14 "	1	21-3/4 "	14-1/2 "	4200
4011600EG	16 "	1	24 "	15-3/4 "	4600
4011800EG	18 "	1-1/8	26-3/4 "	17-1/2 "	4800
4012000EG	20 "	1-1/4	30 "	19-5/8 "	4800
4012400EG	24 "	1-1/4	34-1/8 "	21-3/4 "	4800

2-1/2" - 8"





CADDY® SLOT LOCK



Standard Duty

- Size Range: 2" and 4"
- Surface Finish: Electro-zinc plated
- Slotted crossbeam design is easier to assemble than conventional nut and bolt style clevis hangers
- Eliminates the need to install additional parts to control deflection
- Recommended for the suspension of stationary non-insulated pipe lines
- Standard electro-zinc plated finish is cleaner, provides superior corrosion protection
- Conforms with Federal Specification WW-H-171 (Type 1), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 1)



Patent Pending

Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
4270200EG	2"	3/8	4-11/16"	3-3/8"	610
4270400EG	4"	5/8	7-3/4"	5-3/8"	1130

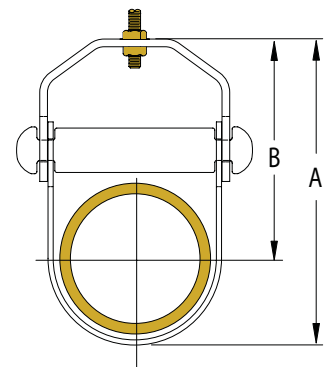

Features

- UL® Listed and FM approved
- Each assembly comes individually bagged, ready to assemble
- Patent-pending slotted crossbeam design is easier and faster to assemble than conventional nut and bolt style hangers
- Notches in the crossbeam capture the top and bottom legs under load, minimizing deflection
- Meets FM deflection requirements without the need to install additional parts
- Has successfully passed the rigorous vibration testing requirements for both UL and FM



"The CADDY® SLOT LOCK Hanger is UL Listed under UL 203 for fire protection applications"



CLEVIS HANGER 410


Light Duty

- Size Range: 1/2" through 8"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of light stationary non-insulated pipe or conduit lines
- Conforms with Federal Specification WW-H-171 (Type 1), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 1)
- Standard electro-zinc plated finish is cleaner, provides superior corrosion protection



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
4100050EG	1/2 "	3/8	2-1/8 "	1-5/8 "	150
4100075EG	3/4 "	3/8	2-3/8 "	1-3/4 "	150
4100100EG	1 "	3/8	2-3/4 "	2-1/16 "	250
4100125EG	1-1/4 "	3/8	3-5/16 "	2-3/8 "	250
4100150EG	1-1/2 "	3/8	4 "	2-15/16 "	250
4100200EG	2 "	3/8	4-1/2 "	3-3/16 "	250
4100250EG	2-1/2 "	1/2	5-1/4 "	3-11/16 "	350
4100300EG	3 "	1/2	6 "	4-3/16 "	350
4100350EG	3-1/2 "	1/2	6-1/2 "	4-3/8 "	400
4100400EG	4 "	5/8	7-3/4 "	5-3/8 "	500
4100500EG	5 "	5/8	9-3/4 "	6-13/16 "	600
4100600EG	6 "	3/4	11-3/4 "	8-1/4 "	800
4100800EG	8 "	3/4	14 "	9-1/2 "	1200

3/4" - 8"






CLEVIS HANGER 402

Light Duty for Copper Tubing

- Size Range: 1/2" through 8"
- Surface Finish: Copper-colored coating (for identification purposes only)
- Recommended for the suspension of stationary non-insulated copper tubing lines
- Conforms with Federal Specification WW-H-171 (Type 12), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 1)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
4020050CP	1/2 "	3/8	2-1/16"	1-11/16"	215
4020075CP	3/4 "	3/8	2-5/16"	1-13/16"	215
4020100CP	1 "	3/8	3 "	2-3/8"	215
4020125CP	1-1/4 "	3/8	2-3/4"	2 "	215
4020150CP	1-1/2 "	3/8	3-5/16"	2-7/16"	215
4020200CP	2 "	3/8	4-1/16"	2-7/8"	215
4020250CP	2-1/2 "	1/2	4-13/16"	3-5/16"	250
4020300CP	3 "	1/2	5-1/2"	3-3/4"	300
4020350CP	3-1/2 "	1/2	6-1/8"	4-1/8"	360
4020400CP	4 "	1/2	6-3/4"	4-1/2"	440
4020500CP	5 "	1/2	9-1/8"	6-3/8"	600
4020600CP	6 "	5/8	11-1/16"	7-7/8"	760
4020800CP	8 "	3/4	14-7/8"	10-9/16"	1160





CLEVIS HANGER 420


Standard Duty Epoxy Coated

- Size Range: 1/2" through 8"
- Surface Finish: Epoxy Coated
- Recommended for the suspension of stationary non-insulated pipe lines where it is undesirable to have the steel of the hanger in direct contact with the pipe
- Conforms with Federal Specification WW-H-171 (Type 1), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 1)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
4200050EP	1/2 "	3/8	2-1/8 "	1-5/8 "	610
4200075EP	3/4 "	3/8	2-3/8 "	1-3/4 "	610
4200100EP	1 "	3/8	2-3/4 "	2-1/16 "	610
4200125EP	1-1/4 "	3/8	3-5/16 "	2-3/8 "	610
4200150EP	1-1/2 "	3/8	3-15/16 "	2-15/16 "	610
4200200EP	2 "	3/8	4-1/2 "	3-1/4 "	610
4200250EP	2-1/2 "	1/2	5-1/4 "	3-3/4 "	1130
4200300EP	3 "	1/2	6 "	4-1/8 "	1130
4200400EP	4 "	1/2	7-3/4 "	5-3/8 "	1130
4200500EP	5 "	1/2	9-3/4 "	6-13/16 "	1430
4200600EP	6 "	1/2	11-3/4 "	8-1/4 "	1940
4200800EP	8 "	1/2	14 "	9-1/2 "	2000

2-1/2" - 8"





CLEVIS HANGER 401RO


Standard Duty

- Size Range: 1/2" through 24"
- Surface Finish: Red-oxide primer coating
- Recommended for the suspension of stationary non-insulated pipe lines
- Conforms with Federal Specification WW-H-171 (Type 1), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 1)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
4010050RO	1/2 "	3/8	2-1/8 "	1-5/8 "	610
4010075RO	3/4 "	3/8	2-3/8 "	1-3/4 "	610
4010100RO	1 "	3/8	2-3/4 "	2-1/16 "	610
4010125RO	1-1/4 "	3/8	3-5/16 "	2-3/8 "	610
4010150RO	1-1/2 "	3/8	3-15/16 "	2-15/16 "	610
4010200RO	2 "	3/8	4-1/2 "	3-1/4 "	610
4010250RO	2-1/2 "	1/2	5-1/4 "	3-3/4 "	1130
4010300RO	3 "	1/2	6 "	4-1/8 "	1130
4010350RO	3-1/2 "	1/2	6-1/2 "	4-7/16 "	1130
4010400RO	4 "	5/8	7-3/4 "	5-3/8 "	1130
4010500RO	5 "	5/8	9-3/4 "	6-13/16 "	1430
4010600RO	6 "	3/4	11-3/4 "	8-1/4 "	1940
4010800RO	8 "	3/4	14 "	9-1/2 "	2000
4011000RO	10 "	7/8	16-1/2 "	10-7/8 "	3600
4011200RO	12 "	7/8	18-5/8 "	12 "	3800
4011400RO	14 "	1	21-3/4 "	14-1/2 "	4200
4011600RO	16 "	1	24 "	15-3/4 "	4600
4011800RO	18 "	1-1/8	26-3/4 "	17-1/2 "	4800
4012000RO	20 "	1-1/4	30 "	19-5/8 "	4800
4012400RO	24 "	1-1/4	34-1/8 "	21-3/4 "	4800

2-1/2" - 8"





CLEVIS HANGER 403


Standard Duty with Insulation Shield

- Size Range: 1-1/2" through 22"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary non-insulated pipe lines
- Conforms with Federal Specification WW-H-171 (Type 1), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 1)



NOTE: Please see page 262 for sizing chart

Part Number	Nominal Pipe Size	RS	A	B	C	Max. Rec. Load (lbs)
4030150EG	1-1/2"	3/8	5"	3-13/16"	3"	610
4030200EG	2"	3/8	5-5/16"	3-15/16"	3"	610
4030250EG	2-1/2"	1/2	6-3/16"	4-7/16"	4"	1130
4030300EG	3"	1/2	6-3/4"	4-11/16"	4"	1130
4030350EG	3-1/2"	1/2	7-1/4"	4-15/16"	4"	1130
4030400EG	4"	5/8	7-1/4"	4-11/16"	6"	1130
4030450EG	4-1/2"	5/8	9-9/16"	6-7/8"	6"	1430
4030500EG	5"	5/8	10"	6-15/16"	6"	1430
4030600EG	6"	3/4	11-1/16"	7-7/16"	6"	1940
4030700EG	7"	3/4	12-15/16"	8-7/8"	6"	1940
4030800EG	8"	3/4	13-13/16"	9-5/16"	6"	2000
4030900EG	9"	7/8	14-3/8"	8-7/8"	6"	2000
4031000EG	10"	7/8	16-5/16"	10-5/16"	6"	3600
4031100EG	11"	7/8	18-3/8"	11-7/8"	8"	3600
4031200EG	12"	7/8	19-5/8"	12-5/8"	8"	3800
4031400EG	14"	1	20-1/2"	13"	8"	4200
4031500EG	15"	1	20-5/8"	12-3/8"	8"	4200
4031600EG	16"	1	22-1/2"	14"	8"	4600
4031700EG	17"	1-1/8	23-3/4"	14-3/4"	10"	4600
4031800EG	18"	1-1/8	25-13/16"	16-3/4"	10"	4800
4031900EG	19"	1-1/4	27-1/2"	17-3/4"	10"	4800
4032000EG	20"	1-1/4	29"	18-3/8"	10"	4800
4032100EG	21"	1-1/4	29-1/4"	18-1/4"	10"	4800
4032200EG	22"	1-1/4	30-1/4"	18-5/8"	10"	4800



Flared edges
on shield sizes
thru 4 only





CLEVIS HANGER 405

Standard Duty AWWA Cast Iron Pipe

- Size Range: 3" through 14"
- Surface Finish: Black (Plain)
- Recommended for the suspension of stationary non-insulated cast iron pipe lines
- Conforms with Federal Specification WW-H-171 (Type 1), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 1)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
4050300PL	3 "	1/2	6-11/16"	4-1/2 "	1130
4050400PL	4 "	5/8	8-3/8"	5-11/16"	1430
4050600PL	6 "	3/4	10-5/8"	7"	1940
4050800PL	8 "	7/8	13-1/4"	8-3/8"	2000
4051000PL	10 "	7/8	15-7/8"	10-1/8"	3600
4051200PL	12 "	7/8	17-3/8"	10-1/8"	3800
4051400PL	14 "	1	21-5/8"	13-1/2 "	4200

