

SPECIFICATION SHEET MODEL 850



DOUBLE CHECK ASSEMBLY

Characteristics

Physical Properties

Size of Mainline	2½", 3, 4", 6", 8", 10"
Max. Working Pressure	175 PSI (1200 KPa)
Hydrostatic Test Press.	350 PSI (2400 KPa)
Temperature Range	32° F to 140° F (0° C to 60° C)
End Connections	Flanged ANSI B16.1 Class 125

Materials

Main Valve Body	Ductile iron Grade 65-45-12
Coating	Fusion epoxy coated internal and external, AWWA C550-90
Shut Off Valves	NRS resilient wedge gate valves AWWA C509
Trim	Bronze
Elastomer Discs	EPDM
Spring	Stainless steel
Clamp	AWWA 606


Application

Non-Health Hazard

Options

- ☐ UL/FM OS&Y RW Gate Valves
- ☐ Wye - Strainer

U.S. Patent No. 4,989,635

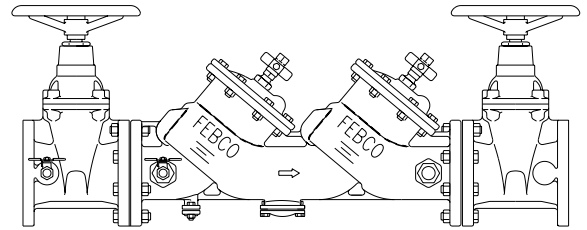





MODEL 850 DOUBLE CHECK ASSEMBLY

Agency Compliance

- Approved by the Foundation for Cross Connection Control and Hydraulic Research at the University of Southern California. - 2½" - 8" (Horizontal & Vertical Up)
- ASSE (Std. 1015) - 2½" - 8" (Horizontal & Vertical Up), 10" (Horizontal)
- ANSI/AWWA (C510-89) - 2½" - 8" (Horizontal & Vertical Up), 10" (Horizontal)
- CAN/CSA (B64.5) - 2½" - 8" (Horizontal & Vertical Up)
- cUL - 2½" - 8" (Horizontal & Vertical Up)
- FM Approved* - 2½" - 8" (Horizontal & Vertical Up)
- UL Listed* - 2½" - 8" (Horizontal & Vertical Up)

* Less gates not FM approved. Less gates not UL listed unless installed with UL listed gate valves.


Model 850 Flow Curves

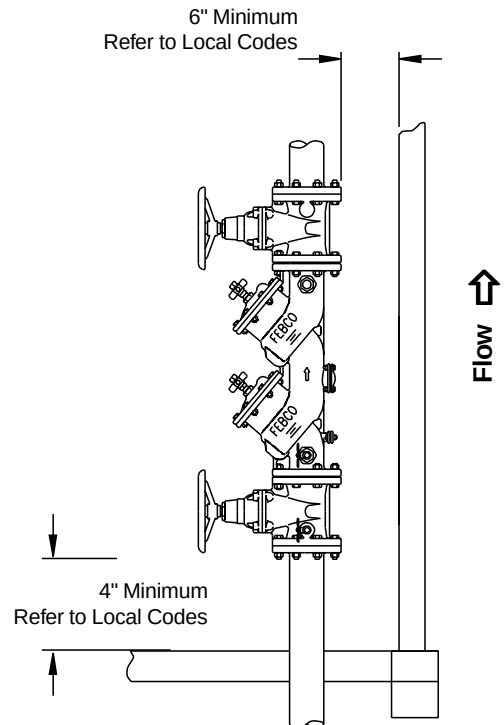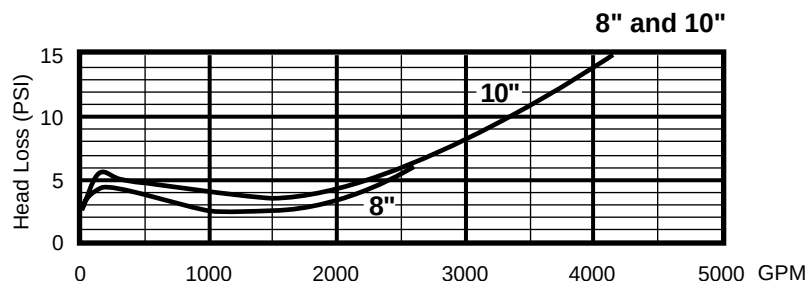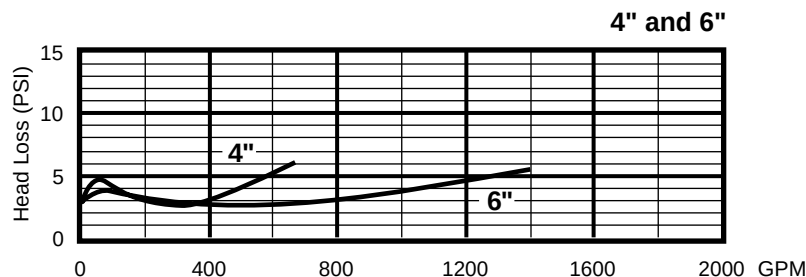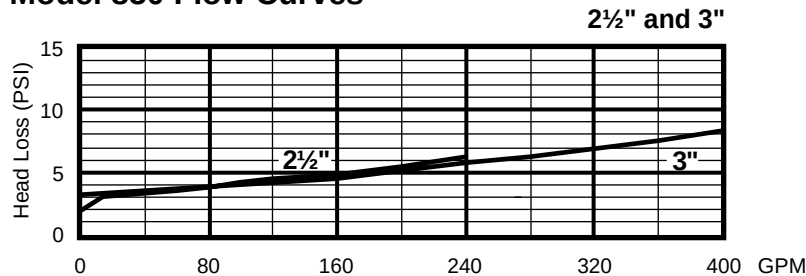

MODEL 850
VERTICAL INSTALLATION

MASTER
series

Model 850

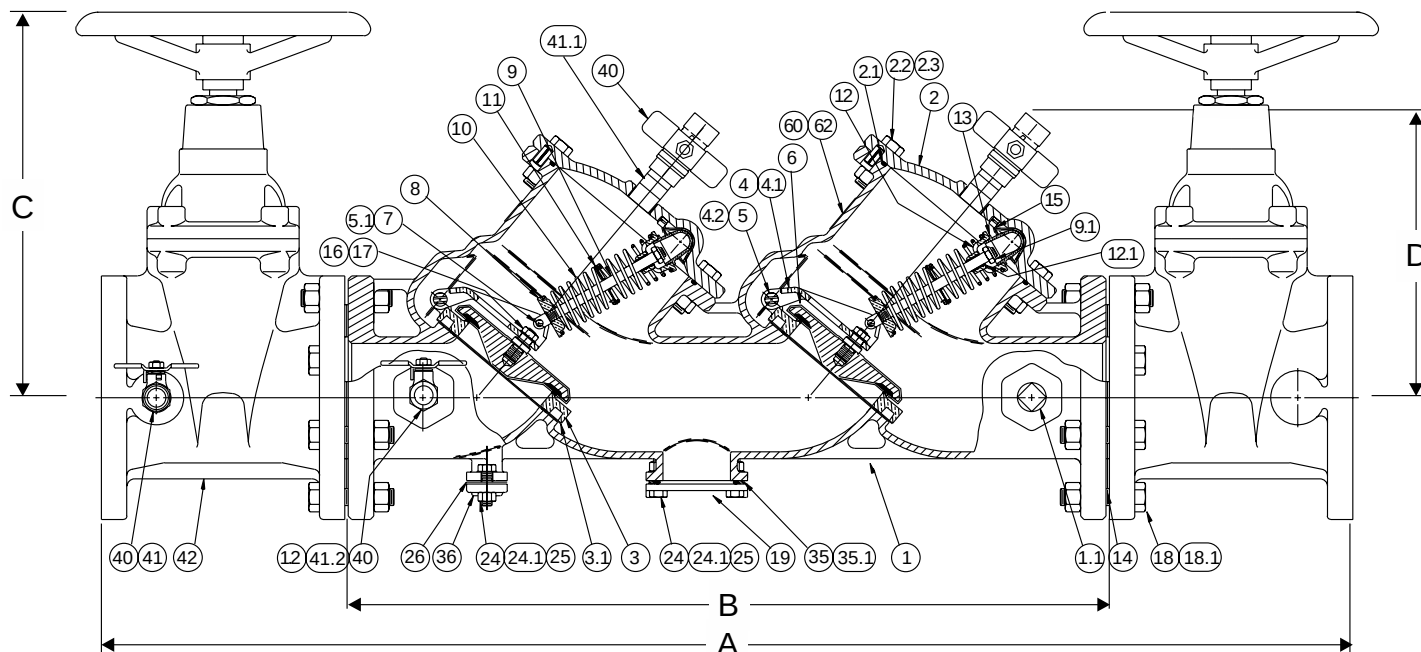

Dimensions and Weights

(U.S. - Inches)

SIZE	A	B	C*	D	G	H	NET (lbs.) NRS	NET (lbs.) OS&Y
2½"	40¾	25½	12⅝	10	4½	7⅞	199	203
3"	41⅞	25⅝	12⅞	10	4½	7⅞	211	213
4"	46¼	28	14⅞	10⅞	5½	8⅞	288	312
6"	56	34¾	18⅞	12¾	6½	9⅞	450	494
8"	65	41¾	23½	15⅞	7	11⅞	711	773
10"	72⅝	46⅞	27½	15⅞	9	12⅞	980	1080


(Metric - MM)

SIZE	A	B	C*	D	G	H	NET (kg) NRS	NET (kg) OS&Y
65	1035.05	647.70	320.68	254.00	114.30	180.98	90	92
80	1063.63	650.88	327.03	254.00	114.30	187.33	96	97
100	1174.75	711.20	365.13	257.20	139.70	206.38	131	142
150	1422.40	882.65	479.43	323.90	165.10	250.83	204	224
200	1651.00	1060.45	596.90	396.88	177.80	282.58	323	351
250	1844.68	1177.93	698.50	396.88	228.60	314.33	445	490

* With NRS Gate Valves

Note: Dimensions are nominal. Allowances must be made for normal manufacturing tolerances.

850 Top View

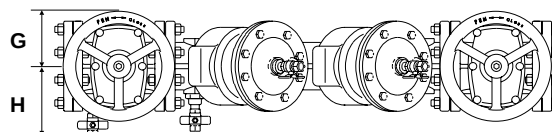

Materials of Construction

ITEM	DESCRIPTION	MATERIALS	ITEM	DESCRIPTION	MATERIALS	ITEM	DESCRIPTION	MATERIALS
1	Body	A536 GR 65-45-12	7	Load Pin	304 SS	24.1	Washer	Plated Steel
1.1	Pipe Plug	Galv. Steel	8	Lwr Spring Retnr	B584 Alloy C83600	25	Bolt	Plated Steel
1.2	Bushing (2½ - 4 only)	Brass	9	Spring Stem	304 SS	26	Gasket	EPDM ASTM D2000
2	Cover	A536 GR 65-45-12	9.1	Elastic Stop Jam Nut	18-8 SS	35	O-Ring	EPDM ASTM D2000
2.1	O-Ring	EPDM ASTM D2000	10	Spring	A313 Type 631 SS	35.1	Back-Up Ring	Acetal Resin
2.2	Cap Screw	Plated Steel	11	Spring Guide	B130 Alloy C22000	36	Cover	B584 Alloy C83600
2.3	Hex Nut	Plated Steel	12	Upr Spring Retnr	B584 Alloy C83600	40	Ball Valve	B584 Alloy C84400
3	Seat Ring	B584 Alloy C83600	12.1	Bushing-Spr. Stem	Acetal Resin	41	Nipple	Brass
3.1	Gasket	EPDM ASTM D2000	13	Pivot Bearing	B585 Alloy C83600	41.1	Nipple	Brass
4	Arm	B584 Alloy C83600	14	Flange Gasket	Rubber/Fabric	41.2	Nipple	Brass
4.1	Bushing-Swing Pin	Acetal Resin	15	Bearing Socket	Acetal Resin	42	Gate Valve	AWWA C509
4.2	Swing Pin	304 SS	16	Hex Jam Nut	18-8 SS	60	Id Plate	B36 Alloy C26000
5	Retaining Clip	302 SS	17	Washer	302 SS	62	Drive Screw	SS
5.1	Retaining Clip	302 SS	18	Flange Nut	Plated Steel	70	Clamp	AWWA 606
6	Check Disk Assy	EPDM Coated GR, 45 Ductile Iron with type 304 SS stem	18.1	Flange Nut	Plated Steel	(10" Only, Not Shown Above)		
			19	Cover	A36 Std Epoxy Coated			
			24	Bolt	Plated Steel			

FEBCO Backflow Prevention

P.O. Box 8070 • Fresno, CA 93747-8070

559 252-0791 • Fax: 559 453-9030 • www.cmb-ind.com • www.FEBCOonline.com



CMB Industries, Inc.

A United Dominion Company

ISO 9001 Certified