



# SUBMITTAL INFORMATION

## Corporation Stops - (F1000-x-Q style)



AWWA/CC TAPER THREAD INLET BY QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET

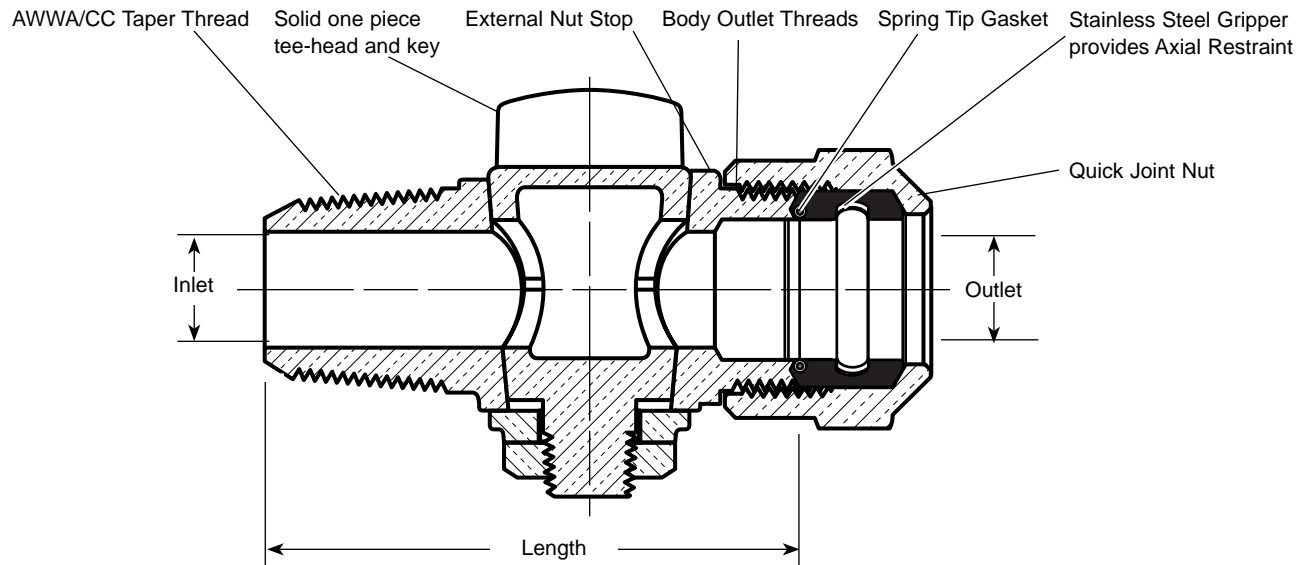

VALVE SIZE	INLET SIZE	OUTLET SIZE	VALVE LENGTH	BODY OUTLET THREADS	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
1/2"	1/2"	1/2"	3-1/8"	1/2" Flare Copper	.9	▼ F1000-1-Q	
5/8"	5/8"	5/8"	3-3/8"	5/8" Flare Copper	1.4	▼ F1000-2-Q	
3/4"	3/4"	3/4"	3-3/4"	3/4" Flare Copper	1.7	▼ F1000-3-Q	
5/8"	3/4"	5/8"	3-3/4"	5/8" Flare Copper	1.7	▼ F1000-32-Q	
1"	1"	1"	4-9/16"	1" Flare Copper	2.7	▼ F1000-4-Q	



▼ UL Classified to ANSI/NSF Standard 61.

**Note:** Ford recommends insert stiffeners when using plastic tubing.

## FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Body design provides larger, more rugged wrench flats for proper installation.
- Meets 100 PSI working pressure requirement of AWWA Standard C800.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

01/15/04

Submitted By: