

## SUBMITTAL INFORMATION





## AWWA/CC TAPER THREAD INLET BY QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET

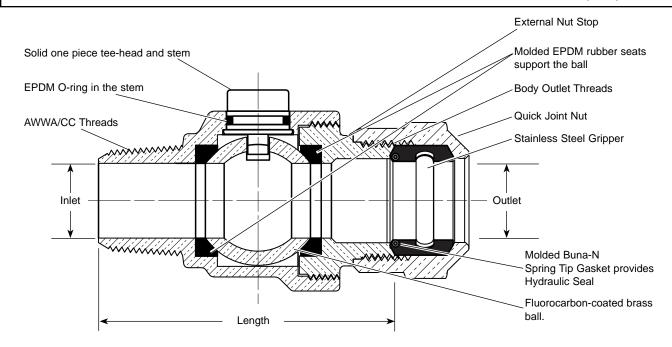

	VALVE SIZE	INLET SIZE	OUTLET	VALVE	BODY OUTLET	APPROX.	PART	✓ SUBMITTED
			Size	LENGTH	THREADS	Wt. Lbs	Number	ITEM(S)
	3/4"	3/4"	3/4"	4-7/16"	3/4" Flare Copper	1.8	▼ FB1000-3-Q	
	1"	1"	1"	4-9/16"	1" Flare Copper	2.6	▼ FB1000-4-Q	
	1-1/4"	1-1/4"	1-1/4"	6-7/16"	1-1/4" Special Thread	4.7	▼▼ FB1000-5-Q	
	1-1/2"	1-1/2"	1-1/2"	6-7/16"	1-1/2" Special Thread	6.0	<b>▼▼</b> FB1000-6-Q	
	2"	2"	2"	6-7/8"	2" Special Thread	9.6	▼▼ FB1000-7-Q	





- ▼ UL Classified to ANSI/NSF Standard 61.
- ▼▼ Add "-K" to end of catalog number for item to be UL classified to ANSI/NSF Standard 61.

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

## **FEATURES**

- All brass conforms to AWWA Standard C800 (ASTM B-62 and B-584, UNS NO C83600 - 85-5-5-5)
- Ends are integral or secured with adhesive to prevent unintentional disassembly.
- 300 PSI working pressure.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



## The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 http://www.fordmeterbox.com

04/18/07

_	•		
Sı	ıhr	nitted	1 Rv