



SUBMITTAL INFORMATION


Flanged Coupling Adapters - (FFCA-xxx style)



STYLE FFCA ADAPTERS FOR JOINING PLAIN END PIPE TO FLANGED FITTINGS

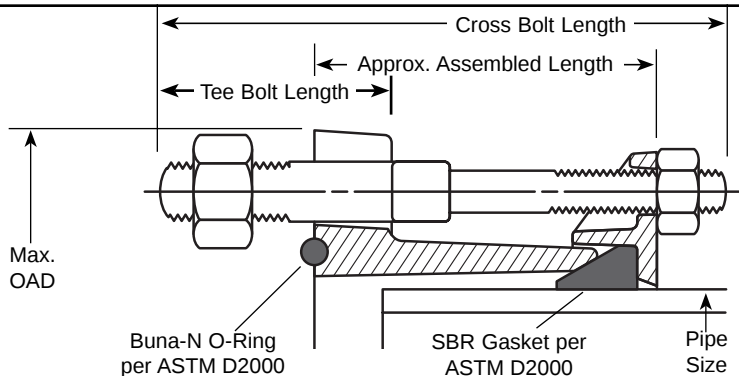

Optional Anchor Studs



NOM. PIPE SIZE	PIPE O.D. RANGE	END RING COLOR CODE	APPROX. ASSEMBLED LENGTH	MAX. O.D.	(NO.) AND SIZE OF CROSS BOLTS	(NO.) AND SIZE OF TEE BOLTS	OPTIONAL ANCHOR STUDS	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
3"	3.45 - 3.60	Red	3-7/8"	7-1/2"	(4) 5/8"x5/8" x 6-5/8"	-	2	18	▼ FFCA-360	
	3.70 - 3.88	Black						18	▼ FFCA-388	
	3.91 - 4.06	Black						18	▼ FFCA-406	
	4.07 - 4.20	White/Gray						18	▼ FFCA-420	
4"	4.45 - 4.60	Red	3-1/2"	9-1/8"	(4) 5/8"x5/8" x 6-5/8"	(4) 5/8"x3"	2	22	▼ FFCA-460	
	4.70 - 4.91	Black						22	▼ FFCA-491	
	4.92 - 5.16	Black						22	▼ FFCA-516	
	5.17 - 5.32	White/Gray						22	▼ FFCA-532	
6"	6.54 - 6.76	Red	4-1/8"	11-1/8"	(4) 3/4"x5/8" x 7-3/8"	(4) 3/4"x3-1/2"	2	34	▼ FFCA-676	
	6.81 - 7.12	Black						34	▼ FFCA-712	
	7.17 - 7.37	Black						34	▼ FFCA-737	
	7.37 - 7.60	White/Gray						34	▼ FFCA-760	
8"	8.50 - 8.75	Red	4-3/16"	13-5/8"	(4) 3/4"x5/8" x 7-3/8"	-	4	45	▼ FFCA-875	
	8.76 - 9.17	Black						45	▼ FFCA-917	
	9.22 - 9.50	Black						45	▼ FFCA-950	
	9.49 - 9.79	White/Gray						45	▼ FFCA-979	
10"	10.69 - 10.85	Red	4-13/16"	16"	(12) 7/8"x5/8" x 8-7/8"	-	4	55	▼ FFCA-1085	
	11.04 - 11.40	Black						55	▼ FFCA-1140	
12"	12.72 - 12.84	Red	4-3/4"	19"	(12) 7/8"x5/8" x 8-7/8"	-	4	66	▼ FFCA-1284	
	13.14 - 13.56	Black						66	▼ FFCA-1356	

Note: Flexible Couplings do not restrain axial forces on piping.

▼ UL Classified to ANSI/NSF Standard 61.

FEATURES

Body and End Rings:	Ductile Iron per ASTM A536 65-45-12.
Gaskets:	SBR per ASTM D2000 90M 4AA 810. Optional Buna-N upon request.
Bolts and Nuts:	High Strength Low Alloy Steel per AWWA C-111 or Ductile Iron per ASTM A536.
Flange:	Drilling per ANSI/AWWA C110/A21.10-86 and per ANSI B16.1 Class 125.
Flange O-Ring:	Buna-N per ASTM D2000.
Finish:	Shop coat. Epoxy coating is optional and available upon request.
Working Pressure:	Rated 175 PSI.
Optional Anchor Studs:	For two studs add "-AS2" to the catalog number. For four studs, add "-AS4" to the catalog number. Examples: FFCA-712- AS2 , FFCA-917- AS4

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

12/23/03

Submitted By: