
SUBMITTAL INFORMATION



Quick Joint Ell Coupling - (L44-xx-Q style)

QUICK JOINT FOR COPPER OR PLASTIC TUBING (CTS) BOTH ENDS

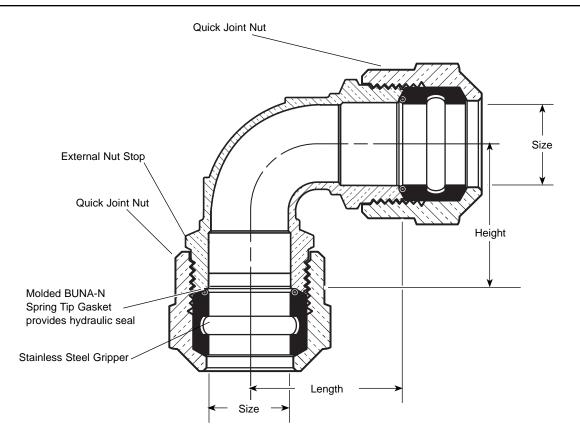

DESCRIPTION		1		APPROX.	PART	✓ SUBMITTED	4
Q.J. FOR CTS	Q.J. FOR CTS	LENGTH	HEIGHT	WT. LBS	NUMBER	ITEM(S)	
3/4"	3/4"	1-5/8"	1-5/8"	1.0	▼ L44-33-Q		
1"	1"	2-1/8"	2-1/8"	1.8	▼ L44-44-Q		
1-1/2"	1-1/2"	2-7/16"	2-7/16"	3.1	▼▼ L44-66-Q		
2"	2"	2-13/16"	2-13/16"	4.2	▼▼ L44-77-Q		



▼ UL Classified to ANSI/NSF Standard 61.

▼▼ Add "- K" to end of catalog number for item to be UL classified to ANSI/NSF Standard 61. **Note:** Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

 All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

The Ford Meter Box Company, Inc. P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487 Overseas Fax: 260-563-0167 http://www.fordmeterbox.com 04/29/05	Submitted By:
--	---------------