

VITREOUS CHINA
TOILET
21-318

21 310



# ULTRA FLUSH® Pressure-Assist Toilet 17" Elongated ErgoHeight™

12" Rough-in


# **Features:**

- Low Consumption 1.6 gpf (6.0 Lpf)
- Elongated ErgoHeight<sup>™</sup> Bowl
- Pressurized Flushing Action
- Close Coupled Flushometer Tank
- Siphon Jet
- Front Tank Lever
- Optional Right-handed Trip Lever Available (Tank #28-380-97)
- Optional Locking Lid Available (Tank #28-380-LL)
- 2 Bolt Caps
- ADA Compliant

**Specifications:** Bowl—#21-377 Elongated ErgoHeight<sup>TM</sup> Tank—#28-380 Seat not included

# **Dimensions:**

Height30	1/2"	
Width20	1/4"	
Depth28	3/4"	
Rough-in	12"	
Water Surface from Rim4 1/2"		
Trapway (min)	2"	
Water Surface12" x	10"	
Water Seal2	1/2"	
Shipping Weight94	lbs	

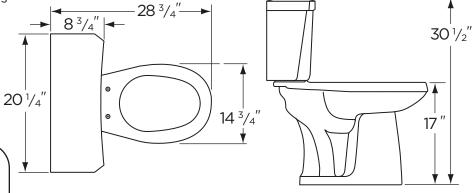

THIS FIXTURE QUALIFIES
ACCORDING TO ASME TEST
PROCEDURES AS A LOW
CONSUMPTION WATER CLOSET
WITH AN AVERAGE CONSUMPTION
OF 1.6 GAL. OR LESS.





www.gerberonline.com

Job Name	
Date	
Model Specified	
Quantity	
Customer	
Contractor	
Architect/engineer	

(Bowl 21-377 with Tank 28-380)



FINISHED WALL 18 1/2" 4 <sup>1</sup>/8 20 1/4  $5^{1/2}''$  $14^{3}/_{4}$ 6 <sup>3</sup>/<sub>8</sub>" S.P.S. SUPPLY -8<sup>3</sup>/<sub>4</sub> 3/8" S.P.S. SUPPLY 30 1/2"  $10^{3}/_{4}$ — 12 <sup>"</sup>-**FINISHED** TWO SLOTS  $(\frac{1}{2}$ " x 1")  $13^{1}/2^{"}$ **FLOOR** 9" 6 5"

## NOTES:

All dimensions are in inches.

Illustrations may not be drawn to scale.

## IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A LOW CONSUMPTION WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.6 gpf (6 Lpf) OR LESS.

VITREOUS CHINA **TOILET** 

**4** of WASTE OUTLET