

COMMERCIAL Eli™ Children's Top Spud Bowl

10" Rough-in

Features:

- Low Consumption 1.6 gpf (6.0 Lpf)
- Round Front
- Reverse Trap
- 1 1/2" Spud for Flushometer Valve
- Includes Spud and Bolt Caps



| Height10 1/8" |
|--------------------------|
| Width13" |
| Depth23 3/8" |
| Rough-in10" |
| Water Surface from Rim3" |
| Trapway (min)17/8" |
| Water Surface 12" x 10" |
| Water Seal2 1/2" |
| Shipping Weight35 lbs |



Flushometer Valve and Seat Sold Separately

RECOMMENDED STATIC WATER PRESSURE FOR PLUMBING FIXTURES IS 20 - 80 PSI STATIC PER ANSI STANDARDS A112.19.2M APPENDIX B.

THIS FIXTURE QUALIFIES
ACCORDING TO ASME TEST
PROCEDURES AS A LOW
CONSUMPTION WATER CLOSET
WITH AN AVERAGE CONSUMPTION
OF 1.6 gpf (6 Lpf) OR LESS.








| 4 23 ³ / ₈ " → | | 13 " |
|---|---------|------|
| | | |
| | 10.17" | |
| | 10 1/8" | |
| | | |

Model Specified
Quantity
Customer
Contractor
Architect/engineer

Job Name

Date

www.gerberonline.com

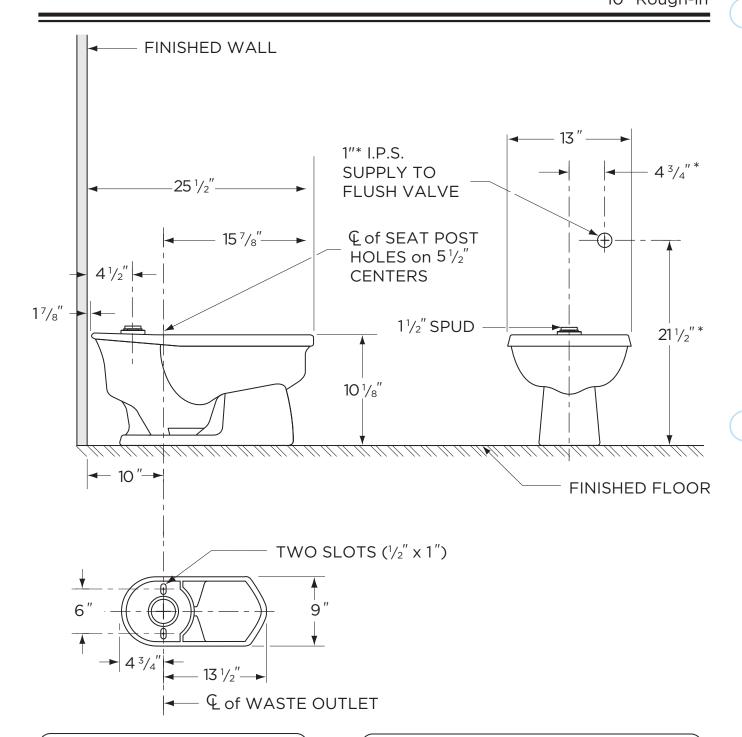

NOTES:

All dimensions are in inches.

*Use flush valve manufacturer's recommended rough-in.

Illustrations may not be drawn to scale.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A LOW CONSUMPTION WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.6 gpf (6 Lpf) OR LESS.

VITREOUS CHINA TOILET