

Hunter®

SRS Spray Sprinklers




SRS

*Economy and
Versatility for
Sprays:
A Solution
that's
Compatible
with all
Standard
Nozzles*

For the many who have been asking for just such a product, Hunter is pleased to present the solution for sprays that offers brand name quality at an economical price. The SRS combines Hunter technology with the exceptional versatility that comes

from being compatible with virtually any standard female-threaded nozzle. You'll find the construction of the SRS is brawny and durable, highlighted by a rugged, flat body cap. The SRS — it's the ultimate in customer convenience from a name you can trust.

FEATURES & BENEFITS

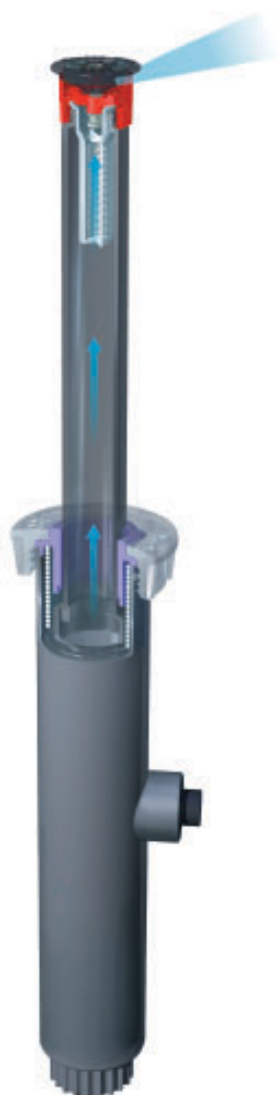

NEW! Full-line of fixed arc and adjustable nozzles

Provides maximum flexibility to accommodate virtually all types of watering needs

Compatible with all standard nozzles

Accepts popular female-threaded nozzles from all major brands

UV-resistant wiper seal

Assures long life at a wide range of water pressures

Standard side inlet

Featured on 6" and 12" models for installation convenience

Adjustable pop-up stem position

Ensures quick pattern alignment

Strong stainless steel spring

Ensures reliable retraction year after year



Models

SRS-00 – Shrub
SRS-02 – 2" Pop-up
SRS-03 – 3" Pop-up
SRS-04 – 4" Pop-up
SRS-06 – 6" Pop-up
SRS-12 – 12" Pop-up

Dimensions

- Overall height:
SRS-02 – 4"
SRS-03 – 4 7/8"
SRS-04 – 6"
SRS-06 – 8 1/2"
SRS-12 – 15 1/4"
- 1/2" female inlet
- Exposed diameter: 2"

Operating Specifications

- Pressure range:
15 to 70 psi
- Radius: 7' to 19'
- Flow-by: 0 gpm
at 10 psi or greater,
.1 gpm at less than
10 psi
- Optional field-
installed drain check
valve for up to 7'
elevation change
- Optional reclaimed
water I.D. cap





Everything's Watered "Just Right"

Whether it's adjustable or fixed, every Hunter spray nozzle produces true matched precipitation across all popular arc and radius ranges. And when you adjust the radius reduction screw, it holds the new setting, unlike many others. Arc adjustments are easy, from the top.

Nozzle identification is easy, too, because each radius is color-coded. Count on the complete Hunter nozzle family for efficient, uniform, water-saving coverage at every residential and commercial site.



Spray Nozzles		Model 7 ft. fixed		Model 7 ft. adj.		Model 10 ft.		Model 12 ft.		Model 15 ft.		Model 17 ft.	
		Fixed Arc (Q,H,F) Trajectory: 0°		Adjustable (25° - 360°) Trajectory: 0°		Adjustable (25° - 360°) or fixed arc (Q,H,F) Trajectory: 15°		Adjustable (25° - 360°) or fixed arc (Q,H,F) Trajectory: 28°		Adjustable (25° - 360°) or fixed arc (Q,H,F) Trajectory: 28°		Adjustable (25° - 360°) or fixed arc (Q) Trajectory: 28°	
		Brown ●		Brown ●		Red ●		Green ●		Black ●		Gray ●	
Arc	PSI	Radius		Radius		Radius		Radius		Radius		Radius	
		Model	ft. GPM	Model	ft. GPM	Model	ft. GPM	Model	ft. GPM	Model	ft. GPM	Model	ft. GPM
45° ▶	20				6' 0.17		9' 0.17		11' 0.27		14' 0.39		16' 0.48
	25				7' 0.19		10' 0.19		12' 0.28		15' 0.44		17' 0.56
	30			7A	7' 0.24	10A	10' 0.24	12A	12' 0.36	15A	15' 0.46	17A	18' 0.60
	35				8' 0.26		11' 0.26		13' 0.38		16' 0.52		18' 0.63
	40				9' 0.37		12' 0.37		14' 0.42		17' 0.57		19' 0.69
90° ◐	20				6' 0.34		9' 0.34		11' 0.53		14' 0.77		16' 0.97
	25				7' 0.39		10' 0.39		12' 0.56		15' 0.88		17' 1.13
	30	7Q	7' 0.24	7A	7' 0.49	10A or 10Q	10' 0.49	12A or 12Q	12' 0.71	15A or 15Q	15' 0.93	17A or 17Q	17' 1.20
	35				8' 0.51		11' 0.51		13' 0.76		16' 1.03		18' 1.25
	40				9' 0.73		12' 0.73		14' 0.84		17' 1.13		19' 1.38
120° ◑	20				6' 0.45		9' 0.45		11' 0.71		14' 1.03		16' 1.29
	25				7' 0.52		10' 0.52		12' 0.75		15' 1.17		17' 1.50
	30			7A	7' 0.65	10A	10' 0.65	12A	12' 0.95	15A	15' 1.24	17A	18' 1.61
	35				8' 0.68		11' 0.68		13' 1.02		16' 1.37		18' 1.67
	40				9' 0.97		12' 0.97		14' 1.12		17' 1.51		19' 1.84
180° ◒	20				6' 0.68		9' 0.68		11' 1.07		14' 1.54		16' 1.94
	25				7' 0.78		10' 0.78		12' 1.12		15' 1.75		17' 2.25
	30	7H	7' 0.48	7A	7' 0.97	10A or 10H	10' 0.97	12A or 12H	12' 1.42	15A or 15H	15' 1.86	17A	17' 2.41
	35				8' 1.02		11' 1.02		13' 1.52		16' 2.06		18' 2.50
	40				9' 1.46		12' 1.46		14' 1.68		17' 2.27		19' 2.75
240° ◓	20				6' 0.91		9' 0.91		11' 1.42		14' 2.06		16' 2.58
	25				7' 1.04		10' 1.04		12' 1.50		15' 2.34		17' 3.00
	30			7A	7' 1.30	10A	10' 1.30	12A	12' 1.90	15A	15' 2.48	17A	17' 3.21
	35				8' 1.36		11' 1.36		13' 2.03		16' 2.75		18' 3.34
	40				9' 1.95		12' 1.95		14' 2.24		17' 3.02		19' 3.67
270° ◔	20				6' 1.02		9' 1.02		11' 1.60		14' 2.31		16' 2.90
	25				7' 1.17		10' 1.17		12' 1.68		15' 2.63		17' 3.38
	30			7A	7' 1.46	10A	10' 1.46	12A	13' 2.14	15A	15' 2.79	17A	17' 3.61
	35				8' 1.53		11' 1.53		13' 2.29		16' 3.09		18' 3.76
	40				9' 2.19		12' 2.19		14' 2.51		17' 3.40		19' 4.13
360° ●	20				6' 1.36		9' 1.36		11' 2.13		14' 3.08		16' 3.87
	25				7' 1.56		10' 1.56		12' 2.24		15' 3.50		17' 4.50
	30	7F	7' 0.95	7A	7' 1.95	10A or 10F	10' 1.95	12A or 12F	12' 2.85	15A or 15F	15' 3.71	17A	17' 4.82
	35				8' 2.04		11' 2.04		13' 3.05		16' 4.12		18' 5.01
	40				9' 2.92		12' 2.92		14' 3.35		17' 4.54		19' 5.51

Strip Pattern Nozzles				
Nozzle Model	PSI	GPM	Color Code: Blue	
			Width (ft.)	Length (ft.)
LCS-515 Left-Corner Strip	20	0.55	4' x 14'	
	25	0.60	5' x 15'	
	30	0.65	5' x 15'	
	35	0.70	5' x 15'	
RCS-515 Right-Corner Strip	40	0.75	5' x 15'	
	20	0.55	4' x 14'	
	25	0.60	5' x 15'	
	30	0.65	5' x 15'	
SS-530 Side-Strip	35	0.70	5' x 15'	
	40	0.75	5' x 15'	
	20	1.10	4' x 28'	
	25	1.20	5' x 30'	
	30	1.30	5' x 30'	
	35	1.40	5' x 30'	
	40	1.50	5' x 30'	

Stream Spray Nozzles				
Nozzle Model	PSI	Color Code: Blue		
		Adj. from 25° - 360°	Radius (ft.)	Flow (GPM)
90° ◐	20	15'	.40	
	25	16'	.46	
	30	16'	.50	
	35	17'	.54	
ST-16A 180° ◒	40	18'	.57	
	20	15'	.67	
	25	16'	.80	
	30	16'	.88	
ST-16A 360° ●	35	17'	.97	
	40	18'	1.04	
	20	15'	1.19	
	25	16'	1.46	
	30	16'	1.66	
	35	17'	1.82	
	40	18'	1.99	

PCN Bubbler Nozzle (flood pattern)			
Model	Pressure PSI	Flow GPM	
25	25	0.25	
50	25	0.50	
10	25	1.0	
20	25	2.0	

For Deep Watering...

The PCN pressure compensating nozzle gives all the precision of drip with no maintenance hassles. Meet the specific watering needs of plants with no excess runoff or waste.



PRODUCT EXPLANATION

EXAMPLE: **SRS - 04 - 10H**

MODEL	POP-UP HEIGHT	NOZZLE SERIES	PATTERN
SRS = Simple, Reliable Spray	00 = Shrub 02 = 2" Pop-up 04 = 4" Pop-up 06 = 6" Pop-up 12 = 12" Pop-up	10 Series	Half Circle

Note: Bodies and nozzles sold separately

Short Radius Nozzles

Arc	PSI	Radius	GPM	PSI	Radius	GPM	PSI	Radius	GPM
90° ◐	20	2'	.09	20	4'	.20	20	6'	.47
	25	2'	.10	25	4'	.22	25	6'	.49
	30	2'	.11	30	4'	.22	30	6'	.51
	35	2'	.12	35	4'	.24	35	6'	.52
	40	2'	.14	40	4'	.24	40	6'	.52
180° ◒	20	2'	.12	20	4'	.41	20	6'	.95
	25	2'	.14	25	4'	.43	25	6'	.97
	30	2'	.16	30	4'	.44	30	6'	.98
	35	2'	.18	35	4'	.46	35	6'	.99
	40	2'	.18	40	4'	.46	40	6'	1.00