

Economy, convenience, versatility: the spray sprinkler that can be used with virtually any standard nozzle



The SRS lets you take advantage of a spray that offers the unrivaled degree of Hunter quality no matter what nozzle you currently have in stock. Better yet, choose to install the adjustable arc nozzles Hunter has created exclusively for use in tandem with the SRS. Either way, you'll receive a superior spray. One whose construction, highlighted by a rugged flat body cap, is

both brawny and durable. And one whose performance delivers the most effective coverage possible, thanks to a no-flow-by wiper seal that allows your system to handle low water pressure as proficiently as high. And, what truly makes this spray head so hard to resist is that its price is so easy to handle.

Features & Benefits



Rugged body cap design

Stands up to heavy traffic in public areas

Compatible with all standard nozzles

Accepts popular female-threaded nozzles including Hunter adjustable arc nozzles

Heavy-duty UV-resistant wiper seal

Assures long life at a wide range of water pressures

Side inlet

Optional side inlet on 6" (15 cm) and standard side inlet on 12" (30 cm) models for installation convenience

Ratcheting riser for quick arc alignment

Ensures quick pattern alignment

Strong stainless steel spring

Ensures reliable retraction year after year



The SRS offers flexibility at an economical price.

Models

- SRS-00 – Shrub
- SRS-02 – 2" Pop-up (5 cm)
- SRS-03 – 3" Pop-up (7.5 cm)
- SRS-04 – 4" Pop-up (10 cm)
- SRS-06 – 6" Pop-up (15 cm)
- SRS-06-NSI – 6" Pop-up (15 cm)
- SRS-12 – 12" Pop-up (30 cm)

Dimensions

- Overall height:
 - SRS-02 – 4" (10 cm)
 - SRS-03 – 4 $\frac{7}{8}$ " (12.5 cm)
 - SRS-04 – 6" (15 cm)
 - SRS-06 – 8 $\frac{1}{2}$ " (21.5 cm)
 - SRS-06-NSI – 8 $\frac{1}{2}$ " (21.5 cm)
 - SRS-12 – 15 $\frac{1}{4}$ " (39 cm)
- $\frac{1}{2}$ " female inlet NPT
- Exposed diameter: 2" (5 cm)

Operating Specifications

- Recommended pressure range: 15 to 70 PSI (1.0 to 4.8 bars; 103 to 482 kPa)
- Flow-by: 0 at 10 PSI (.7 bars; 68 kPa) or greater; .1 GPM (0.02 m³/hr; 0.4 l/min) otherwise
- Precipitation rates: approximately 1.5" per hour


SPECIFICATION GUIDE

EXAMPLE: **SRS - 04 - 10H**

MODEL SRS	POP-UP HEIGHT	NOZZLE SERIES	PATTERN
00	Shrub	8 = 8 Series	A = Adjustable
02	2" Pop-up	10 = 10 Series	Q = Quarter-Circle
03	3" Pop-up	12 = 12 Series	H = Half-Circle
04	4" Pop-up	15 = 15 Series	F = Full-Circle
06	6" Pop-up	17 = 17 Series	
06 NSI	6" Pop-up, Non-side Inlet		
12	12" Pop-up		

Note: Bodies and nozzles sold separately. Also compatible with Hunter's bubbler and specialty nozzles.

Adjustable Arc Nozzles Performance Data																					
		8 Foot Radius Adjustable from 25° to 360° Trajectory: 0° Color Code: Brown				10 Foot Radius Adjustable from 25° to 360° Trajectory: 15° Color Code: Red				12 Foot Radius Adjustable from 25° to 360° Trajectory: 28° Color Code: Green				15 Foot Radius Adjustable from 25° to 360° Trajectory: 28° Color Code: Black				17 Foot Radius Adjustable from 25° to 360° Trajectory: 28° Color Code: Gray			
				Nozzle				Nozzle				Nozzle				Nozzle				Nozzle	
		Pressure	Radius	Flow	Precip	Radius	Flow	Precip	Radius	Flow	Precip	Radius	Flow	Precip	Radius	Flow	Precip	Radius	Flow	Precip	
		PSI	ft.	GPM	in/hr	ft.	GPM	in/hr	ft.	GPM	in/hr	ft.	GPM	in/hr	ft.	GPM	in/hr	ft.	GPM	in/hr	
Arc					▲			▲			▲			▲			▲			▲	
45° 	20	7"	0.20	3.08	3.56	9"	0.20	1.86	2.15	11"	0.25	1.60	1.85	14"	0.37	1.46	1.69	16"	0.48	1.44	1.67
	25	8"	0.22	2.67	3.08	10"	0.22	1.71	1.97	12"	0.28	1.52	1.76	15"	0.42	1.44	1.66	17"	0.54	1.45	1.67
	30	8"	0.25	2.95	3.40	10"	0.25	1.89	2.18	12"	0.32	1.68	1.95	15"	0.47	1.59	1.84	17"	0.60	1.60	1.85
	35	9"	0.27	2.54	2.93	11"	0.27	1.70	1.96	13"	0.34	1.56	1.80	16"	0.51	1.52	1.76	18"	0.65	1.55	1.79
90° 	40	10"	0.29	2.73	3.15	12"	0.29	1.83	2.11	14"	0.37	1.68	1.94	17"	0.54	1.45	1.68	19"	0.70	1.50	1.73
	20	7"	0.39	3.08	3.56	9"	0.39	1.86	2.15	11"	0.50	1.60	1.85	14"	0.74	1.46	1.69	16"	0.96	1.44	1.67
	25	8"	0.44	2.67	3.08	10"	0.44	1.71	1.97	12"	0.57	1.52	1.76	15"	0.84	1.44	1.66	17"	1.09	1.45	1.67
	30	8"	0.49	2.95	3.40	10"	0.49	1.89	2.18	12"	0.63	1.68	1.95	15"	0.93	1.59	1.84	17"	1.20	1.60	1.85
120° 	35	9"	0.53	2.54	2.93	11"	0.53	1.70	1.96	13"	0.69	1.56	1.80	16"	1.01	1.52	1.76	18"	1.31	1.55	1.79
	40	10"	0.57	2.73	3.15	12"	0.57	1.83	2.11	14"	0.74	1.68	1.94	17"	0.99	1.45	1.68	19"	1.41	1.50	1.73
	20	7"	0.52	3.08	3.56	9"	0.52	1.86	2.15	11"	0.67	1.60	1.85	14"	1.09	1.46	1.69	16"	1.28	1.44	1.67
	25	8"	0.59	2.67	3.08	10"	0.59	1.71	1.97	12"	0.76	1.52	1.76	15"	1.12	1.44	1.66	17"	1.45	1.45	1.67
180° 	30	8"	0.65	2.95	3.40	10"	0.65	1.89	2.18	12"	0.84	1.68	1.95	15"	1.24	1.59	1.84	17"	1.60	1.60	1.85
	35	9"	0.71	2.54	2.93	11"	0.71	1.70	1.96	13"	0.91	1.56	1.80	16"	1.35	1.52	1.76	18"	1.74	1.55	1.79
	40	10"	0.77	2.73	3.15	12"	0.77	1.83	2.11	14"	0.98	1.68	1.94	17"	1.45	1.45	1.68	19"	1.87	1.50	1.73
	20	7"	0.78	3.08	3.56	9"	0.78	1.86	2.15	11"	1.01	1.60	1.85	14"	1.49	1.46	1.69	16"	1.92	1.44	1.67
240° 	25	8"	0.89	2.67	3.08	10"	0.89	1.71	1.97	12"	1.14	1.52	1.76	15"	1.68	1.44	1.66	17"	2.17	1.45	1.67
	30	8"	0.98	2.95	3.40	10"	0.98	1.89	2.18	12"	1.26	1.68	1.95	15"	1.86	1.59	1.84	17"	2.40	1.60	1.85
	35	9"	1.07	2.54	2.93	11"	1.07	1.70	1.96	13"	1.37	1.56	1.80	16"	2.02	1.52	1.76	18"	2.61	1.55	1.79
	40	10"	1.15	2.73	3.15	12"	1.15	1.83	2.11	14"	1.48	1.68	1.94	17"	2.18	1.45	1.68	19"	2.81	1.50	1.73
270° 	20	7"	1.05	3.08	3.56	9"	1.05	1.86	2.15	11"	1.34	1.60	1.85	14"	1.98	1.46	1.69	16"	2.56	1.44	1.67
	25	8"	1.18	2.67	3.08	10"	1.18	1.71	1.97	12"	1.52	1.52	1.76	15"	2.24	1.44	1.66	17"	2.89	1.45	1.67
	30	8"	1.31	2.95	3.40	10"	1.31	1.89	2.18	12"	1.68	1.68	1.95	15"	2.48	1.59	1.84	17"	3.20	1.60	1.85
	35	9"	1.42	2.54	2.93	11"	1.42	1.70	1.96	13"	1.83	1.56	1.80	16"	2.70	1.52	1.76	18"	3.48	1.55	1.79
360° 	40	10"	1.53	2.73	3.15	12"	1.53	1.83	2.11	14"	1.97	1.68	1.94	17"	2.91	1.45	1.68	19"	3.75	1.50	1.73
	20	7"	1.18	3.08	3.56	9"	1.18	1.86	2.15	11"	1.51	1.60	1.85	14"	2.23	1.46	1.69	16"	2.88	1.44	1.67
	25	8"	1.33	2.67	3.08	10"	1.33	1.71	1.97	12"	1.71	1.52	1.76	15"	2.52	1.44	1.66	17"	3.26	1.45	1.67
	30	8"	1.47	2.95	3.40	10"	1.47	1.89	2.18	12"	1.89	1.68	1.95	15"	2.79	1.59	1.84	17"	3.60	1.60	1.85
360° 	35	9"	1.60	2.54	2.93	11"	1.60	1.70	1.96	13"	2.06	1.56	1.80	16"	3.04	1.52	1.76	18"	3.92	1.55	1.79
	40	10"	1.72	2.73	3.15	12"	1.72	1.83	2.11	14"	2.21	1.68	1.94	17"	3.27	1.45	1.68	19"	4.22	1.50	1.73
	20	7"	1.57	3.08	3.56	9"	1.57	1.86	2.15	11"	2.02	1.60	1.85	14"	2.98	1.46	1.69	16"	3.84	1.44	1.67
	25	8"	1.77	2.67	3.08	10"	1.77	1.71	1.97	12"	2.28	1.52	1.76	15"	3.37	1.44	1.66	17"	4.34	1.45	1.67
360° 	30	8"	1.96	2.95	3.40	10"	1.96	1.89	2.18	12"	2.52	1.68	1.95	15"	3.72	1.59	1.84	17"	4.80	1.60	1.85
	35	9"	2.13	2.54	2.93	11"	2.13	1.70	1.96	13"	2.74	1.56	1.80	16"	4.05	1.52	1.76	18"	5.22	1.55	1.79
	40	10"	2.30	2.73	3.15	12"	2.30	1.83	2.11	14"	2.95	1.68	1.94	17"	4.36	1.45	1.68	19"	5.62	1.50	1.73

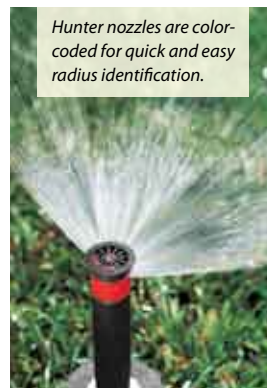

Pro-Spray® Nozzles Performance Data																						
		8 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 0° Color Code: Brown				10 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 15° Color Code: Red				12 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 28° Color Code: Green				15 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 28° Color Code: Black				17 Foot Radius Fixed (Quarter, Half) Trajectory: 28° Color Code: Gray				
		Nozzle		Nozzle		Nozzle		Nozzle		Nozzle		Nozzle		Nozzle		Nozzle		Nozzle		Nozzle		
		Pressure	Radius	Flow	Precip	Radius	Flow	Precip	Radius	Flow	Precip	Radius	Flow	Precip	Radius	Flow	Precip	Radius	Flow	Precip	Radius	
		PSI	ft.	GPM	in/hr	ft.	GPM	in/hr	ft.	GPM	in/hr	ft.	GPM	in/hr	ft.	GPM	in/hr	ft.	GPM	in/hr	ft.	
Arc	Pattern				▲			▲			▲			▲			▲			▲		
90° 	Q	20	7"	0.20	1.54	1.78	9"	0.34	1.63	1.88	11"	0.54	1.71	1.98	14"	0.78	1.53	1.77	16"	0.93	1.40	1.61
		25	8"	0.22	1.33	1.53	10"	0.39	1.48	1.71	12"	0.61	1.62	1.87	15"	0.88	1.51	1.74	17"	1.05	1.39	1.61
		30	8"	0.24	1.46	1.69	10"	0.42	1.63	1.89	12"	0.67	1.78	2.06	15"	0.97	1.67	1.92	17"	1.15	1.54	1.77
		35	9"	0.26	1.25	1.45	11"	0.46	1.47	1.69	13"	0.72	1.65	1.90	16"	1.06	1.59	1.84	18"	1.25	1.49	1.72
180° 	H	40	9"	0.28	1.34	1.55	11"	0.49	1.57	1.82	13"	0.78	1.77	2.04	17"	1.14	1.52	1.75	19"	1.34	1.43	1.65
		20	7"	0.38	1.49	1.72	9"	0.70	1.67	1.92	11"	1.05	1.67	1.93	14"	1.51	1.48	1.71	16"	1.91	1.43	1.66
		25	8"	0.43	1.28	1.48	10"	0.79	1.53	1.76	12"	1.18	1.58	1.83	15"	1.69	1.45	1.67	17"	2.15	1.43	1.65
		30	8"	0.47	1.41	1.63	10"	0.88	1.69	1.95	12"	1.30	1.74	2.01	15"	1.86	1.59	1.84	17"	2.37	1.58	1.82
360° 	F	35	9"	0.51	1.21	1.39	11"	0.95	1.52	1.75	13"	1.42	1.61	1.86	16"	2.02	1.52	1.75	18"	2.57	1.53	1.76
		40	10"	0.54	1.29	1.49	11"	1.03	1.63	1.89	13"	1.52	1.73	2.00	17"	2.16	1.44	1.66	19"	2.76	1.47	1.70
		20	7"	0.78	1.54	1.78	9"	1.29	1.53	1.77	11"	2.17	1.72	1.99	14"	3.04	1.49	1.72				
		25	8"	0.88	1.33	1.53	10"	1.45	1.39	1.61	12"	2.45	1.63	1.89	15"	3.41	1.46	1.69				
		30	8"	0.97	1.46	1.69	10"	1.59	1.53	1.76	12"	2.70	1.80	2.08	15"	3.75	1.61	1.85				
		35	9"	1.05	1.25	1.45	11"	1.72	1.37	1.58	13"	2.93	1.67	1.93	16"	4.07	1.53	1.76				
		40	10"	1.13	1.34	1.55	11"	1.84	1.46	1.69	13"	3.15	1.80	2.07	17"	4.36	1.45	1.68				