



**Tag:**  
**Series :**            **2400**

**METAL\*AIRE®**  
**Submittal No:**        **2400**



**Linear Bar Grilles / Registers - 1/2" Border**  
**Extruded Aluminum - 1/8" Bars - 1/4" Center**

|                |               |               |               |                                                         |
|----------------|---------------|---------------|---------------|---------------------------------------------------------|
| <b>Models:</b> | <b>2400</b>   | <b>2415</b>   | <b>2430</b>   | Wall Mounting - 0°/15°/30° Deflection                   |
|                | <b>2400H</b>  | <b>2415H</b>  | <b>2430H</b>  | Concealed Mounting Hangers - 0°/15°/30° Deflection      |
|                | <b>2400HP</b> | <b>2415HP</b> | <b>2430HP</b> | Concealed Spline Mounting Frame - 0°/15°/30° Deflection |
|                | <b>2400HW</b> | <b>2415HW</b> | <b>2430HW</b> | Narrow Mounting Frame - 0°/15°/30° Deflection           |



**Models: 2400, 2415, 2430 (Wall Mounting - 0° / 15° / 30° %5d Deflection)**

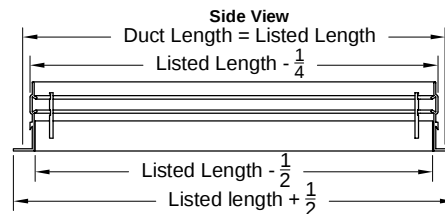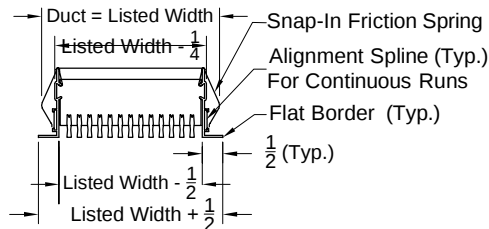



**Models: 2400H, 2415H, 2430H (Concealed Mounting Hangers - 0° / 15° / 30° Deflection)**

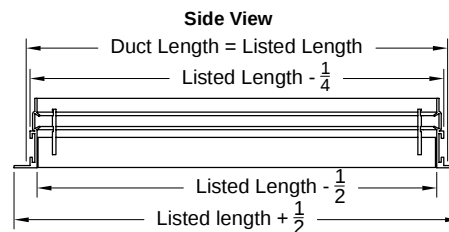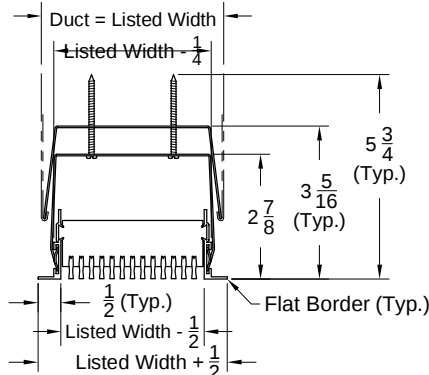

**Models: 2400HP, 2415HP, 2430HP (Concealed Spline Mounting Frame - 0° / 15° / 30° Deflection)**

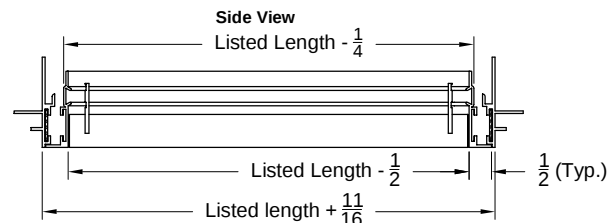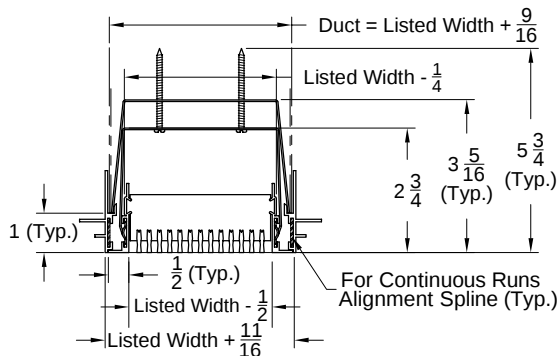

**Models: 2400 HW, 2415 HW, 2430 HW (Narrow Mounting Frame - 0° / 15° / 30° Deflection)**

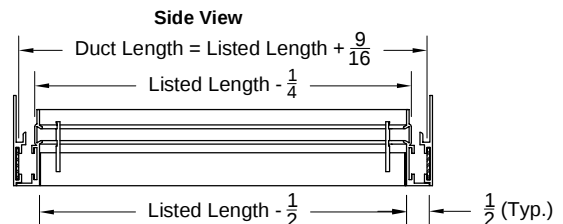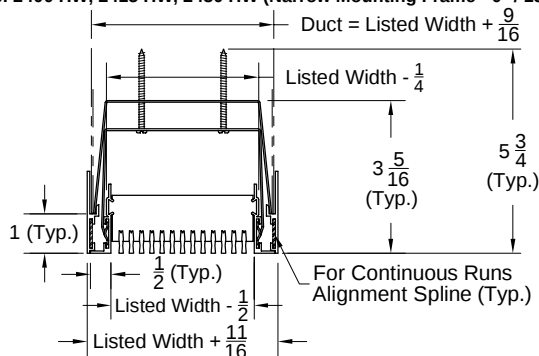

Dimensions are in inches


Tag:  
Series : 2400

**METAL\*AIRE®**  
Submittal No: 2400



**Linear Bar Grilles / Registers - 1/2" Border  
Extruded Aluminum - 1/8" Bars - 1/4" Center**

**Models:** 2400HC 2415HC 2430HC    **Combination Narrow Mounting Frame - 0° / 15° / 30° Deflection**  
**Options:** 0°, 15° or 30° Deflection    **For All Models**  
OBDE    **Opposed Blade Damper**  
MC    **Mitered Corner For All Models**


Models: 2400HC, 2415HC, 2430HC (Combination Narrow Mounting Frame - 0° / 15° / 30° %5d Deflection)

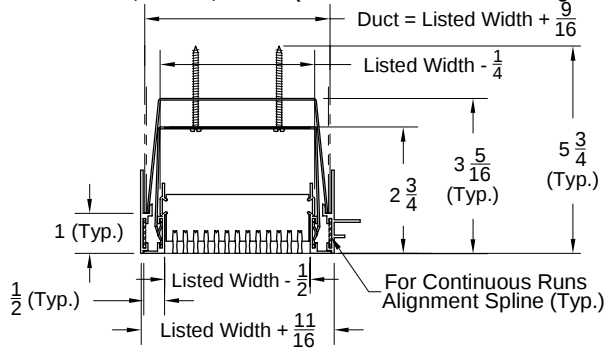



**Face View (All Models)**  
No. of Bar = 4 x Listed Width - 3 Bars

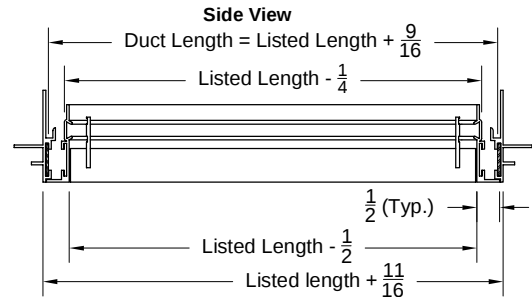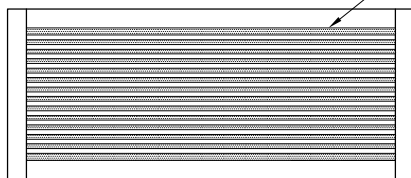

**Options: 0°, 15° or 30° Deflection**

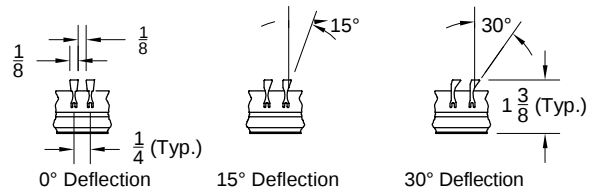


**Option: OBDE Opposed Blade Damper**

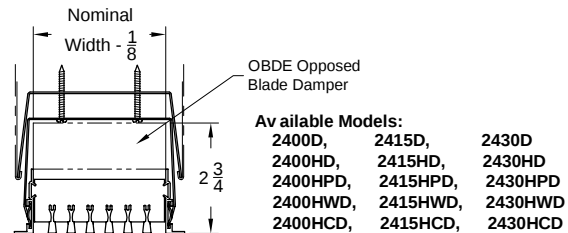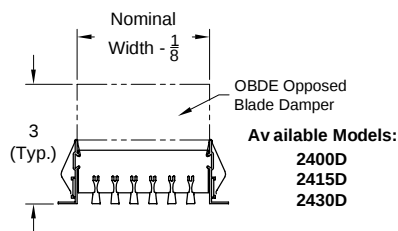

| Models Available    |            |             |             |             |            |
|---------------------|------------|-------------|-------------|-------------|------------|
| Grilles (Registers) |            |             |             |             | Deflection |
| 2400 (D)            | 2400 H (D) | 2400 HP (D) | 2400 HW (D) | 2400 HC (D) | 0°         |
| 2415 (D)            | 2415 H (D) | 2415 HP (D) | 2415 HW (D) | 2415 HC (D) | 15°        |
| 2430 (D)            | 2430 H (D) | 2430 HP (D) | 2430 HW (D) | 2430 HC (D) | 30°        |

**Mitered Corner Sections**

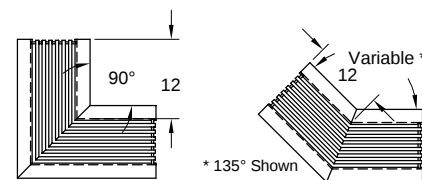

| 1. Available Finishes                                                                                                                                    | 2. Available Accessories                                                                                                                  | 3. Available Options                                                                                                                                                                                                 | 4. Construction Details                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standard Finish:</b><br><input type="checkbox"/> 01 White.<br><b>Optional Finish ( extra charge ):</b><br><input type="checkbox"/> 04 Clear Anodized. | <input type="checkbox"/> L9 Equalizing Grid.<br><input type="checkbox"/> Mitered Corner.<br><input type="checkbox"/> Damper (For Grille). | <input type="checkbox"/> <b>Dampers:</b><br>Widths 3 1/2" and smaller use a single flap style damper.<br><input type="checkbox"/> Widths 4" and larger use Model OBDE Damper.<br><input type="checkbox"/> Core Only. | <ul style="list-style-type: none"><li>• Widths available in 1/2" increments from 1 1/2" to 24".</li><li>• Lengths available in single pieces up to 72".</li><li>• Longer sections are made by joining sections in the field with factory supplied alignment strip.</li><li>• Standard mounting in concealed friction spring clips.</li><li>• Available Reverse Sizes ( face bars parallel to the short side).</li></ul> |

Notes: ( ☐ check if provided )

Dimensions are in inches

Cad File Number: 2400-p2-55

Date: 03/25/2003

Submittal No. 2400

Page: 2 of 2