


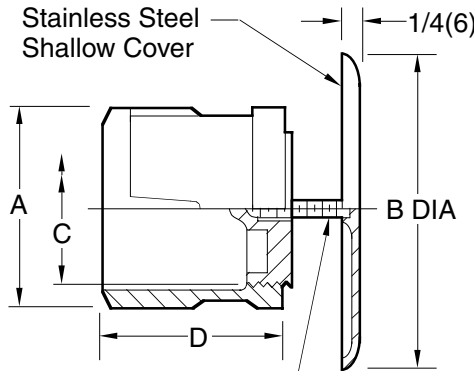
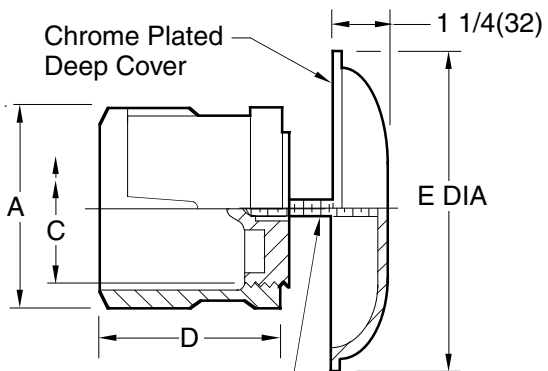


G	DRAWING NUMBER S4420	SIZE A	SCALE: NONE	DATE: 2-16-70	APPROVED BY: BH	CHECKED BY: BH	DRAWN BY: RK	4420 SERIES	DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE	WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA	<div>SMITH® CUSTOMER DRIVEN</div> <div>JAY R. SMITH MFG. CO.® DIVISION OF SMITH INDUSTRIES, INC. POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com</div> <div>   MEMBER OF:</div>	LOCATION																																								
											<div>CAULK FERRULE CLEANOUTS WITH ACCESS COVERS</div> <div>TAPER THREAD PLUG WITH ROUND COVER</div> <div><p><b>FUNCTION:</b> Used in hub openings in drainage piping where a cleanout is required. Ribbing on outside of ferrule prevents turning of ferrule in the caulking lead. Face-of-wall cover is desirable on finished walls.</p><div><div><p>Stainless Steel Shallow Cover</p><p>1/4(6) - 20 x 2 1/2(64) Long Flat Head Machine Screw</p></div><div><p>Chrome Plated Deep Cover</p><p>1 1/4(32) - 20 x 1 1/2(38) Long Flat Head Machine Screw</p></div></div><div>WITH COUNTERSUNK PLUG</div><div><div><input type="checkbox"/> FIG. 4420C . . . . LESS COVER AND SCREW</div><div><input type="checkbox"/> FIG. 4421C . . . . WITH DEEP COVER AND SCREW</div><div><input type="checkbox"/> FIG. 4422C . . . . WITH SHALLOW COVER AND SCREW</div></div><table><thead><tr><th></th><th>A SIZE</th><th>B DIA</th><th>C SIZE</th><th>D</th><th>E DIA</th></tr></thead><tbody><tr><td>▲ 02 (50)</td><td>4 1/4 (110)</td><td>1 1/2 (38)</td><td>3 1/2 (89)</td><td>*7 1/4 (185)</td></tr><tr><td>▲ 03 (80)</td><td>5 1/2 (140)</td><td>2 1/2 (64)</td><td>3 3/4 (95)</td><td>*7 1/4 (185)</td></tr><tr><td>▲ 04 (100)</td><td>5 1/2 (140)</td><td>3 1/2 (89)</td><td>4 1/4 (110)</td><td>*7 1/4 (185)</td></tr><tr><td>05 (125)</td><td>7 (180)</td><td>4 (100)</td><td>4 1/4 (110)</td><td>*7 1/4 (185)</td></tr><tr><td>06 (150)</td><td>9 1/4 (235)</td><td>5 (125)</td><td>4 1/4 (110)</td><td>9 1/4 (235)</td></tr><tr><td>08 (200)</td><td>11 1/4 (285)</td><td>6 (150)</td><td>4 1/2 (115)</td><td>11 1/4 (285)</td></tr></tbody></table><div>* = Die Formed SS Cover Only.</div><div><div>OPTIONAL MATERIALS: (4420 &amp; 4422)</div><div><div><input type="checkbox"/> Cast Bronze Ferrule -CB</div><div><input type="checkbox"/> Prime Coated Steel Shallow Cover -PC</div></div></div><div>▲ Sized for Service Weight and/or NO-HUB</div><div><div>REGULARLY FURNISHED:</div><div>Duco Cast Iron Caulk Ferrule with Cast Bronze Taper Thread Plug.</div><div>Type of Cover as Indicated by Figure Number Selected.</div></div><div><div>VARIATIONS:</div><div><div><input type="checkbox"/> Longer Screw 6"(150) Lg. -LS</div><div><input type="checkbox"/> "T" Handle Plug -TP</div><div><input type="checkbox"/> Plug Tapped 1/4"(6) -20 Thread</div><div><input type="checkbox"/> Vandal Proof Screw-U</div></div></div><div><div>OPTIONAL MATERIALS: (4421)</div><div><div><input type="checkbox"/> Cast Bronze Body -BB</div><div><input type="checkbox"/> Nickel Bronze Deep Cover -NB</div><div><input type="checkbox"/> Polished Bronze Deep Cover -PB</div></div><div>9 1/4"(235) &amp; 11 1/4"(285) sizes only</div></div><div><p><b>NOTE:</b> Dimensions shown in parentheses are in millimeters.</p><table><thead><tr><th>REV.</th><th>DATE</th><th>DESCRIPTION</th><th>BY</th><th>CKD. BY</th><th>WEIGHT POUNDS</th><th>VOLUME CUBIC FEET</th><th>FIGURE NUMBER 4420 SERIES</th></tr></thead><tbody><tr><td>G F</td><td>10-20-98 8-11-97</td><td>Revised S.W. and/or N.H Chg'd Var. &amp; Opt. Mat.</td><td>TBW EMB</td><td>JCS BS</td><td></td><td></td><td></td></tr></tbody></table></div></div>		A SIZE	B DIA	C SIZE	D	E DIA	▲ 02 (50)	4 1/4 (110)	1 1/2 (38)	3 1/2 (89)	*7 1/4 (185)	▲ 03 (80)	5 1/2 (140)	2 1/2 (64)	3 3/4 (95)	*7 1/4 (185)	▲ 04 (100)	5 1/2 (140)	3 1/2 (89)	4 1/4 (110)	*7 1/4 (185)	05 (125)	7 (180)	4 (100)	4 1/4 (110)	*7 1/4 (185)	06 (150)	9 1/4 (235)	5 (125)	4 1/4 (110)	9 1/4 (235)	08 (200)	11 1/4 (285)	6 (150)	4 1/2 (115)	11 1/4 (285)	REV.	DATE	DESCRIPTION	BY	CKD. BY
	A SIZE	B DIA	C SIZE	D	E DIA																																															
▲ 02 (50)	4 1/4 (110)	1 1/2 (38)	3 1/2 (89)	*7 1/4 (185)																																																
▲ 03 (80)	5 1/2 (140)	2 1/2 (64)	3 3/4 (95)	*7 1/4 (185)																																																
▲ 04 (100)	5 1/2 (140)	3 1/2 (89)	4 1/4 (110)	*7 1/4 (185)																																																
05 (125)	7 (180)	4 (100)	4 1/4 (110)	*7 1/4 (185)																																																
06 (150)	9 1/4 (235)	5 (125)	4 1/4 (110)	9 1/4 (235)																																																
08 (200)	11 1/4 (285)	6 (150)	4 1/2 (115)	11 1/4 (285)																																																
REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4420 SERIES																																													
G F	10-20-98 8-11-97	Revised S.W. and/or N.H Chg'd Var. & Opt. Mat.	TBW EMB	JCS BS																																																