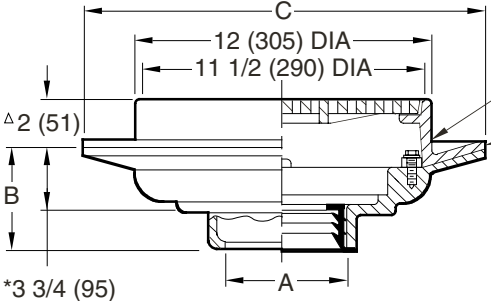


FIGURE NUMBER	2130,2131,2135	DRAWN BY: BS	CHECKED BY: TD	APPROVED BY: TD	DATE: 5-17-85	SCALE: NONE	SIZE A	DRAWING NUMBER S2130	H	SMITH® JAY R. SMITH MFG. CO.® DIVISION OF SMITH INDUSTRIES, INC. POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com  MEMBER OF:	LOCATION								
										FLOOR DRAINS WITH 12" (305) ROUND TOPS									
										MEDIUM DUTY DRAINS									
										FUNCTION: Used in moderate traffic areas where waste water contains no sediment or debris and floor construction requires a shallow drain. Body flange and flashing collar serve as anchor in on grade locations and as flashing clamp when installed in waterproof floors.  Free Area 28.5 SQ IN (184) SQ CM Seepage Openings Collar Can Be Used As Flashing Clamp (When Required)									
										Fig. 2130C ... SHALLOW BODY CAULK OUTLET Fig. 2131CDEEP BODY CAULK OUTLET Fig. 2131YDEEP BODY NO-HUB OUTLET									
<table><tr><th rowspan="2">Figure</th><th colspan="3">B</th><th rowspan="2">C DIA</th></tr><tr><th>Caulk</th><th>Thread</th><th>NO-HUB</th></tr><tr><td>2130</td><td>3 3/4 (95)</td><td>3 3/4 (95)</td><td>5 (125)</td><td>**15 1/4 (390)</td></tr><tr><td>2131</td><td>5 (125)</td><td>3 3/4 (95)</td><td>5 (125)</td><td>15 1/4 (390)</td></tr></table> ** Dimension is 16 (405) for Caulk outlet.		Figure	B			C DIA	Caulk	Thread	NO-HUB	2130	3 3/4 (95)	3 3/4 (95)	5 (125)	**15 1/4 (390)	2131	5 (125)	3 3/4 (95)	5 (125)	15 1/4 (390)
Figure	B			C DIA															
	Caulk	Thread	NO-HUB																
2130	3 3/4 (95)	3 3/4 (95)	5 (125)	**15 1/4 (390)															
2131	5 (125)	3 3/4 (95)	5 (125)	15 1/4 (390)															

REGULARLY FURNISHED:
Duct Cast Iron Body and Flashing Collar with Cast Iron Bar Grate.

*This Dimension to Internal Stop of Speedi-Set Gasket.
Δadd 3/8" (10) when hinged top is specified.
Δadd 1/8" (3) when bronze top is specified.
■ Meets U. S. Gov't Spec. WW-P-541-b.
Type 220 04" (100) size only.

VARIATIONS:

 Deflector Grate -DG

 Dome Grate -D

 Flat Bottom Strainer -FBS

 Hinged Grate -H

 L Speedi-Set Service Weight 2(50), 3(75) & 4" (100) sizes only (Fig. 2131 only)

 LXH Speedi-Set Extra Heavy 2(50), 3(75) & 4"(100) sizes only (Fig. 2131 only)

 NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2130 & 2135 only)

 Sediment Bucket -B

 Solid Scoriated Cover -SC

 Square Top -S

 Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19) (Fig. 2131,2131Y & 2135 only)

 Vandal Proof Grate -U

 Wide Flange Deck Drain (Specify Fig. DX2566)

 T Threaded Outlet

OPTIONAL MATERIALS:

 Ductile Iron Grate -M

 Galvanized Cast Iron -G

 Nickel Bronze Top -NB

 Polished Bronze Top -PB

NOTE: 02(50), 03(75), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.

NOTE: Dimensions shown in parentheses are in millimeters.

H G F E	1-10-07 1-18-96 6-15-95 7-1-94	Revised Millimeters Revised Added Millimeters Revised	RN TBW EMB CMB	CL BS BS BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2130,2131,2135
REV.	DATE	DESCRIPTION	BY	CKD. BY			