

# FLOOR DRAINS

## WITH 12" (305) ROUND TOPS AND SEDIMENT BUCKETS

### MEDIUM DUTY DRAINS - "SAFE-SET" BUCKET

**FUNCTION:** For general use where water contains solids or debris that must be intercepted. Large top is used where high flows are anticipated. "Safe-Set" design insures bucket replacement after cleaning since top grate cannot be inserted unless bucket is in place.

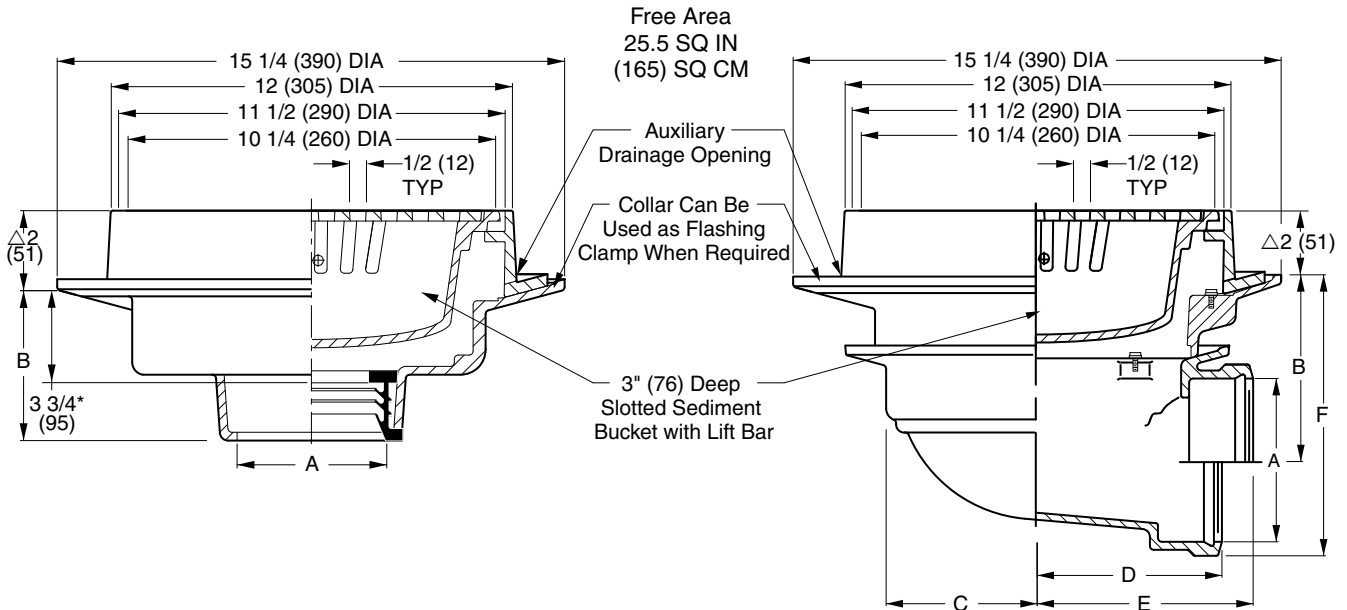


Fig. 2230C.....CAULK OUTLET  
 Fig. 2230Y.....NO-HUB OUTLET

Fig. 2235C.....CAULK OUTLET  
 Fig. 2235T.....THREADED OUTLET

| A<br>Size                                 | B                             |            |
|-------------------------------------------|-------------------------------|------------|
|                                           | Caulk, NO-HUB<br>& Speedi-Set | Threaded   |
| 02(50),03(75)04(100)<br>05(125) & 06(150) | 5 (125)                       | 3 3/4 (95) |

| A SIZE | 02(50)     | 03(75)     | 04(100)    | 05(125)    | 06(150)    |
|--------|------------|------------|------------|------------|------------|
| B      | 6 7/8(175) | 6 3/8(162) | 5 7/8(149) | 5(125)     | 4 1/2(115) |
| C      | 4 3/4(120) | 4 3/4(120) | 4 3/4(120) | 6 1/4(160) | 6 1/4(160) |
| D      | 6(150)     | 6(150)     | 6(150)     | 6 5/8(168) | 6 7/8(175) |
| E      | 7 1/4(185) | 7 1/2(190) | 7 3/4(195) | 7 3/4(195) | 7 3/4(195) |
| F      | 8 5/8(219) | 8 3/4(220) | 8 3/4(220) | 8 1/2(215) | 8 1/2(215) |

#### REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing  
 Collar with Cast Iron ADA Grate  
 and Slotted Sediment Bucket.

\* This Dimension to Internal Stop  
 of Speedi-Set Gasket.

△Add 5/16" (8) when bronze top  
 is specified.

△Add 7/8" (22) when hinged cast  
 iron top is specified.

• Hinged grate not available in  
 safe-set design. Full grate is  
 provided with a suspended  
 bucket.

#### VARIATIONS:

- Hinged Grate -H
- L Speedi-Set Service Weight 2(50), 3(75)  
& 4"(100) sizes only (Fig. 2230 only)
- LXH Speedi-Set Extra Heavy 2(50), 3(75)  
& 4"(100) sizes only (Fig. 2230 only)
- NO-HUB Adaptor (Specify Fig. 2646Y)  
(Fig. 2235 only)
- Solid Free Standing Bucket -B
- Square Top -S
- Trap Primer Connection -P050 1/2" (13)  
& -P075 3/4" (19) (Fig. 2230 only)
- Vandal Proof Grate -U
- Wide Deck Flange Drain (Specify Fig. DX2566)
- T Threaded Outlet

#### OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Nickel Bronze -NB
- Polished Bronze -PB

**NOTE:** Dimensions shown in  
 parentheses are in millimeters.

**NOTE:** 02(50), 03(75) & 04" (100) sizes  
 require a transition collar (as shown in  
 above illustration) which fits between the  
 body & collar. 05 (125) & 06 (150) sizes  
 do not require transition collar.

DRAWING NUMBER  
 S2230, 2235

SIZE  
 A

SCALE:  
 NONE

DATE:  
 5-17-85

APPROVED BY:  
 TD

CHECKED BY:  
 TD

DRAWN BY:  
 PJ

2230, 2235

FIGURE  
 NUMBER

N 8-27-10 Corrected Symbols & Dims.  
 M 04/22/10 Corrected Symbols & Dims.  
 L 10/09/09 Added ADA Grate-opening Dim.  
 K 4-1-99 Submittal Redraw Vellum

RN  
 JJ  
 JJ  
 CMD

CL  
 TK  
 TK  
 CL

WEIGHT  
 POUNDS

VOLUME  
 CUBIC FEET

FIGURE NUMBER

2230, 2235

REV. DATE DESCRIPTION BY CKD.