DRAWING NUMBER

4

NONE

8-19-83

9

9

AND CHANGE WITHOUT NOTICE

**DIMENSIONS ARE** 

IGURE JUMBER

SUPERSEDED OR VOID DATA

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF






LOCATION

# SPECIAL PURPOSE ROOF DRAINS

## WATER DAM TYPE

FUNCTION: Used in flat roofs of any construction where a constant height of water is desired on the roof. It may also be used as an emergency overflow for conventional roofs, draining rain water when the depth of the water on the roof reaches the water dam height.

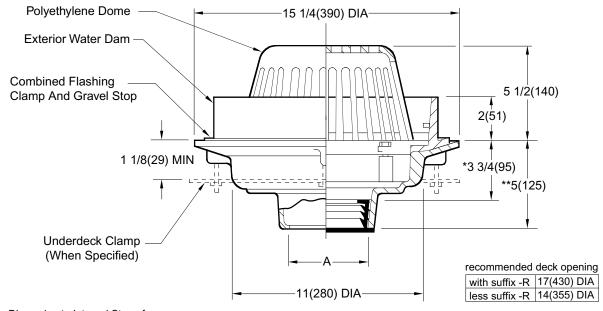

<sup>\*</sup>This Dimension to Internal Stop of Speedi-Set Gasket

A (Pipe Size) 02(50), 03(75), 04(100), 05(125), 06(150) or 08(200)

Fig. 1080C	CAULK OUTLET
Fig. 1080Y	NO-HUB OUTLET

REGULAREI I URMISHED.
Duco Cast Iron Body, Flashing
Clamp and Gravel Stop with
Polyethylene Dome, and Cast
Iron Water Dam

DECLII ADI V ELIDNICHED.

NOTE: Dimensions shown in parentheses are in millimeters.

VARIATIONS:
Adjustable Extension(Specify Fig. 1045)
Expansion Joint (Specify Fig. 1710)
Extension -E (Specify Height)
"L" Shaped Underdeck Clamp -CL
1. 0 1.0 1.0 1. 141 1.1

L Speedi-Set Service Weight 02(50), 03(75) & 04(100)" sizes only LXH Speedi-Set Extra Heavy 02(50), 03(75) & 04(100)" sizes only Secondary Flashing Clamp -C2

Sump Receiver -R Underdeck Clamp -C Vandal Proof Dome -U

Threaded Outlet

### **OPTIONAL MATERIALS:**

Aluminum Dome -AD Cast Iron Dome -CID Galvanized Cast Iron Body & Collar -G Galvanized Cast Iron Dome -CIDG Rough Bronze Dome -RBD

### FIGURE NUMBER WEIGHT VOLUME Rev. Variations Rev. Opt. Mat. Added Millimeters 07/20/05 CMD CL BS POUNDS CUBIC FEFT 5-26-99 1080 7-2-96 **DESCRIPTION** CKD. BY

<sup>\*\*</sup>Same for Caulk, NO-HUB and Speedi-Set. 3 3/4(95) for Threaded.