



JAY R. SMITH MFG. CO.
DIVISION OF SMITH INDUSTRIES, INC.
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

GENERAL PURPOSE ROOF DRAINS

8 1/2" (215) DIAMETER - LOW PROFILE DOME

FUNCTION: Used in flat roofs, gutters or valleys of any construction. Small diameter pan is particularly adaptable to gutters and valleys where limited space is available. Flashing clamp holds flashing and roofing materials without puncturing. Low profile dome provides sufficient free area for quick drainage of rain water and protects the drain sump and connected piping from the intrusion of debris.

Free Area
41.5 SQ IN
(268) SQ CM

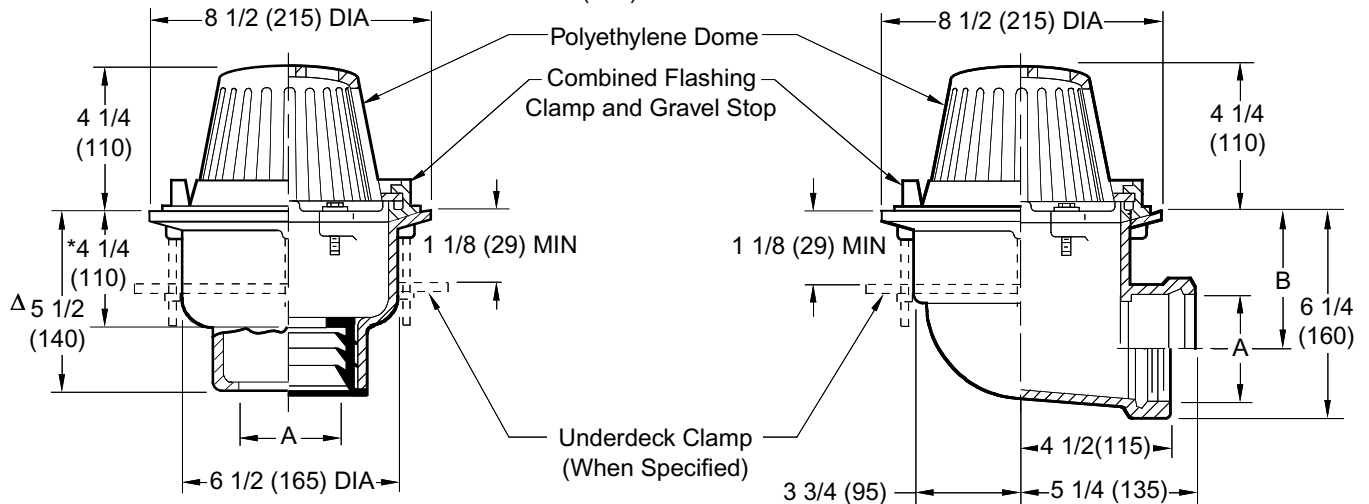


Fig. 1330C CAULK OUTLET
Fig. 1330Y NO-HUB OUTLET

A (Pipe Size) = 02(50), 03(75) or 04(100)

recommended deck opening

with suffix -R	9(230) DIA
less suffix -R	7 3/4(195) DIA

*This Dimension to Internal

Stop of Speedi-Set Gasket.

Δ Same for Caulk, NO-HUB and Speedi-Set, 4 1/4(110) for Threaded.

Fig. 1340C CAULK OUTLET
Fig. 1340T THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/2 (115)	4 (100)	3 1/2 (89)

REGULARLY FURNISHED:

Duco Cast Iron Body with Combined Flashing Clamp and Gravel Stop with Polyethylene Dome.

VARIATIONS:

- ☐ Expansion Joint (Specify Fig. 1710) (Fig. 1330 only)
- ☐ Extension -E (Specify Height)
- ☐ 2"(51) High Water Dam -WD
- ☐ "L" Shaped Underdeck Clamp -CL
- ☐ L Speedi-Set Service Weight (Fig. 1330 only)
- ☐ LXH Speedi-Set Extra Heavy (Fig. 1330 only)
- ☐ NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 1340 only)
- ☐ Secondary Flashing Clamp -C2
- ☐ Sump Receiver -R
- ☐ Underdeck Clamp -C
- ☐ Vandal Proof Dome -U
- ☐ T Threaded Outlet

OPTIONAL MATERIALS:

- ☐ Aluminum Dome -AD
- ☐ Cast Iron Dome -CID
- ☐ Galvanized Cast Iron Body & Collar -G
- ☐ Galvanized Cast Iron Dome -CIDG
- ☐ Rough Bronze Dome -RBD

NOTE: Dimensions shown in parentheses are in millimeters.

11-1-02
5-26-99
4-7-97
Rev. "V" Notch
Rev. Opt. Mat.
Added Millimeters

RN
CMD
EMB

BS
BS

WEIGHT
POUNDS

VOLUME
CUBIC FEET

FIGURE NUMBER

1330, 1340

REV. DATE DESCRIPTION BY CKD. BY