S3100

DATA

VOID

SUPERSEDED OR

Ы

NONE Y FOR USE

RESPONSIBILITY

9-19-85 SUME NO

CAN ASSUME

WE

TOLERANCE AND CHANGE WITHOUT NOTICE

DIMENSIONS ARE SUBJECT TO MANUFACTURERS

DC

REV

4-8-96

6-21-95

7-13-94

12-3-93

DATE

APPROVED BY

СНЕСКЕD ВУ **JD**

DRAWN BY:

FIGURE NUMBER

DRAWING NUMBEF




LOCATION

SANI-CEPTOR® ACID RESISTANT COATED FLOOR & INDIRECT WASTE DRAINS

SQUARE NICKEL BRONZE TOP 8 1/2" (215) TOP - MEDIUM RECEPTORS

FUNCTION: Used in kitchens, hospitals, food markets, restaurants, schools and all types of food handling areas where the ultimate in sanitation is desirable and a medium capacity receptor is required.

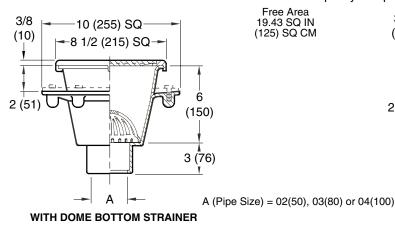

Rev Rim Description

DESCRIPTION

Added Millimeters

Submittal Update

Revised

3/8 (10) 8 1/2 (215) SQ 6 (150) 3 (76)

WITH SEDIMENT BUCKET

Fig. 3100C	CAULK OUTLET	Fig. 3101C
	NO-HUB OUTLET	

FEATURES, OPTIONS & ORDERING INFORMATION

REGULARLY FURNISHED: Cast Iron Flanged Receptor with Seepage Holes, Acid Resistant Coated Interior, Nickel Bronze Rim and Secured Grate. Aluminum Dome Bottom Strainer or Sediment Bucket as Indicated by Figure Number.

OPTIONAL MATERIALS:	VARIATIONS:	
All Duco Cast Iron Receptor -CI	Aluminum Flat Bottom Strainer -FBS	
All Galvanized Receptor -G	Flashing Clamp -C	
	Less Flange (Specify Fig. 3105, 3106)	
NOTE: Dimensions shown in parentheses are in millimeters.	Polished Aluminum Dome Bottom Strainer -PDBS	
parentileses are in millimeters.	Vandal Proof Screws -U	
SUFFIX NUMBER	L Speedi-Set Service Weight	
SQUARE RIM DESCRIPTION	02(50), 03(80) & 04"(100) sizes only	
-10 Less NB Rim and Grate	LXH Speedi-Set Extra Heavy	
-11 Less Grate w/NB Rim	02(50), 03(80) & 04"(100) sizes only	
-12 With NB Rim and 1/2 Grate		
-13 With NB Rim and 3/4 Grate		
-14 With NB Rim and Grate with	· ·	
-15 With NB Rim and Aluminum		
-19 With NB Rim and Hinged Gra		
-21 With NB Rim and Grate with	· · ·	
-22 With NB Rim and Grate with		
	8 1/4(210) x 3 1/4(83) x 4 1/2"(115) High Oval NB Funnel	
	6(150) x 2 1/2(64) x 1"(25) High Oval NB Funnel	
-41 With NB Rim and Solid Cove		
-42 With NB Rim and 1/2 Solid C		
-43 With NB Rim and 3/4 Solid C		
-44 With NB Rim and Solid Cove	r with 2 1/2" (64) DIA Center Hole	

BS BS

CKD. BY

EMB

EMB

EMB

EMB

BY

VOLUME

CUBIC FEET

FIGURE NUMBER

3100, 3101

WEIGHT

POUNDS