




# KING SAFETY SEALED IRRIGATION WIRE CONNECTORS

*APPLICATIONS: RESIDENTIAL, COMMERCIAL, AGRICULTURE,  
IRRIGATION, OUTDOOR LIGHTING, AND PUMPS*

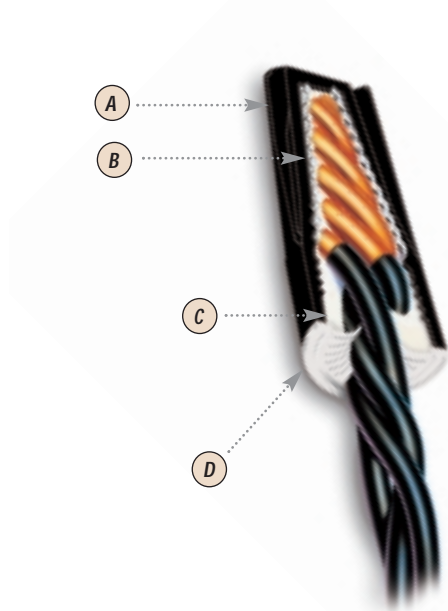

**WE SEAL THE WIRES FIRST!**

## FEATURES AND BENEFITS

**A Black Housing**

Winged style with ribs offers one-step installation along with Ultra-Violet (UV) resistance. Smaller size than competitors maximizes applications.

**B Square Wire Spring**

Lubricated square wire spring draws wires deeper for a long-term, enhanced splice. No pre-twisting necessary for easy installation.

**C Safety Sealant™**

Prefilled white safety sealant never hardens while handling temperature extremes. Dielectric sealant locks out moisture and corrosion.

**D Color Coded Caps**

Three sizes that meet all applications.  
One-step installation or removal, saving time and money.






## CODE/LISTINGS AND MARKS

- Identified for use in wet locations and harsh environments according to UL 50, Raintight/Watertight, testing and Nec 110-11.



- Manufactured under patent #B1 5, 113, 037

# KING SAFETY SEALED WATERPROOF WIRE CONNECTOR SPEC SHEET

SMALL BLACK/WHITE SAFETY SEALED WATERPROOF WIRE CONNECTOR			 <p>WIRE STRIP LENGTH: 1/2"</p>
CATALOG #	SELLING UNIT	SPECIFICATIONS	
61135	Bag of 25	Max Voltage: 300-600V	
61145	Bag of 100	Size: 7/16" x 7/8"	
		Max Temp Rating: 221° F/ 105° C	
		Sealant Temp: -45° F to 400° F	
		Wire Combinations: Copper/Copper	
		Wire Size: 3 #22 - 2 #14	
MEDIUM BLACK/GRAY SAFETY SEALED WATERPROOF WIRE CONNECTOR			 <p>WIRE STRIP LENGTH: 5/8"</p>
CATALOG #	SELLING UNIT	SPECIFICATIONS	
61235	Bag of 20	Max Voltage: 600V	
61245	Bag of 100	Size: 11/16" x 1-5/16"	
		Max Temp Rating: 221° F/ 105° C	
		Sealant Temp: -45° F to 400° F	
		Wire Combinations: Copper/Copper	
		Wire Size: 4 #20 - 3 #10	
		UF Wire 12/2 lighting cable	
LARGE BLACK/BLUE SAFETY SEALED WATERPROOF WIRE CONNECTOR			 <p>WIRE STRIP LENGTH: 11/16 - 3/4"</p>
CATALOG #	SELLING UNIT	SPECIFICATIONS	
61335	Bag of 10	Max Voltage: 600V	
61345	Bag of 50	Size: 13/16" x 1-9/16"	
		Max Temp Rating: 221° F/ 105° C	
		Sealant Temp: -45° F to 400° F	
		Wire Combinations: Copper/Copper	
		Wire Size: 4 #14 - 2 #6	
		UF Cable 12/2 lighting cable	

## QUICK REFERENCE WIRE COMBINATIONS

COMBINATION	2#20	2#14	4#14	6#14	4#12	3#10	2#8	6#12	4#10	2#6 w/ 1 #12
Black/White										
Black/Gray										
Black/Blue										

Complete listing of wire combinations on pages 23-24.