




KING SAFETY SEALED **PROLINE** **WIRE CONNECTORS**

*APPLICATIONS: KING'S ORIGINAL CONNECTOR
FOR GOLF, IRRIGATION, LIGHTING, AND PUMPS*

WE SEAL THE WIRES FIRST!

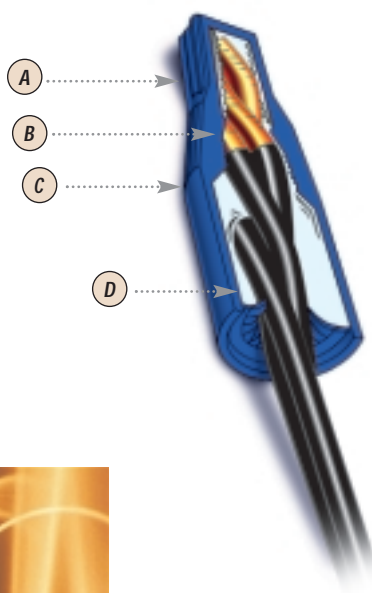

FEATURES AND BENEFITS

(A) Color Coded Housing

Traditional electrical connector colors for quick identification.

(B) Square Wire Spring


Lubricated square wire spring draws wires deeper for a long-term, enhanced splice. No pre-twisting necessary for easy installation.

(C) Direct Bury Housing

High-impact polymer withstands greater compression. Thick wall ergonomic design will not slip in your hand.

(D) Safety Sealant™

Prefilled white safety sealant never hardens while handling temperature extremes. Dielectric sealant locks out moisture and corrosion.

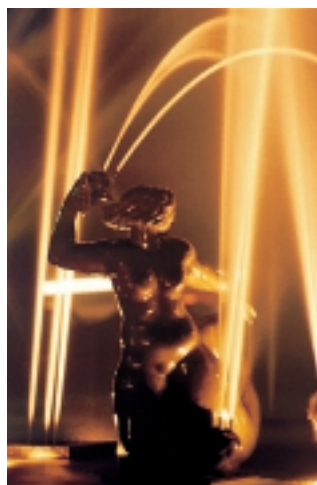

CODE/LISTINGS AND MARKS

- Listed for direct burial according to UL 486D test standard and are CSA C22-2 #198.2 certified.
- Splices can be used with or without junction box, and/or in metallic wireway as specified by articles 110-14(b), 300-5(e), and 305-4(g) of the NEC.



- Manufactured under US Patent #B1 5, 113, 037

KING SAFETY SEALED PROLINE CONNECTOR SPEC SHEET

KING 1 - GRAY PROLINE WATERPROOF/UNDERGROUND PRESSURE TYPE CONNECTOR - DIRECT BURY*

CATALOG #	SELLING UNIT	SPECIFICATIONS
10100	Card of 8	Max Voltage: 300V
10111	Bag of 20	Size: 15/16" x 1/2"
		Max Temp Rating: 167 F/ 75 C
		Sealant Temp: -45° F to 400° F
		Wire Combinations: Copper/Copper
		Wire Size: Min 3 #22 / Max 2 #16



WIRE STRIP LENGTH: 1/2"

KING 2 - BLUE PROLINE WATERPROOF/UNDERGROUND PRESSURE TYPE CONNECTOR - DIRECT BURY*

CATALOG #	SELLING UNIT	SPECIFICATIONS
10200	Card of 8	Max Voltage: 300V
10222	Bag of 20	Size: 1-1/8" x 9/16"
		Max Temp Rating: 167° F/ 75° C
		Sealant Temp: -45° F to 400° F
		Wire Combinations: Copper/Copper
		Wire Size: Min 3 #20 / Max 3 #16



WIRE STRIP LENGTH: 1/2"

KING 3 - ORANGE PROLINE WATERPROOF/UNDERGROUND PRESSURE TYPE CONNECTOR - DIRECT BURY*

CATALOG #	SELLING UNIT	SPECIFICATIONS
10300	Card of 6	Max Voltage: 600-1000V
10333	Bag of 15	Size: 1-15/16" x 9/16"
		Max Temp Rating: 167° F/ 75° C
		Sealant Temp: -45° F to 400° F
		Wire Combinations: Copper/Copper
		Wire Size: Min 3 #20 / Max 2 #14 & 1 #18



WIRE STRIP LENGTH: 1/2"

KING 4 - YELLOW PROLINE WATERPROOF/UNDERGROUND PRESSURE TYPE CONNECTOR - DIRECT BURY*

CATALOG #	SELLING UNIT	SPECIFICATIONS
10400	Card of 4	Max Voltage: 600-1000V
10444	Bag of 10	Size: 1-9/16" x 11/16"
		Max Temp Rating: 167° F/ 75° C
		Sealant Temp: -45° F to 400° F
		Wire Combinations: Copper/Copper
		Wire Size: Min 4 #18 / Max 2 #12



WIRE STRIP LENGTH: 1/2"

KING 5 - RED PROLINE WATERPROOF/UNDERGROUND PRESSURE TYPE CONNECTOR - DIRECT BURY*

CATALOG #	SELLING UNIT	SPECIFICATIONS
10500	Card of 4	Max Voltage: 600-1000V
10555	Bag of 10	Size: 1-3/4" x 13/16"
		Max Temp Rating: 167° F/ 75° C
		Sealant Temp: -45° F to 400° F
		Wire Combinations: Copper/Copper
		Wire Size: Min 2 #14 / Max 4 #12



WIRE STRIP LENGTH: 1/2"

KING 9 - DARK BLUE PROLINE WATERPROOF/UNDERGROUND PRESSURE TYPE CONNECTOR - DIRECT BURY*

CATALOG #	SELLING UNIT	SPECIFICATIONS
10900	Card of 2	Max Voltage: 600-1000V
10999	Bag of 8	Size: 2-7/16" x 1-3/8"
		Max Temp Rating: 167° F/ 75° C
		Sealant Temp: -45° F to 400° F
		Wire Combinations: Copper/Copper
		Wire Size: Min 2 #10 Solid / Max 2 #6 w/1#12



WIRE STRIP LENGTH: 7/8" - 1"

* UL listed as pressure type and CSA certified as both pressure type and direct bury.