

CLASS FIVE™ TOILET K-3611

ADA

Features

- Vitreous china
- Elongated bowl
- ADA compliant when installed following installation notes
- Class Five® flushing system
- 12" (30.5 cm) rough-in
- Less seat and supply
- 2-1/8" (5.4 cm) glazed trapway
- 1.6 gpf (6 lpf) or 1.28 gpf (4.8 lpf)
- Polished chrome trip lever
- 11-1/2" (29.2 cm) x 8-3/4" (22.2 cm) water area
- 29-1/2" (74.9 cm) x 19-5/8" (49.8 cm) x 30-3/8" (77.2 cm)



Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASME A112.19.2/CSA B45.1
- ICC/ANSI A117.1

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Trip Lever	Colors/Finishes	
K-3611	Class Five™ toilet	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3611-RA	Class Five™ toilet	right-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3611-T	Class Five™ toilet with tank cover locks	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3611-TR	Class Five™ toilet with tank cover locks	right-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories					
K-4650	Lustra™ elongated open-front toilet seat - for ADA compliance	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-4653	French Curve™ seat with cover	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-4664	Brevia™ seat with cover	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-7637	Angle supply with stop – 3/8" NPT		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification

The elongated toilet combination shall be made of vitreous china. Toilet shall be 29-1/2" (74.9 cm) in length, 19-5/8" (49.8 cm) in width, and 30-3/8" (77.2 cm) in height with a 11-1/2" (29.2 cm) x 8-3/4" (22.2 cm) water area. Toilet shall be 1.6 gpf (6 lpf) or 1.28 gpf (4.8 lpf), with Class Five™ flushing system. Toilet shall have 2-1/8" (5.4 cm) glazed trapway. Toilet shall be ADA compliant (when installed following installation notes). Toilet shall include polished chrome trip lever. Toilet shall be 12" (30.5 cm) rough-in and less seat and supply. Toilet shall be Kohler Model K-3611-_____-_____.

HIGHLINE®

Technical Information

Fixture:	
Configuration	Two-piece, elongated
Water per flush	1.6 gal (6 L) or 1.28 gal (4.8 L)
Passageway	2-1/8" (5.4 cm)
Water area	11-1/2" (29.2 cm) x 8-3/4" (22.2 cm)
Water depth from rim	6-1/4" (15.9 cm)
Seat post hole centers	5-1/2" (14 cm)


Included components:	
Tank cover	84591
Toilet bowl	K-4298
Tank, left-hand trip lever	K-4632
Tank, right-hand trip lever	K-4632-RA
Trip lever, left-hand	K-9386-L
Trip lever, right-hand	K-9386-R
Trip lever, left-hand, cover lock tanks	K-9386-T-L
Bolt cap accessory pack	1013092
Tank accessory pack	1016548

Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Section 604 states the required height of the toilet is 17" (43.2 cm) to 19" (48.3 cm) from the floor to the top of the seat to meet ADA requirements.

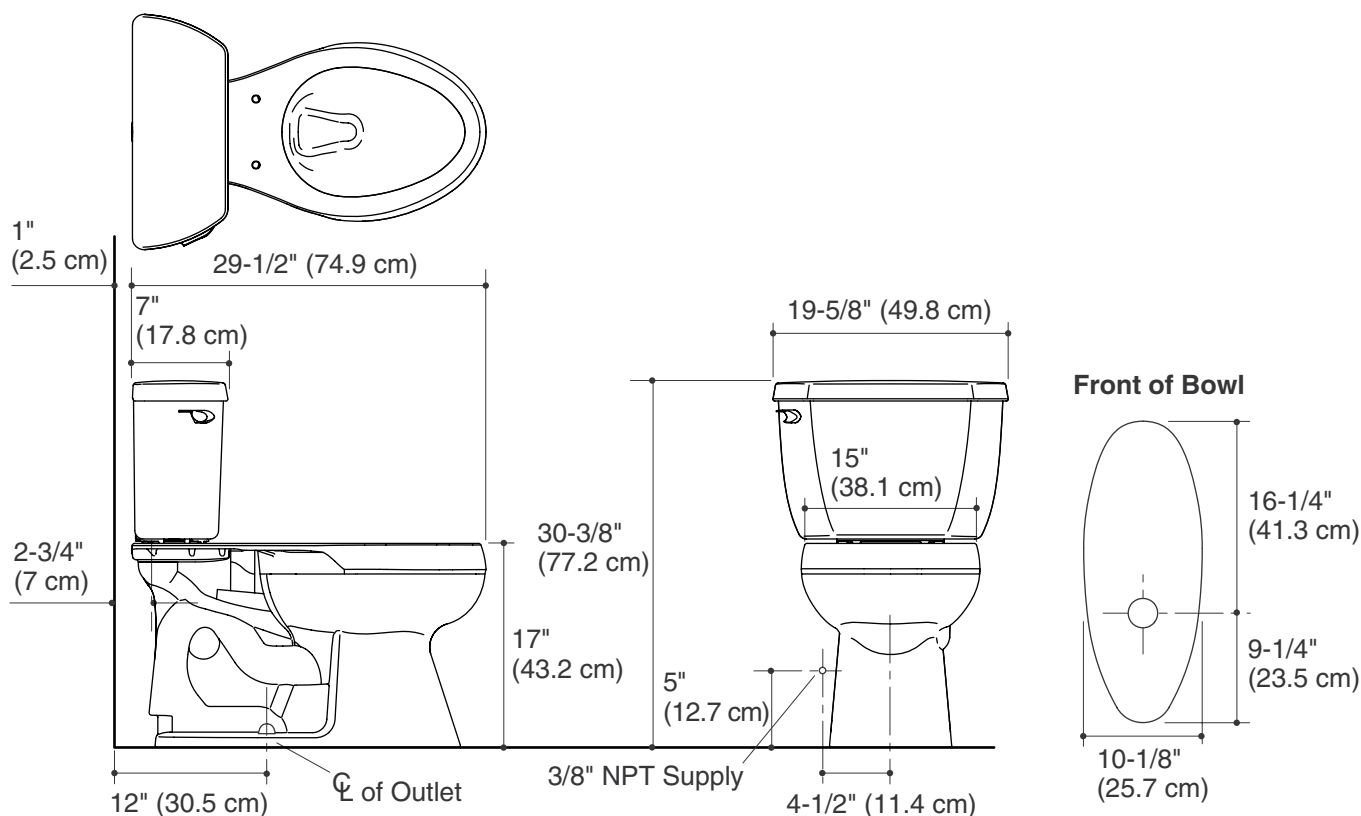

Product Diagram