

Features


- Vitreous china
- Elongated bowl
- Siphon jet
- Wall-mount
- With bedpan lugs (-L)
- 1-1/2" rear spud
- 1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf) depending on flushometer specified
- 10-1/2" (267 mm) x 9" (229 mm) water area
- 26-1/2" (673 mm) x 16-1/2" (419 mm) x 13-1/4" (337 mm)

BOWL
K-4323

ADA

CSA B651

OBC

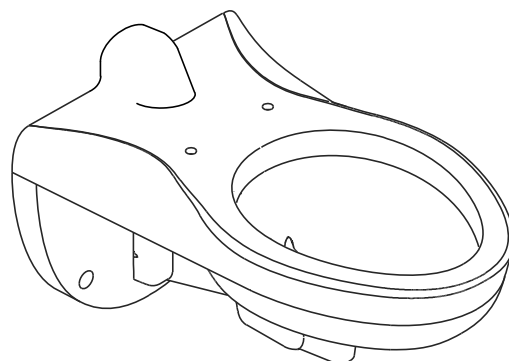

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1
- Energy Policy Act of 1992

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-4323	Bowl – elongated	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4323-L	Bowl – elongated, with bedpan lugs	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
Recommended Accessories			
K-4731-C	Stronghold® open-front elongated seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4731-SC	Stronghold open-front elongated seat with integrated handle	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4731-GC	Stronghold Quiet-Close™ open-front elongated seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Product Specification

The elongated bowl shall be made of vitreous china. Product shall be 26-1/2" (673 mm) in length, 16-1/2" (419 mm) in width, and 13-1/4" (337 mm) in height with a 10-1/2" (267 mm) x 9" (229 mm) water area. Product shall feature a 1-1/2" rear spud and siphon jet. Product shall be for wall-mount installation. Product shall feature 1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf) depending on flushometer specified. Product shall be available with bedpan lugs (-L). Bowl shall be Kohler Model K-4323-____ or K-4323-L-____

KINGSTON™

Technical Information

Fixture*:	
Configuration	rear spud, elongated
Water per flush	1.28 gal (4.8 L) or 1.6 gal (6 L)*
Spud size	1-1/2"
Passageway	2-1/8" (54 mm)
Water area	10-1/2" (267 mm) x 9" (229 mm)
Water depth from rim	5-1/4" (133 mm)
Seat post hole centers	5-1/2" (140 mm)
Minimum static pressure required	35 psi (241.3 kPa)
Maximum static pressure	80 psi (551.6 kPa)
Minimum flowing pressure required	25 psi (172.4 kPa)
Required supply minimum	25 gpm (94.6 lpm)
* Based upon use of a 1.28 gal (4.8 L) or 1.6 gal (6 L) flushometer valve.	

Included components:

Spud	18357
------	-------

Installation Notes


Install this product according to the installation guide.

Refer to manufacturer's instructions and local codes for flushometer requirements.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** Barrier Free requirements when installed per Clause 3.8.3.8 and 3.8.3.9.

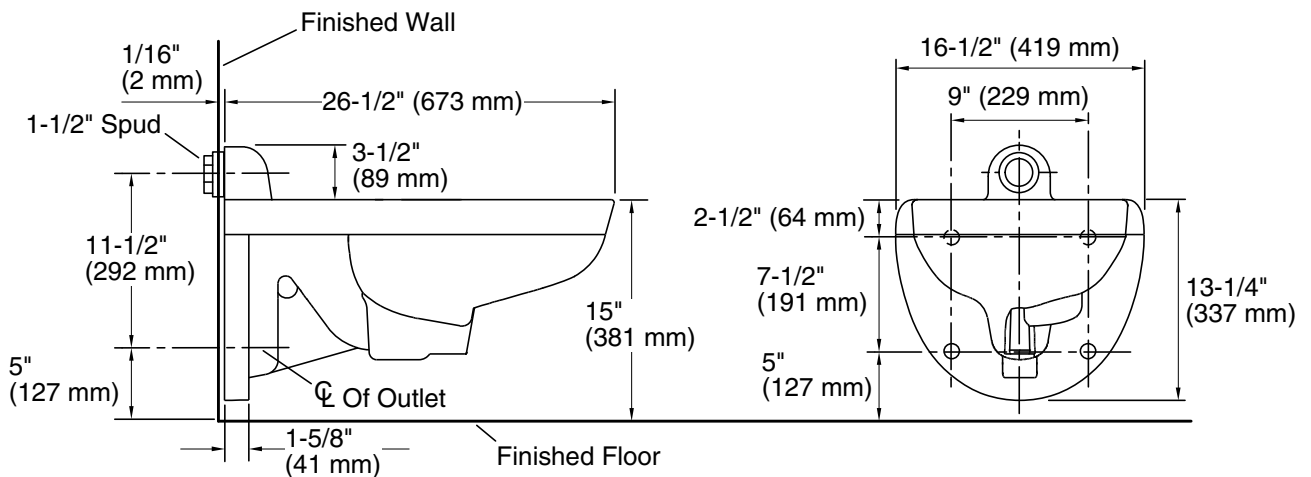

Product Diagram