


Features

- Vitreous china
- With bedpan lugs (-L)
- 10" (25.4 cm) or 12" (30.5 cm) rough-in
- 1-1/2" top spud
- 2-1/4" (5.7 cm) passageway
- 11" (27.9 cm) x 9" (22.9 cm) water area
- 1.28 gpf (4.8 lpf)
- 17-1/8" (43.5 cm) high bowl is ADA compliant
- 28-1/4" (71.8 cm) x 14-7/8" (37.8 cm) x 17-1/8" (43.5 cm)

HIGH EFFICIENCY BOWL K-4405

ADA

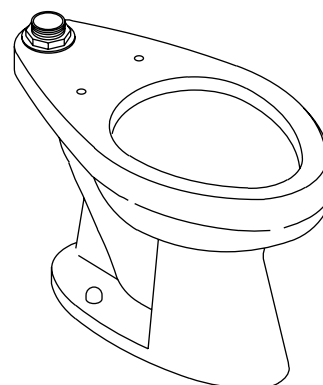

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASME A112.19.2/CSA B45.1
- ICC/ANSI A117.1

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes	
K-4405	Elongated bowl toilet	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4405-L	Elongated bowl toilet with bedpan lugs	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories			
K-4731-C	EB open front seat with check hinge	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4731-SC	EB open front seat with self-sustaining check hinge	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4654	Lustra™ open front seat with support arms and cover	<input type="checkbox"/> 0	
K-4670-CA	Lustra™ open front seat (with anti-microbial agent)	<input type="checkbox"/> 0	
K-4654-A	Lustra™ open front seat with support arms and cover (with anti-microbial agent)	<input type="checkbox"/> 0	
K-10956	1.28 gpf (4.85 lpf) Touchless DC toilet flushometer with Tripoint™ technology	<input type="checkbox"/> CP	

Product Specification:

Bowl shall be 28-1/4" (71.8 cm) long x 14-7/8" (37.8 cm) wide x 17-1/8" (43.5 cm) high. The elongated bowl shall be 10" (25.4 cm) or 12" (30.5 cm) rough-in with 1-1/2" top spud. Bowl shall be made of vitreous china. Bowl shall be 1.28 gpf (4.85 lpf). Bowl shall have 11" (27.9 cm) x 9" (22.9 cm) water area. Bowl shall have 2-1/4" (5.7 cm) passageway. Bowl shall be ADA compliant with 17-1/8" (43.5 cm) high bowl. Bowl shall have bedpan lugs (-L). Bowl shall be Kohler Model K-4405-_____-_____.

HIGHLINE®


Technical Information

Fixture is ADA compliant. ADA	
Fixture:	
Configuration	Top spud, elongated
Water per flush	1.28 gallons (4.85 L)*
Spud size	1-1/2" (3.8 cm)
Passageway	2-1/4" (5.7 cm)
Water area	11" (27.9 cm) x 9" (22.9 cm)
Water depth from rim	6" (15.2 cm)
Seat post hole centers	5-1/2" (14 cm)
* Designed to flush with 1.28 gallons (4.85 L) of water when installed with a 1.28 gpf (4.85 lpf) valve.	
Included components:	
Spud	18357
Bolt cap accessory pack	1013092
Flush valve requirements: For 12" (30.5 cm) rough-in, sweat extension nipple is required. Refer to manufacturer and local codes.	

Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

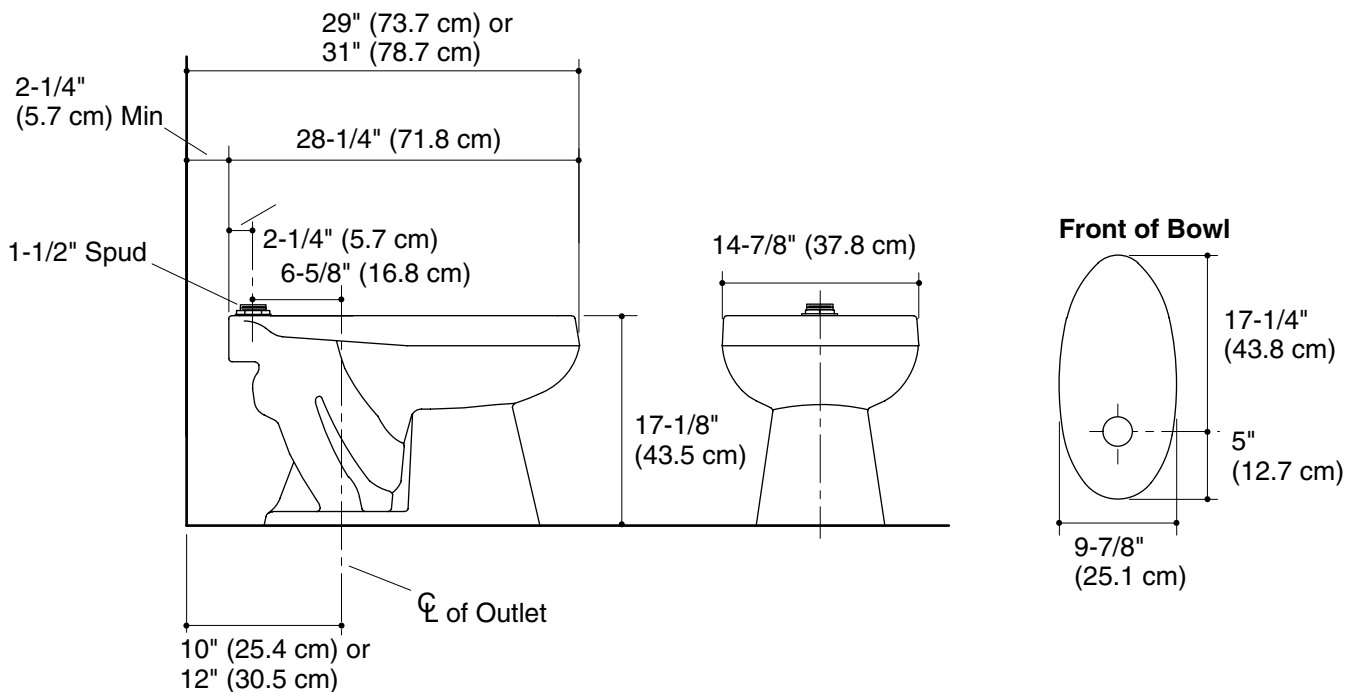

Product Diagram