


Features

- 1-1/2" top spud
- Vitreous china
- Elongated bowl
- Wall-mount
- 1.6 gpf (6 lpf)
- ADA compliant when installed at required height of 17"-19" from floor to top of seat
- With bedpan lugs (-L)
- Siphon jet
- 12-3/8" (31.4 cm) x 11-3/8" (28.9 cm) water area

BOWL
K-4330

ADA

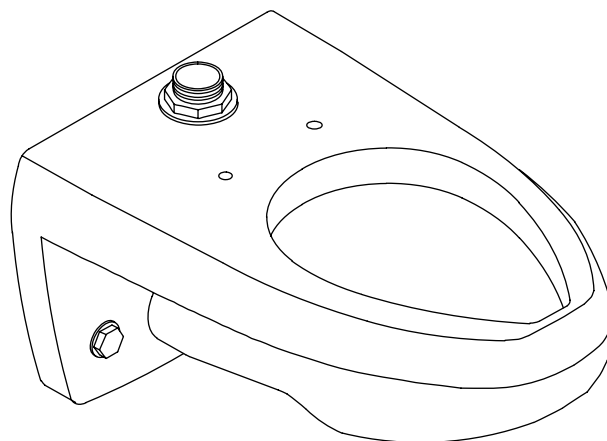

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASME A112.19.2
- ASME A112.19.6
- ICC/ANSI A117.2
- Energy Policy Act of 1992 (EPACT)
- IAPMO/UPC
- CSA B125

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | Colors/Finishes | |
|--------------------------------|---|----------------------------------|--------------------------------------|
| K-4330 | Elongated bowl toilet | <input type="checkbox"/> 0 White | <input type="checkbox"/> Other _____ |
| K-4330-L | Elongated bowl toilet with bedpan lugs | <input type="checkbox"/> 0 White | <input type="checkbox"/> Other _____ |
| Recommended Accessories | | | |
| K-4670-C | Lustra™ open front seat | <input type="checkbox"/> 0 White | <input type="checkbox"/> Other _____ |
| K-4670-CA | Lustra™ open front seat (with anti-microbial agent) | <input type="checkbox"/> 0 White | |

Product Specification:


The elongated bowl shall be wall-mount with a 1-1/2" top spud. Bowl shall be made of vitreous china. Bowl shall have 12-3/8" (31.4 cm) x 11-3/8" (28.9 cm) water area. Bowl shall be 1.6 gpf (6 lpf). Bowl shall be ADA compliant when installed at required height of 17" (43.2 cm) - 19" (48.3 cm) from the floor to the top of the seat. Bowl shall have bedpan lugs (-L). Bowl shall have siphon jet. Bowl shall be Kohler Model K-4330-_____

Technical Information

| | |
|--|---------------------------------------|
| ADA compliant | |
| Fixture: | |
| Configuration | top spud, elongated |
| Water per flush | 1.6 gallons (6 L)* |
| Spud size | 1-1/2" |
| Passageway | 2-1/4" (5.7 cm) |
| Water area | 12-3/8" (31.4 cm) x 11-3/8" (28.9 cm) |
| Water depth from rim | 5-1/4" (13.3 cm) |
| Seat post hole centers | 5-1/2" (14 cm) |
| * Designed to flush with 1.6 (6 L) gallons of water when installed with a 1.6 (6 L) gpf flush valve. | |
| Included components: | |
| Spud | 18357 |
| Flush valve requirements: Refer to manufacturer and local codes. | |

Installation Notes

Install this product according to the installation guide.

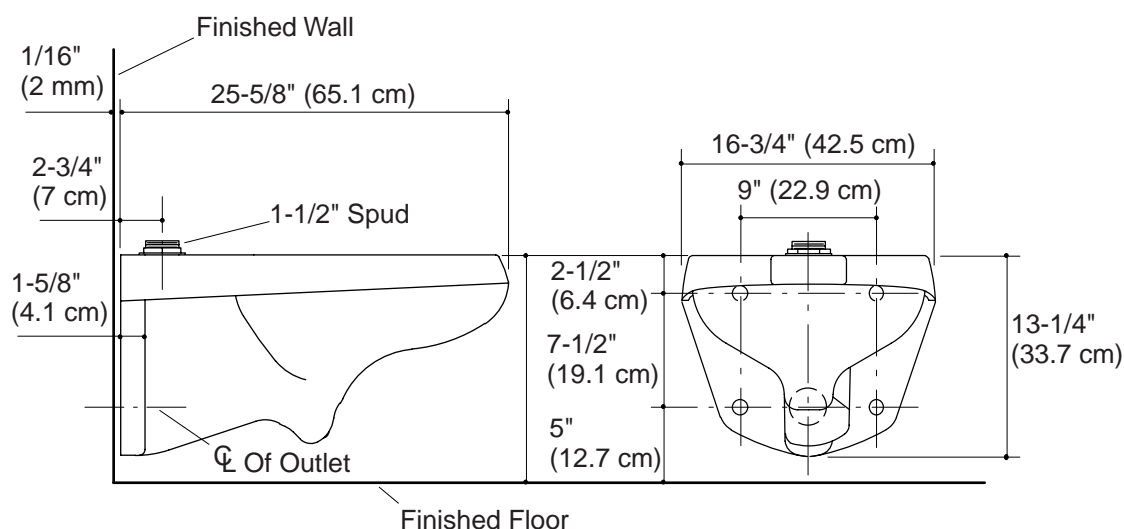

Product Diagram