

Double Swing Tee

**Available
Now!**




- 1½" ACME thread on all connections
- 315 PSI Rated by ASTM F-1970
- Use two Swing Joints from one mainline connection
- Requested by Designers and Contractors
- Use "M" Inlet to connect to 1", 1¼", or 1½" Swing Joints

Use LASCO standard Swing Joint inlet fittings
(sold separately) for connection to any
mainline/ service fitting

(G330-000) ACME	(G350-000) Metric Spigot
(G310-000) Socket	(G320-000) Spigot-short
(G360-000) BSPT	(G370-000) Spigot-long
(G330-000) MIPT	

PART NO.	QUANTITY	PRICE
	(CARTON)	(EA.)
305-015	10	\$4.88

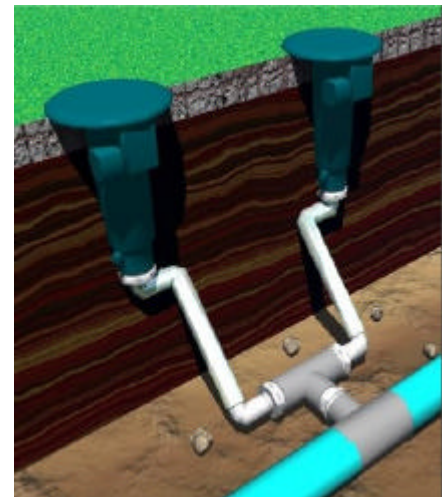

Drawing courtesy of Paul Grainger

LASCO[®]
Fittings, Inc.

414 Morgan Street
PO Box 116
Brownsville, TN 38012
(731) 772-3180 (800) 776-2756
FAX (731) 772-0835
www.lascofittings.com