

LASCO[®]

Fittings, Inc.

**Turf
Irrigation
Products**

List Prices

Effective:

May 28, 2001


Suggested List Price

1/2" & 3/4" PVC Swing Joint Kit

- 315 p.s.i. Pressure Rating (tested to 787 p.s.i.).
- May be used under constant pressure.
- Swing Arm solvent welded in field to meet various trench depths.
- ACME Threads & O-Ring Seals used to eliminate expensive call-backs on leaking Swing Joints.
- Reliable ACME Threads allow freedom of movement while maintaining joint integrity.
- Delivered in two assembled sections.
- Leak proof O-Rings seated in sealing grooves free of parting lines.

- Nine total Inlet & Outlet Configurations available to meet all installation requirements.
- Can be used on bottom or side Inlet Sprinklers and Quick Coupler Valves.
- Full 360° adjustment on three planes to place sprinklers at exact locations.
- Internal "stops" to prevent over-torquing.
- Assembly may be made with PVC Pipe or PVC Flex Hose.

Inlet Style

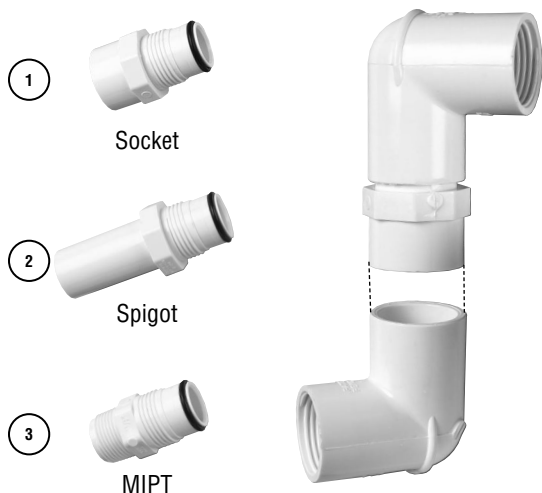

Outlet Style



PART NO.	SIZE (IN.)	QUANTITY (CARTON)	PRICE (EA.)
T5__-100	1/2	10	15.18
T7__-100	3/4	10	17.16

To complete part no., specify:

third digit: inlet style no. 1, 2, or 3

fourth digit: outlet style no. 1, 2, or 4

Example:

You need a 3/4 Swing Joint with a Spigot Inlet and an FIPT Outlet. The part number is T724-100


Notes:

- 1) O-Ring joints must be finger tightened and then backed-off one full turn to allow swing action.
- 2) Installer to cut & solvent weld pipe to desired length.
- 3) Follow approved procedures for solvent welding as per PPI-TR 10.

Compact PVC Swivel Joint

PART NO.	SIZE (IN.)	QUANTITY (CARTON)	PRICE (EA.)
T1105	1/2	10	15.18
T1107	3/4	10	17.16
T1110	1	10	19.97
T1205	1/2	10	15.18
T1207	3/4	10	17.16
T1210	1	10	19.97
T1305	1/2	10	15.18
T1307	3/4	10	17.16
T1310	1	10	19.97
T1410	1 (BSP)	10	22.56


- Factory pre-assembled.
- Pressure rated at 315 p.s.i.
- May be used under constant pressure.
- Your choice of three outlet variations.
 - Series T11 – Female Pipe Threads
 - Series T12 – Swivel Male Pipe Threads
 - Series T13 – Male Pipe Threads
- All with a Swivel Male Threaded Inlet.

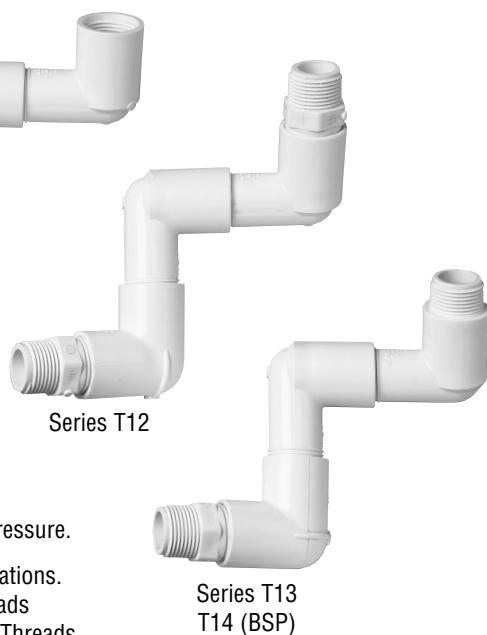

Suggested List Price

1/2" & 3/4" Variable Length Swing Joint

Inlet Style

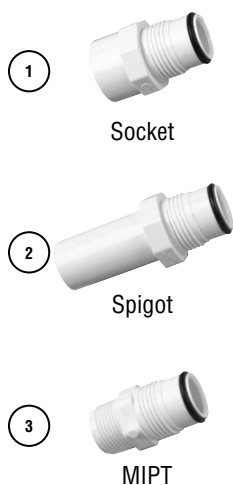

Outlet Style



- Factory assembled to lengths shown below.
- 315 p.s.i. pressure rating (tested to 787 p.s.i.).
- May be used under constant pressure.
- ACME Threads & O-Ring Seals used to eliminate expensive call-backs of leaking joints.
- Reliable ACME Threads allow freedom of movement while maintaining joint integrity.
- Leak proof O-Rings seated in sealing grooves free of parting lines.
- Nine total Inlet & Outlet configurations available to meet all installation requirements.
- Can be used on bottom or side Inlet Sprinklers & Quick Coupler Valves.
- Full 360° adjustment on three planes to place sprinklers at exact locations.
- Internal "Stops" to prevent over-torquing.

LAY LENGTH	CODE NO.
6"	06
8"	08
10"	10
12"	12
14"	14
16"	16
18"	18
20"	20
24"	24

PART NO.	SIZE	QUANTITY	PRICE
	(IN.)	(CARTON)	(EA.)
T5__-3__	1/2	10	24.12
T7__-3__	3/4	10	26.90

To complete part no., specify:

third digit: inlet style no. 1, 2, or 3

fourth digit: outlet style no. 1, 2, or 4

sixth & seventh digits: lay length code no. from chart to the left.

Example:

You need a 3/4 Swing Joint with a Spigot Inlet and an FIPT Outlet that is 8 inches long. The part number is T7 2 4 -308

Notes:

- 1) O-Ring joints must be finger tightened and then backed-off one full turn to allow swing action.
- 2) Follow approved procedures for solvent welding as per PPI-TR 10.

LASCO®

Fittings, Inc.

Headquarters

414 Morgan Street
Brownsville, TN 38012
731/772-3180
800/776-2756
Fax: 731/772-0835

Service Centers

6131 Knott Avenue
Buena Park, CA 90620
714/690-9679
800/995-2726
Fax: 714/736-1780

4780 Holly Street, Unit A
Denver, CO 80216
303/388-7204
888/388-5450
Fax: 303/388-7199

3450 Vineland Road
Orlando, FL 32811
407/648-5955
800/437-3155
Fax: 407/649-7999

311 Richert
Wood Dale, IL 60191
630/860-7402
888/995-7414
Fax: 630/860-7416

3401 Pennsy Drive
Ardmore-Ardwick Industrial Park
Landover, MD 20785
301/322-3377
800/882-5462
Fax: 301/772-1627

1228-A Crowley Circle
Carrollton, TX 75006
972-446-8776
800/642-8104
Fax: 972/466-2280

22473 72nd Avenue South
Kent, WA 98032
253/872-0185
888/285-2726
Fax: 253/395-0221

Three-Year Limited Performance Warranty

All LASCO Full Circle Swing Joints are warranted to be free from defects . . . to be leak-free when properly installed . . . not to rust, rot, or corrode by electrolytic action. If not as warranted, LASCO will repair or replace defective units within three years.

See the complete warranty in the LASCO Swing Joint brochure, L06-SJ-1.

DO NOT USE LASCO FITTINGS FOR COMPRESSED AIR OR GASES.

DO NOT TEST PVC PIPING SYSTEMS WITH COMPRESSED AIR OR GASES.

DO NOT USE FITTINGS WITH LIQUIDS NOT RECOMMENDED BY LASCO.

MODIFICATIONS OF FITTINGS VOIDS THE WARRANTY.

Standard Terms and Conditions of Sale

1. **Terms:** 2% 35 days, net 45 days.
2. **Freight:** FOB LASCO warehouses. Prepaid on orders for products only totaling \$1000 net for one shipment to single destination within the contiguous United States.
3. **Minimum Order:** \$50 net. Smaller orders billed at this minimum charge.
4. **Claims** for shipping errors must be made within 15 days to LASCO. Claims for damage or shortages should be directed promptly to the common carrier by the consignee.
5. **Returns** will be accepted only by prior authorization and if shipped freight prepaid. Returned merchandise subject to a 20% handling/restocking charge.
6. **Pricing** is subject to change without prior notice. However, prior notification will be given in the event of price changes in the period between order placement and scheduled shipment.
7. **Offer** to sell is not implied by possession of this or other LASCO price lists.

All LASCO Swing/Swivel Joints are pressure rated at 315 p.s.i. @ 73° F.

LASCO Swing Joint products conform to specifications and testing in accordance with ASTM D-3139.



Visit our worldwide website
<http://www.lascofittings.com>