

7600 Showermaster®


76-1A 1/2" inlets & outlet CONCEALED PIPING

7600 Thermostatic Showermaster®

- Tub/shower installation
- Copper encapsulated thermostat assembly with brass shuttle, compensates for temperature fluctuations induced by water temperature and pressure changes
- Built-in shutoff for single handle operation
- Integral checkstops
- Cast wall flange and lever handle, polished chrome plated
- Maximum operating pressure: 125 PSI (860 KPA)
- Adjustable high temperature limit stop set for 110°F (43°C)
- Color-coded dial
- 1/2" sweat inlets and outlet, threaded bottom outlet.
- H-02 Shower head (2.5GPM, 9.5 l/min), with arm and flange

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

Note: All piping and fittings not furnished by manufacturer.

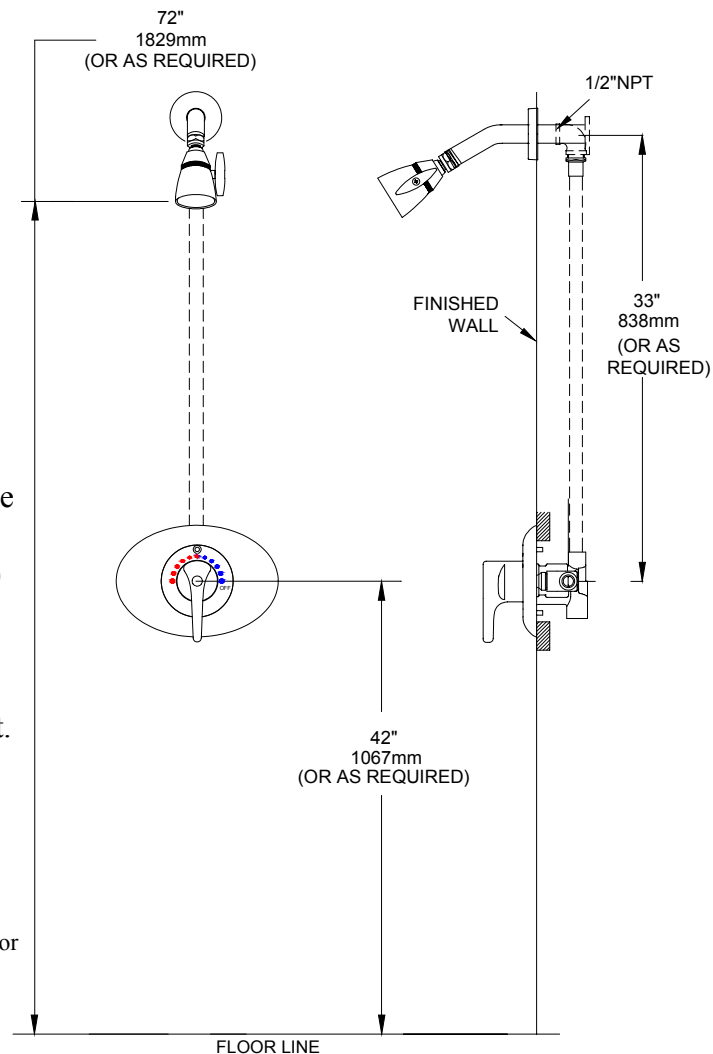

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____