

THERMOSTATIC MIXING VALVE

MODEL 270

THERMOSTATIC POINT OF USE MIXING VALVE

MODEL ½" inlets, ½" outlet, (MIPS connections)

MATERIALS:

- Bronze body
- Locked temperature adjustment cap (vandal resistant)
- Copper encapsulated thermostat assembly with polymer thermoplastic shuttle
- Stainless steel springs
- Buna-N: O'rings
- Integral check valves on hot and cold inlets

PRESSURE-TEMPERATURE:

- Minimum Flow: 0.5 GPM (1.9 l/min)
- Maximum Pressure: 125 PSI (8.6 BAR)
- Maximum Hot Water temperature: 200°F - (93°C)
- Approach Temperature 5°F (2.8°C) above set point.

ASSE 1017 Certified





ASSE 1070 Certified



OPTIONS:

- ___ SUFFIX BRKT- Mounting bracket
- ___ SUFFIX BV- Inlet ball valves (shipped loose)
- ___ SUFFIX SW- Sweat connections

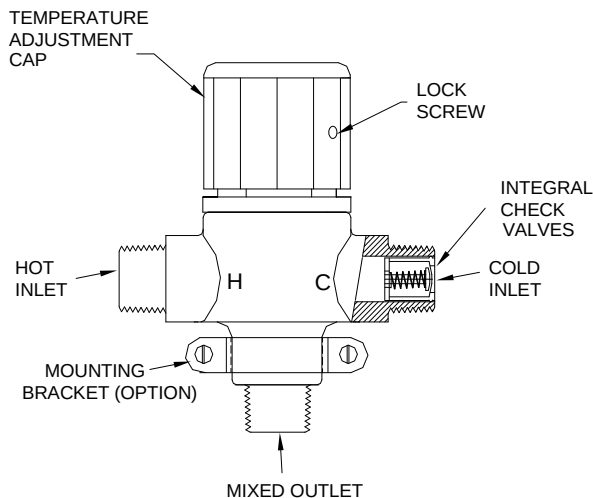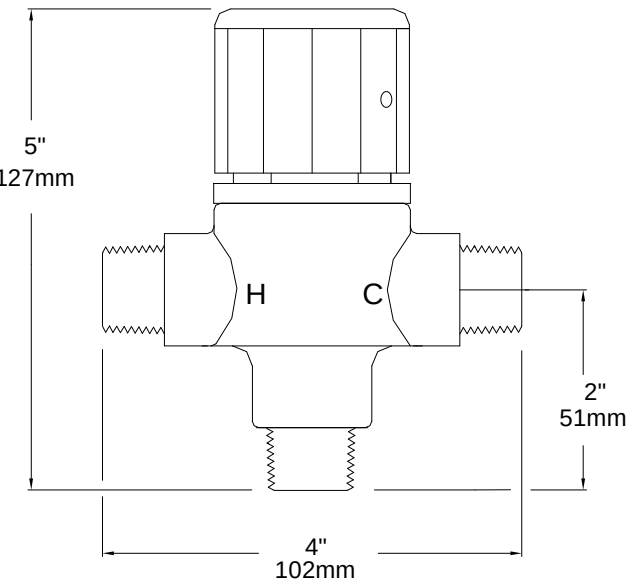

PRESSURE DROP						
5	10	20	30	40	50	PSI
.35	.70	1.4	2.1	2.8	3.4	BAR
3.5	5.5	7.5	9.5	10.5	12	GPM
13	21	28	36	40	45	l/min

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>