


Tag:
Series : FCI600

METAL *AIRE®
Submittal No: FCI600-ECM

Fan Power Air Terminal

Model: FCI600-ECM Series Fan Power Air Terminal with E.C.M.

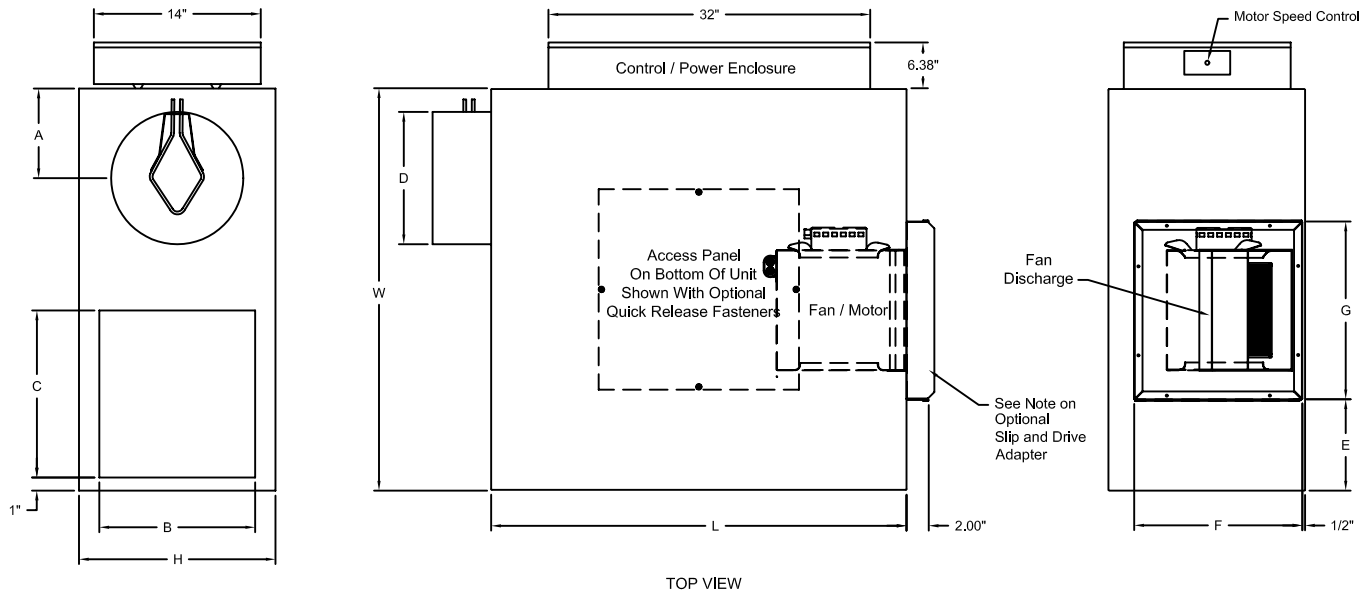

Submittal Number FCI600-ECM

Casing Size	Inlet Diameter D		Horse Power	Unit Height H	Unit Width W	Unit Length L	Inlet Loc. A	Ind. Inlet Height B	Ind. Inlet Width C	Discharge Loc. E	Discharge Height F	Discharge Width G
	Standard	Optional										
2	8 (203)	6, 10, 12	1/2	17 1/2 (445)	30 (762)	36 (914)	7 (178)	14 (356)	14 (356)	7 (178)	15 (381)	16 (406)
4	12 (305)	8, 10, 14	1/2	17 1/2 (445)	36 (914)	40 (1016)	8 (203)	14 (356)	18 (457)	8 (203)	17 1/2 (445)	20 (508)
6	16 (406)	10, 12, 14	1	20 (508)	42 (1067)	42 (1067)	10 (254)	16 (406)	20 (508)	9 (228)	18 (508)	22 (559)

Dimensions are in inches (mm); Airflow CFM (L/s) and Product Information is Subject to Change Without Notice

* "A" Dim will increase or decrease 1" as the inlet diameter increases or decreases 2" from the standard inlet diameter.

** For Fan CFM @ a specific ESP see catalog for Fan Curves.

Note: If ordering with optional discharge slip and drive adapter see FCI600-HW submittal with Hot Water Coil located on the Discharge Port for overall dimensions.

Notes: (☐ check if provided)

1. Available Options	2. Construction Details	2. Construction Details (Cont.)
☐ Reinforced foil covered fiberglass, no exposed edges ☐ Engineered polymer closed cell foam ☐ 1" Thick disposable filter and filter frame ☐ Quick Release Access Door	- Units are 22 gauge minimum galvanized steel - All insulations meet NFPA 90A and UL 181 - Access Panel - Screw Mounted	- Standard insulation dual density, coated fiberglass, all exposed edges sealed - Flanged discharge - All insulation 1" (25.4mm)

Submittal No. FCI600-ECM

Date: 03/08/2007

Dimensions are in inches (mm)

Page: 1 of 1