


Tag:
Series : FCL600

METAL*AIRE®
Submittal No: FCL-616-C4-HW

Fan Power Air Terminal Low Profile

Model: FCL-616-C4-HW Series Fan Power Air Terminal Low Profile - Case Size 4 - Inlet 16" x 8"
With Hot Water Coil Located on the Discharge Port

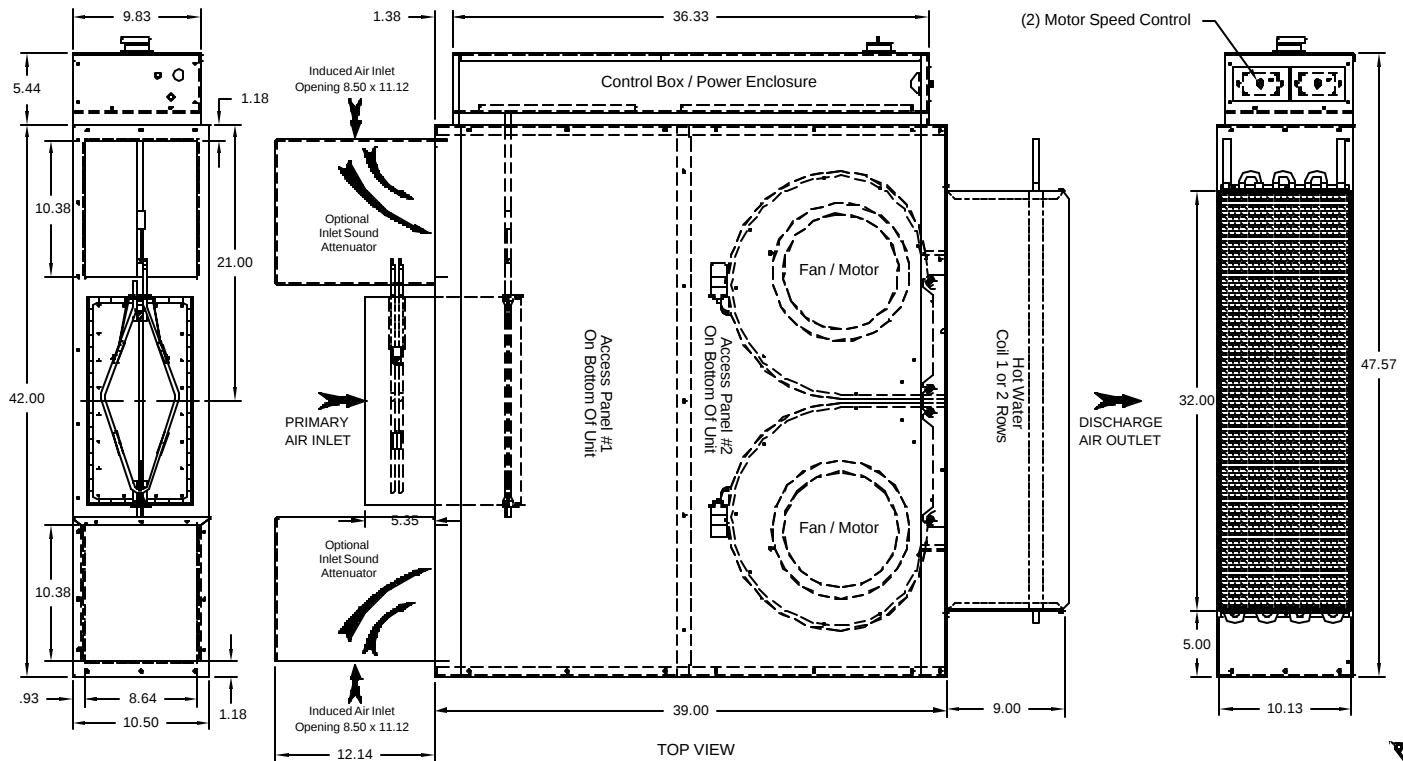

Submittal Number FCL-616-C4-HW

Unit Size	Inlet Diameter	Unit Height	Unit Width	Unit Length	Inlet Loc.	Ind. Inlet Height	Ind. Inlet Width	Standard Hot Water Coil, 1 Or 2 Rows			
	Standard							Discharge Loc.	Discharge Length	Discharge Height	Discharge Width
4	16 (406) x 8 (203)	10 1/2 (267)	42 (1067)	39 (991)	21 (533)	8.64 (219)	10.38 (264)	5.00 (127)	9 (229)	10 1/8 (257)	32 (813)

Dimensions are in inches (mm); Airflow CFM (L/s) and Product Information is Subject to be Change Without Notice

** For Fan CFM @ a specific ESP see catalog for Fan Curves.

Electrical Data

Unit Size	Motor HP	Motor Full Load Amps		
		120V 1Ø 60 Hz	208/240V 1Ø 60 Hz	277V 1Ø 60 Hz
4	1/4	5.8	2.4	1.8

Notes: (☐ check if provided)

1. Available Options	2. Construction Details	2. Construction Details (Cont.)
☐ Reinforced foil covered fiberglass, no exposed edges ☐ Engineered polymer closed cell foam ☐ 1" Thick disposable filter and filter frame ☐ Inlet Sound Attenuator.	- Units are manufactured with 22-gauge casing and 20-gauge inlet valve assembly - All insulations meet NFPA 90A and UL 181	- Standard insulation dual density, coated fiberglass, all exposed edges sealed - Flanged discharge - All insulation 1/2" (12.7mm)

Submittal No. FCL-616-C4-HW

Date: 04/04/2005

Dimensions are in inches (mm)

Page: 1 of 1